
COR10290




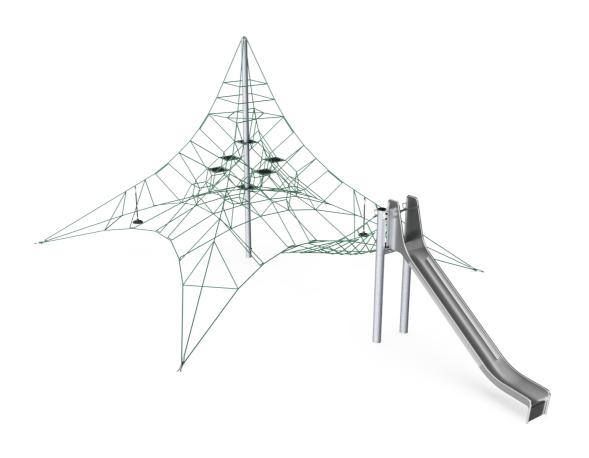


The Macro Spacenet with extensions encourages children to climb, again and again. The feeling of achievement when having climbed to the top is phenomenal. Climbing or swaying on the bouncy pendulum seats trains the motor skills' ABC: Agility, Balance and Coordination. Major muscle groups get used when children climb in the Macro Spacenet. All

these physical skills are fundamental and can help with children's ability to sit still and concentrate. The slide is a great way down, making an irresistible loop of climbing up and sliding down, training turn taking, too. The rope trails are nice destinations for a break and stimulate children's social-emotional skills, such as courage and self regulation.

| Item no. COR102901-1103 | | | | |
|-----------------------------|-----------------|--|--|--|
| General Product Information | | | | |
| Dimensions LxWxH | 1296x795x535 cm | | | |
| Age group | 5+ | | | |
| Play capacity (users) | 46 | | | |
| Color options | | | | |

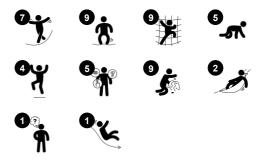

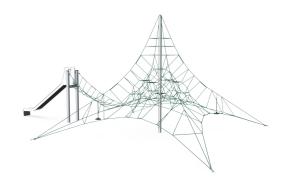


COR10290





Physical: sliding develops spatial awareness and a sense of balance. Furthermore, the core muscles are trained when sitting upright going down. Social-Emotional: empathy stimulated by turn-taking.

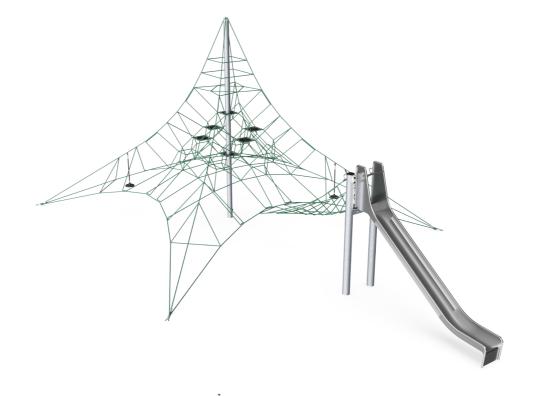









Physical: swaying movement supports the sense of balance as well as core and arm muscles when holding tight. Social-Emotional: socializing and turn-taking when deciding who should sit here.



Big meshes

Physical: the big meshes allow for climbing and crawling, supporting proprioception, cross coordination and spatial awareness. Climbing here takes muscle strength, pushing and pulling arms to get upwards. Social-Emotional: allow more children being seated together, sharing.



Highest rungs

important life skills.



Physical: spatial awareness is supported,

Emotional: children develop courage, self-

confidence, consideration and turn-taking, all

arm muscles when holding tight. Social-





Physical: the slightly swaying mast stimulates children's muscles and motor skills when they hold tight climbing the net. Social-Emotional: children develop courage and self-regulation when climbing up high. This positively affects self-confidence.





Physical: the stiff bounce of the lower rung

strengthens bone density when jumping

supports balance and coordination as well as

down. Hanging from the arms trains back and

upper body muscles, supporting good posture.

These are a growing concern for children due

to sedentary lifestyles. Social-Emotional: great meeting point allowing socializing.

Sturdy, lower rungs



Physical: the bouncy membrane develops the sense of balance when the child stands, steps or sits here. A faster way up, due to the extra support of the membrane. Social-Emotional: a meeting point for retreat from the rope landscape.







COR10290





Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand. The ropes are highly wear-and vandalism-resistant and can be replaced at site if needed.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.



Corocord membranes consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armouring made of woven polyester. The armouring and the two surface layers result in a total thickness of 7.5 mm.



Installation Information Max. fall height 200 cm Safety surfacing area 119.5 m² Total installation time 21.4 Excavation volume 9.93 m³ Concrete volume 6.32 m³ Footing depth (standard) 110 cm Shipment weight 948 kg Surface Anchoring options In-ground **Warranty Information** Corocord rope 10 years Membrane 2 years S-Clamps 10 years Spare parts quaranteed 10 years Steel post HDG Lifetime

Item no. COR102901-1103



In the centre of the net is the mast, made of high quality seamless steel. The structure of the mast as an oscillating support is statically favourable and equalizes the oscillations in the net. The masts are hot dip galvanised as standard, with the design option of additional powder coating.



The spacenets' main bearing ropes are equipped with an additional safety feature: should the main connections fail, the safety rope prevents collapse of the structure.



For installations using rubber surfacing the turnbuckle protectors are to be ordered separately.



3 / 11/14/2024 Data is subject to change without prior notice.

Sustainability Data

COR10290





| Cradle to Gate A1-A3 | Total CO ₂ emission | CO₂e/kg | Recycled materials |
|----------------------|--------------------------------|------------|--------------------|
| | kg CO₂e | kg CO₂e/kg | % |
| COR102901-1103 | 2,199.65 | 3.04 | 54.72 |

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: $\mathrm{COR314011}$ -1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

made

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO_2 calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000





COR10290



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

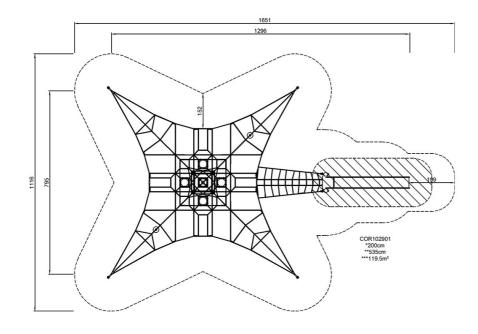

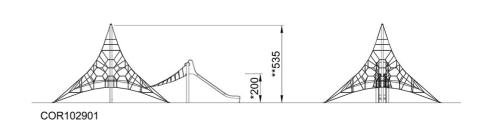

Attention! Foundation anchor blocks exceeds safety zone area. See installation instructions.