Hill Climber Rope with EPDM

CRP630301



Item no. CRP630301-0901				
General Product Information				
Dimensions LxWxH	8'7"x0'7"x4'6"			
Age group	2 - 12			
Play capacity (users)	2			
Color options	•			



The fun of fundamentals makes children play repeatedly: the Hill Climber invites and supports rappelling up steep hills. The excellent combination of stemming the feet onto the hill, holding tight to the rope, and leaning back, walking upwards is a repeatedly thrilling experience. Apart from being great fun, the combination of movement also provides great gross motor and muscle training. Hands, arms and upper body get trained when gripping the perfectly sized rope, legs get trained walking upwards, and core muscles are put to work when leaning back, tensioning the core.

The motor skill training is intense: spatial awareness, sense of balance, and coordination

come to full use. This stimulates the child's overall motor confidence and helps train the ability to judge distances, which is essential in street traffic.



Hill Climber Rope with EPDM

CRP630301

Hill climber rope with discs

when rappelling together.

Physical: trains cross coordination, balance and muscle strength. Cross coordination also stimulates cross-modal perception, necessary for skills such as reading. Social-Emotional: the discs define sections so that children develop turn-taking and cooperation skills

88






Hill Climber Rope with EPDM

CRP630301



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made of +95% Post-consumer materials and is inductively melted onto each strand to obtain excellent wear and tear resistance.



The steel surfaces are hot-dip galvanized inside and outside with lead-free zinc. The galvanization has excellent corrosion resistance in outside environments and requires minimal maintenance.



The Corocord Smart Clamps are carefully designed to ensure superior flexibility in highquality aluminum material. The smart clamps are attached around the post with four steel bolts. Unused attachment points are closed with PA caps.

Item no. CRP630301-0901				
Installation Information				
Max. fall height		0'0"		
Safety surfacing area		0ft²		
Total installation time		2.2		
Excavation volume	1.2	24yd³		
Concrete volume	0.0	69yd³		
Footing depth (standard)		2'11"		
Shipment weight		68lbs		
Anchoring options	In-ground	~		

KO

Warranty Information				
Chains	10 Years			
Corocord Rope	10 Years			
EPDM components	2 Years			
Hot dip galvanized steel	Lifetime			
Spare Parts Availability	10 Years			



Through the KOMPAN Variant Team, you can choose between additional 7 rope colors and customize your solution. The assortment is a wide span of colors ranking from elegant and expressive black or a natural, neutral hemp color, to a range of attractive and eye-catching signal colors.



Hill climber ropes are ideal embankment play products, usable on slopes of 20-60° and available in various lengths.

Elevated activities	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present			
Required			

ASTM F1487 compliant



Sustainability Data

Cradle to Gate A1-A3

CRP630301-0901

CRP630301



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark







Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Total CO2

emission

kg CO₂e

78.70

CO2e/kg

kg CO₂e/kg

3.24

Recycled

materials

%

42.25

By Bureau Veritas HSE

www.bureauveritas.dk

+45 7731 1000




CRP630301


* Max fall height | ** Total height | *** Safety surfacing area



* Max fall height | ** Total height



CRP630301 ** 4'-6" / 137cm

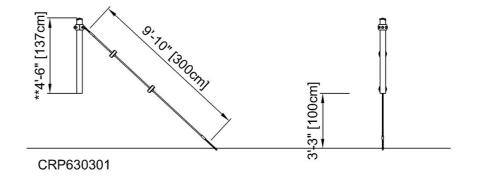

Click to see TOP VIEW

Click to see SIDE VIEW

5 / 05/23/2024