## **One Seat Swing**

NRO901



| Item no. NRO901-1001        |               |  |
|-----------------------------|---------------|--|
| General Product Information |               |  |
| Dimensions LxWxH            | 175x30x195 cm |  |
| Age group                   | 2+            |  |
| Play capacity (users)       | 1             |  |
| Colour options              |               |  |



The sturdy rubber seat of the One Seat Swing is an irresistible invitation for the child to lean in and swing. Children simply love to swing on the One Seat Swing, there are many reasons for this, firstly; when the swing seat responds back to the movements of the child, this cause and effect learning can be repeated and challenged each time. Secondly, the rubber seat is placed at the right height for a child to lie on their stomach, and push their feet to feel the swinging motion. This trains the child's motor skills, specifically the sense of balance and space. These are both fundamental to navigate the surroundings securely. The emotional value of swinging independently is priceless for toddlers' self esteem. widening their physical comfort zone. Parents and peers can easily join the fun.



# **One Seat Swing**

NRO901





Low, rubber swing seat Physical: support for pushing with feet, developing leg muscles and sense of balance, coordination, as well as spatial awareness. Social-Emotional: self-confidence is fostered from being able to do it yourself. Cognitive: understanding of cause and effect.



### **One Seat Swing**



NRO901



All Organic Robinia products by KOMPAN are made of Robinia wood from sustainable European sources. On request it can be supplied as FSC® Certified (FSC® C004450).



The standard seats of KOMPAN swings is engineered for maximum safety and durability. The two component seat with a PP inner core and outside rubber is produced in one operation. The seats are available with swing chains of either hot dip galvanised steel or stainless steel for all swings heights.



Swing suspensions are made of polyamide and consist of double ball bearing system with swivel.

#### Installation Information

| Max. fall height         | 100 cm      |  |
|--------------------------|-------------|--|
| Safety surfacing area    | 11.4 m²     |  |
| Total installation time  | 2.3         |  |
| Excavation volume        | 0.14 m³     |  |
| Concrete volume          | 0.07 m³     |  |
| Footing depth (standard) | 100 cm      |  |
| Shipment weight          | 133 kg      |  |
| Anchoring options        | In-ground 🗸 |  |

| Warranty Information          |          |  |
|-------------------------------|----------|--|
| PUR components                | 10 years |  |
| Robinia wood                  | 15 years |  |
| Spare parts guaranteed        | 10 years |  |
| Stainless steel<br>components | Lifetime |  |



The Robinia wood can be supplied as untreated raw wood or painted with a brown coloured transparent pigment that maintains the golden wood colour of the wood.



## **Sustainability Data**

Cradle to Gate A1-A3

NRO901-1001

NRO901



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



#### Verification of CO, calculation of: Nature play



Data version no. 2023-10-05

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Nature play" represented by item no.: NR0409-0621.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

### mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO, calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



www.bureauveritas.dk +45 7731 1000



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Total CO2** 

emission

kg CO<sub>2</sub>e

35.01

CO2e/kg

kg CO<sub>2</sub>e/kg

0.37

Recycled

materials

%


2.18




NRO901

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area



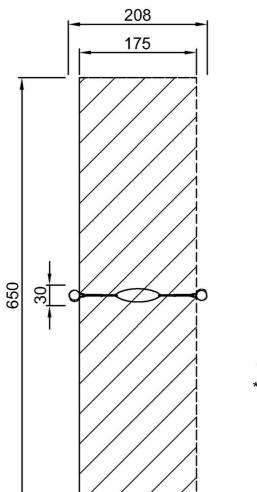

NRO901 \*100cm \*\*195cm \*\*\*11.4m<sup>2</sup>

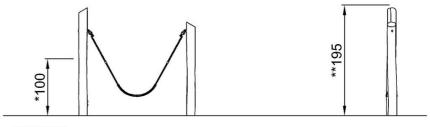

\* Max fall height | \*\* Total height

NRO901

Click to see TOP VIEW

Click to see SIDE VIEW

5 / 11/20/2024