# **Pull Up Station**

FPW208



Item no. FPW20800-0900		
General Product Information		
Dimensions LxWxH	273x11x240 cm	
Age group	8+	
Play capacity (users)	2	
Colour options		

The vertical ladder can be used as a wall, to influence difficulty levels of various exercises such as hand stand push ups, Bulgarian split squats and push ups. Additionally the vertical ladder is perfect for stretching and offers a step up for reaching the pull up bar. The Pull Up Bar is made from solid steel and has a diameter of Ø32 mm. An ideal size to have a good grip.

# **Pull Up Station**

FPW208





The post is made of Ø101.6 x 2mm, pregalvanised carbon steel and powder coated which is a great protection solution for all climate conditions.



The connectors are made of die-cast aluminium.

connectors are stainless steel and protected by

specially alloyed for the outdoor environments

and heavy usage. The screws attaching the

zinc washers.



All bars intended for pull ups are made of solid, ø32mm x 138m, hot-dip galvanised, S235JR steel bars. This diameter gives the right grip for all users.

Item no. FPW20800-0900			
Installation Information			
Max. fall height	23	3 cm	
Safety surfacing area	25.0 m²		
Total installation time	3.0		
Excavation volume	0.53 m³		
Concrete volume	0.28 m³		
Footing depth (standard)	90 cm		
Shipment weight	130 kg		
Anchoring options	In-ground 🗸		
	Surface	~	
Warranty Information			
Galvanised/painted metal	10 years		
Galvanised Steel	Lifetime		
Spare Parts Guarantee	10 years		



## **Sustainability Data**

Cradle to Gate A1-A3


FPW20800-0900

FPW208



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark







#### Data version no. 2023-10-05

The  $CO_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Fitness" represented by item no.: FAZ10100-0900.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

### mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Total CO2** 

emission

kg CO<sub>2</sub>e

138.70

CO2e/kg

kg CO<sub>2</sub>e/kg

1.93

Recycled

materials

%

68.36





FPW208



\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

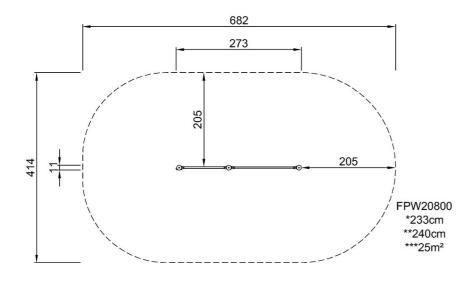

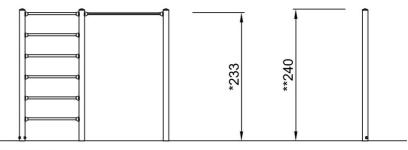

FPW20800

Click to see TOP VIEW

4 / 10/21/2024