
PCM81221





The Trio Climber is a playground favorite with school children. They are immediately attracted to the dense, versatile activity hub. Thanks to the varied climbing opportunities with swaying ropes, rope ladders and stable climbing wall with cleats and climb-through-holes, all children have a chance of doing something. The openness in design also invites conversation

and social interaction across the Trio Climber. This supports children's socio-emotional development and invites all in. With its combination of activities, the Trio Climber stimulates children's cross-coordination, strength and bone density. All of these abilities are built for life in childhood. So the more they play, the more they gain.







PCM81221





Pipe climber

Physical: muscle strength, cross coordination, and spatial awareness when climbing. Social-Emotional: encourage socialising when seated on the bars.









Vertical side ropes with steps Physical: children develop cross-body

coordination and muscle strength when using the rope to climb the steps. Their sense of balance is trained when swaying gently. Social-Emotional: turn-taking when children pass each other.







Overhead ladder

Physical: develops children's upper body muscles and arm strength, cross coordination and spatial awareness. This is especially important due to sedentary lifestyles and back-pain in children. Social-Emotional: chill and socialize on top of the overhead ladder, training cooperation.







Climbing wall

Physical: develops children's cross coordination, eye-hand coordination, and muscle strength when climbing. Social-Emotional: two-sided climb invites cooperation.



Climbing net



Physical: children develop cross-body

coordination and muscle strength when

proprioception and spatial awareness. Social-

Emotional: the big meshes allow for more

climbing. The big mesh supports

children to sit together and talk.



Rope ladder

Physical: climbing the ladder supports cross coordination and trains leg and arm muscles.





PCM81221



Lifetime

10 years

10 years

10 years



Main posts with hot dip galvanized steel footing are available in different materials: Pressure impregnated pine wood posts. Pre-galvanized inside and outside with powder coated top finish steel posts. Lead free aluminum with color anodized top finish. Greenline TexMade posts of 95% post-consumer recycled PE and textile waste.



Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco-friendly material, which is not only recyclable after use but also consists of a core produced from 100% recycled material.




The steel surfaces are hot-dip galvanised inside and outside with lead-free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.



Installation Information					
Max. fall height		224 cm			
Safety surfacing area		42.1 m²			
Total installation time		11.2			
Excavation volume		1.58 m³			
Concrete volume		0.75 m³			
Footing depth (standard)		90 cm			
Shipment weight		511 kg			
Anchoring options	Surface	~			
	In-groun	d 🗸			
Warranty Information					
EcoCore HDPE		Lifetime			

Item no. PCM81221-0950



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand.



KOMPAN GreenLine versions are designed with ultimate environmentally friendly materials with lowest possible CO2e emission factor. TexMade post, EcoCoreTM panels of 95% post-consumer recycled waste and molded PP decks.



Galvanised Steel

Spare Parts Guarantee

Ropes & Nets

Post

3 / 05/23/2024 Data is subject to change without prior notice.

Sustainability Data

PCM81221





C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Freestanding play equipment



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: GXY916012-3417.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:



Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO_2 calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023





(Cradle to Gate A1-A3	Total CO ₂ emission	CO₂e/kg	Recycled materials
		kg CO₂e	kg CO₂e/kg	%
	PCM81221-0950	670.25	1.95	71.17
	PCM81221-0901	826.31	2.95	54.43


The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))


PCM81221



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

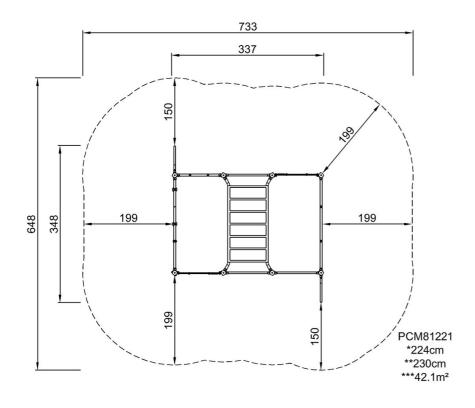

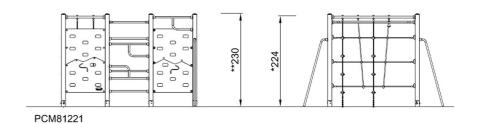

Click to see TOP VIEW

Click to see SIDE VIEW