


# SkyTwister, Physical

COR29900

**KOMPAN**  
Let's play



Item no. COR299001-0405	
<b>General Product Information</b>	
Dimensions LxWxH	552x861x503 cm
Age group	5+
Play capacity (users)	30
Color options	

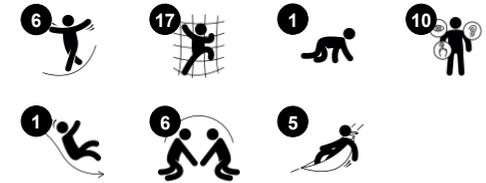

WOW! The Sky Twister Physical is an activity packed, intriguing play magnet for children. The twisted frame contains a rich variety of climbing, swaying play that makes children want to come back again and again. On ground level, the swaying loop invites a break, and the many suspended ropes offer swaying seats and climbs. Combined with the inclined, horizontal net, the lower level of the Twisted

Tower offers an inviting, varied and responsive meeting point for all. When swaying and climbing in the ropes and inclined nets of the SkyTwister, children intensely train their sense of balance and coordination. These crucial motor skills build the capability to move confidently and securely through the world. Additionally climbing trains all major muscle groups. On top of the Twisted Tower awaits a

wildly fascinating destination: a view and a meeting point on bouncy membrane flooring with fascinating optic see-through panels that change the way the world looks. The transparency of the Twisted Tower, from bottom to top, makes it a play unit for intense cooperation, consideration and communication across levels and activities. A place to make friends.




# SkyTwister, Physical

COR29900



The graphic panels are made of high-quality polycarbonate with a thickness of 6mm. The graphic print consist of an inner layer is the image and outer transparent layer which function as protection. Both PC panel and the water-based lacquer are UV stabilized to prevent fading of the print.

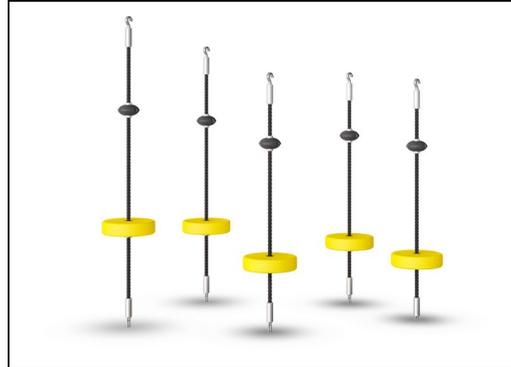

Fully coloured EPDM rubber discs with smooth surface. The moulded EPDM surrounds a hot dip galvanised steel core that ensures both the stability of the discs and durable fixation to the rope.




Hangout pod designed with a welded frame of two steel rings which are hot dip galvanized and powder coated. The membrane consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance.

Item no. COR299001-0405

## Installation Information

Max. fall height	245 cm
Safety surfacing area	49.9 m <sup>2</sup>
Total installation time	35.2
Excavation volume	9.60 m <sup>3</sup>
Concrete volume	3.40 m <sup>3</sup>
Footing depth (standard)	90 cm
Shipment weight	1,988 kg
Anchoring options	In-ground ✓

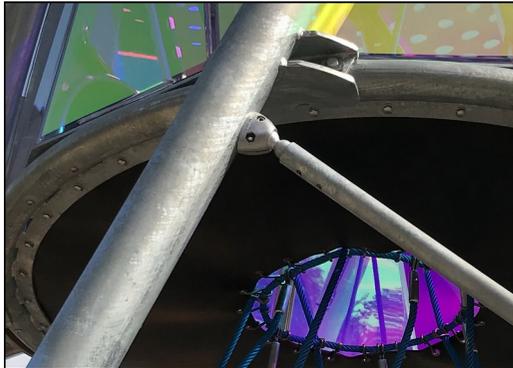

The steel surfaces are hot dip galvanized inside and outside with lead free zinc. The galvanization has excellent corrosion resistance in outside environments and requires low maintenance.



Curved and straight tunnel slide of either PE or stainless-steel material and supported by multiple steel rods to a center steel post. The tunnel slides are designed with perfect curve and inclination for a playful ride.



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand. The ropes are highly wear- and vandalism-resistant and can be replaced at site if needed.



# Sustainability Data

COR29900



Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO <sub>2</sub> e/kg	Recycled materials
	kg CO <sub>2</sub> e	kg CO <sub>2</sub> e/kg	%
<b>COR299001-0405</b>	4,416.80	2.98	41.80

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Kompan A/S**  
 C.F. Tietgens Boulevard 32C  
 DK-5220 Odense SØ  
 Denmark



## Verification of CO<sub>2</sub> calculation of: Corocord



Data version no. 2023-10-05

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

**Date: 30. October 2023 | Valid until: 30. October 2025**

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

**Publication date: 30. October 2023**

By Bureau Veritas HSE  
 www.bureauveritas.dk  
 +45 7731 1000





# SkyTwister, Physical

COR29900

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

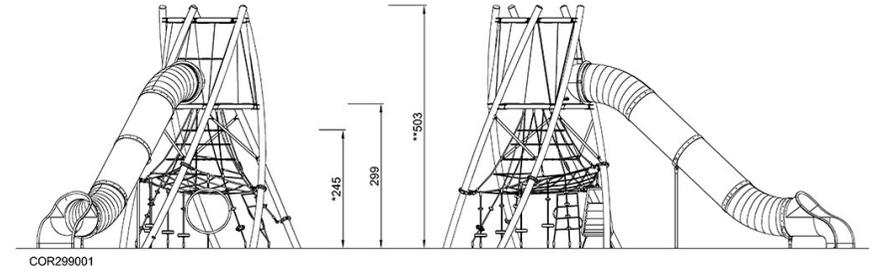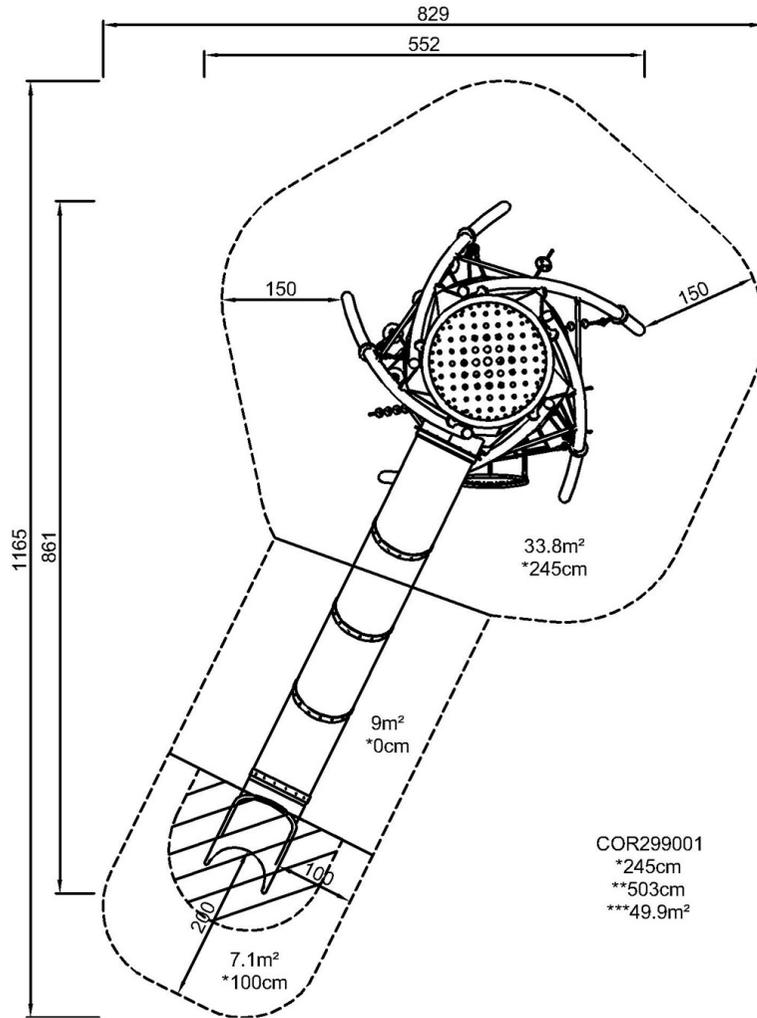

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)