Giant XL

PCT110521






General Product Information

Dimensions LxWxH 968x1136x891 cm

Age group 6+

Play capacity (users) 60

Colour options





WOW! The Giant XL's sky-high climb-slidemeet features attract all children hugely. The unique variety of speedy slides and glides, gentle sways and stays and not least wild climbs attract vigorous play, over and over. The see-through towers are meandering inside, developing children's muscles and coordination with steep steps and open ropes. The open and closed slide and the challenging banister bars offer each their fast ride. Severe fun, stimulating social-emotional skills such as self-regulation and empathy. The varied climbing activities add choice for all, the transparent climbs add thrill. Climbing here trains cross-coordination, sense of space and muscles. Low climbing walls create an inviting frame for play

shells, talking tube, hammock and tic-tac-toe on ground level. This space is for all to socialize and participate in play.

Giant XL

PCT110521









Large hammock

Physical: sense of balance when swaying, body pressure when lying. Support users lying or seated. Social-Emotional: meeting, pushing friends gently back and forth, turntaking.











Internal transparent climbing panel

Physical: supports cross coordination, which supports cross-modal perception. Also trains leg, arm and hand strength. Social-Emotional: the see-through panel allows you to watch and contact friends on ground level when up high. Cognitive: the see througheffect adds a feeling of thrill when used up



Tic-tac-toe panel




Social-Emotional: stimulates communication







permanence.





High spiral tube slide

on slide mouth.



Physical: develops spatial awareness, sense

of balance, trains core muscles when sitting

upright going down. Social-Emotional: thrill

when going down fast. Empathy stimulated by

turn-taking. Feeling of security when stopping







density Social-Emotional: turn-taking and

risk-taking.








Fireman's pole

Physical: supports coordination, arm and core muscles. Landing strengthens bone density. Social-Emotional: turn-taking and risk-taking.





Giant XL

PCT110521





Panels of 19mm EcoCore[™]. EcoCore[™] is a highly durable, eco-friendly material, which is not only recyclable after use but also consists of a core produced from 100% recycled material.



All decks are supported by unique designed low-carbon aluminum profiles with multiple attachment options. The grey colored molded decks are made of 75% post-consumer waste PP material with a non-skid pattern and texture surface.



The main posts have an alloy with improved tensile and yield strength to ensure the structural integrity of the high towers are maintained. The posts have a hot-dip galvanised base and powder coated top finish which ensure longevity.



Installation Information Max. fall height 279 cm Safety surfacing area 109.5 m² Total installation time 221.9 hours Excavation volume 13.06 m³ Concrete volume 5.19 m³ Footing depth (standard) 90 cm Shipment weight 4,064 kg Anchoring options In-ground Surface

Item no. PCT110521-0902

Warranty Information EcoCore HDPE Lifetime PP Decks 10 years Ropes & Nets 10 years Spare Parts Guarantee 10 years Steel post HDG Lifetime



Panels are manufactured from high-quality polycarbonate with a thickness of 15mm. The graphic prints are added by a unique multi-layer print process where the inner layer is the image and outer transparent layer functions as protection. Both PC panel and the water-based lacquer are UV stabilised to prevent fading.



Fully welded steel frame with 45° cross welded steel grid of round steel pins with a diameter of 4mm. The airflow panel contributes to the overall structural integrity of the GIANT towers.



Curved and straight tunnel slide of either PE or stainless-steel material and supported by multiple steel rods to a centre steel post. The tunnel slides are designed with perfect curve and inclination for a playful ride.



Sustainability Data

PCT110521





Cradle to Gate A1-A3	Total CO ₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
PCT110521-0902	9,284.26	2.88	49.72

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Play systems



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Play systems" represented by item no.: PCM200321-0950.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.


Publication date: 30. October 2023


By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000 PCT110521



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

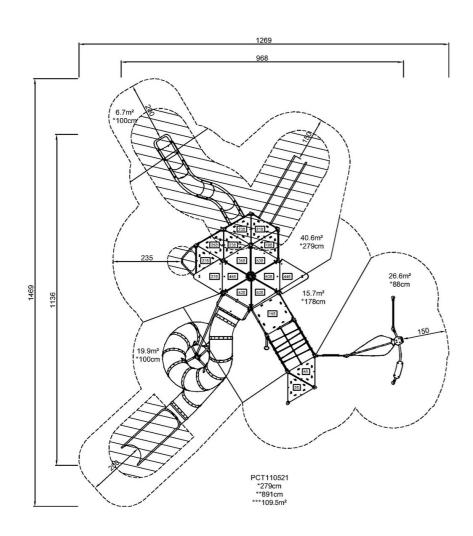

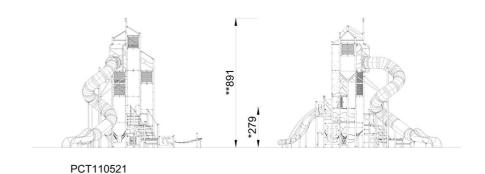

Click to see TOP VIEW

Click to see SIDE VIEW