
KSL30704



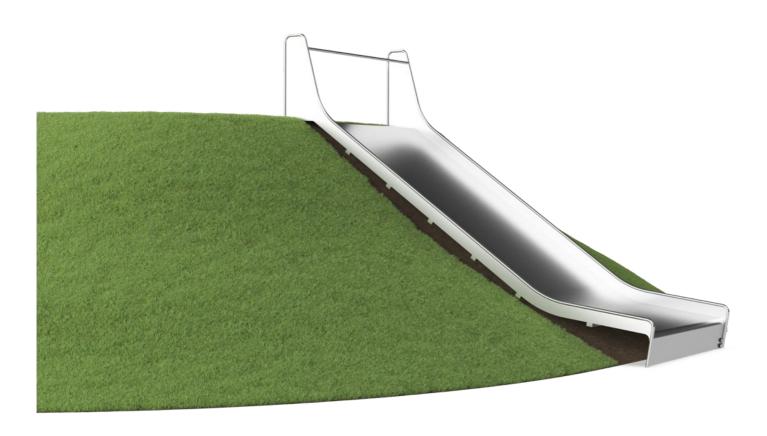

Item no. KSL30704-0401

General Product Information

Dimensions LxWxH 453x204x347 cm
Age group 3+
Play capacity (users) 2
Colour options









The extra wide Embankment Slide is extremely attractive. It makes children loop up hill and slide down again and again. The Embankment Slide will be a main attraction in a playground. Apart from the immense thrill of sliding, the Embankment Slide also supports children in developing important motor skills such as the sense of balance and space. These are

important in managing the world confidently and securely. The repeated loop of sliding and running back up is great training of cardio and muscle strength. The extra width adds a highly desirable rough-and-tumble element to play, when friends go down the slide together. This is a social-emotional benefit, which is further enhanced by the cooperation skills that

children use when slide together.






KSL30704





Wide slide

Physical: develops spatial awareness, sense of balance and trains core muscles when sitting upright going down. Social-Emotional: invites socialising, supports parent-child and peer-to-peer play. Cognitive: young children develop their understanding of space, speed and distances when sliding down.

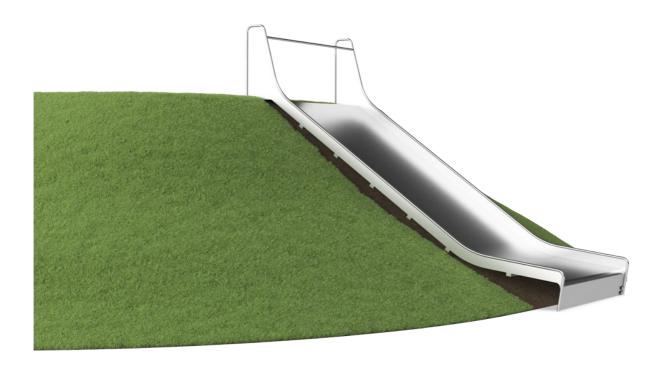

KSL30704






The stainless steel components are made of high-quality stainless steel in compliance with global playground standards. The steel is glass blasted after manufacturing to ensure a smooth gliding surface.



At 35°, the slide is set to the optimum angle to ensure children experience thrilling slides while maintaining safety.

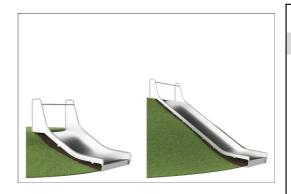

Catering to different terrains, the embankment slides are available in 9 lengths ranging from 1 - 3 meters.

Installation Information Max. fall height 100 cm Safety surfacing area 31.4 m² Total installation time 9.9 Excavation volume 1.49 m³ Concrete volume 0.95 m³ Footing depth (standard) 110 cm Shipment weight 666 kg Anchoring options In-ground ✓ Warranty Information Spare Parts Guarantee 10 years Stainless Steel Slide 10 years	Item no. KSL30704-0401			
Safety surfacing area 31.4 m² Total installation time 9.9 Excavation volume 1.49 m³ Concrete volume 0.95 m³ Footing depth (standard) 110 cm Shipment weight 666 kg Anchoring options In-ground ✓ Warranty Information Spare Parts Guarantee 10 years	Installation Information			
Total installation time 9.9 Excavation volume 1.49 m³ Concrete volume 0.95 m³ Footing depth (standard) 110 cm Shipment weight 666 kg Anchoring options In-ground ✓ Warranty Information Spare Parts Guarantee 10 years	Max. fall height	100 cm		
Excavation volume 1.49 m³ Concrete volume 0.95 m³ Footing depth (standard) 110 cm Shipment weight 666 kg Anchoring options In-ground ✓ Warranty Information Spare Parts Guarantee 10 years	Safety surfacing area	31.4 m²		
Concrete volume 0.95 m³ Footing depth (standard) 110 cm Shipment weight 666 kg Anchoring options In-ground ✓ Warranty Information Spare Parts Guarantee 10 years	Total installation time	9.9		
Footing depth (standard) Shipment weight Anchoring options Marranty Information Spare Parts Guarantee 10 years	Excavation volume	1.49 m³		
Shipment weight 666 kg Anchoring options In-ground Warranty Information Spare Parts Guarantee 10 years	Concrete volume	0.95 m³		
Anchoring options In-ground Warranty Information Spare Parts Guarantee 10 years	Footing depth (standard)	110 cm		
Warranty Information Spare Parts Guarantee 10 years	Shipment weight	666 kg		
Spare Parts Guarantee 10 years	Anchoring options	In-ground 🗸		
Spare Parts Guarantee 10 years				
	Warranty Information			
Stainless Steel Slide 10 years	Spare Parts Guarantee	10 years		
	Stainless Steel Slide	10 years		



Sustainability Data

KSL30704





C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Freestanding play equipment



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: GXY916012-3417.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:


mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO_2 calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



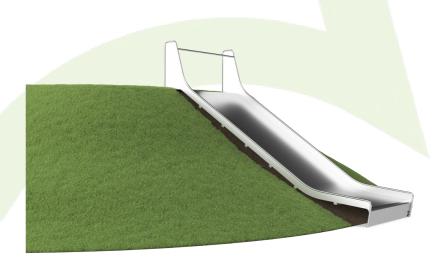

Cradle to Gate A1-A3	Total CO₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
KSL30704-0401	1,430.04	4.20	49.98


The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

KSL30704



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

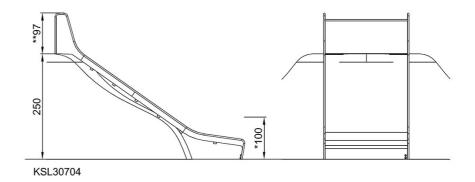

Click to see SIDE VIEW