


# Daisy

KPL110

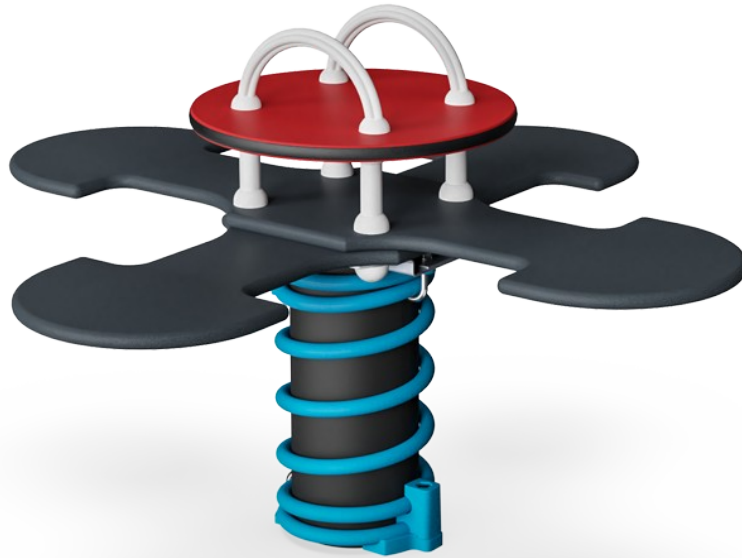

The springer is a playground classic with a strong appeal to all children. Every springer in our range is just waiting for a child to unlock its imaginative potential.

|                             |               |
|-----------------------------|---------------|
| Item no. KPL110-0411        |               |
| General Product Information |               |
| Dimensions LxWxH            | 100x100x65 cm |
| Age group                   | 2+            |
| Play capacity (users)       | 4             |
| Colour options              | ●             |




# Daisy

KPL110



## Handhold

**Physical:** the vertical handgrips ensure a firm grip at different heights, necessary for rocking intensely. This trains hand and arm muscles.

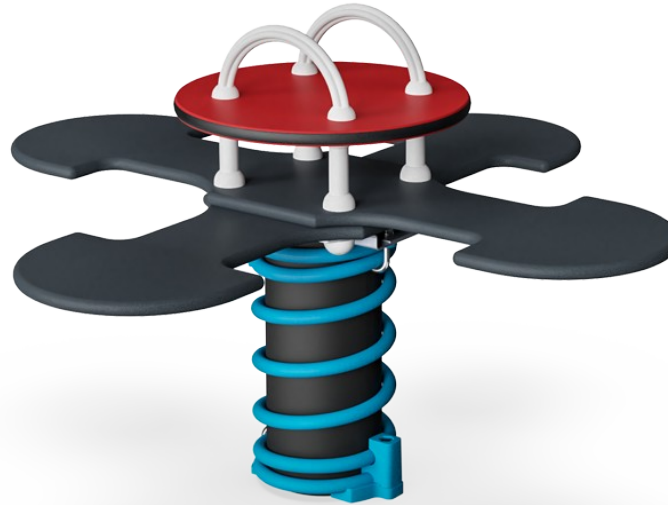

## Rocking together

**Social-Emotional:** the possibility of rocking two together trains cooperation skills. Consideration of others when rocking.



## Rocking spring

**Physical:** response to movements adds to spatial awareness and sense of balance. These are fundamental motor skills that help the child's ability to sit still on a chair which takes a good sense of balance. **Cognitive:** trains the understanding of cause and effect: when I move my body, the spring responds with movement.

# Daisy

KPL110



Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.



KOMPAN Springs are made of high quality spring steel according to EN10270. The springs are cleaned by phosphating before they are painted with an epoxy primer and a polyester powder coating as top finish. The springs are fixed by unique anti pinch fittings for maximum safety and long lifetime.



The springs are fixed by unique anti pinch fittings for maximum safety and long lifetime.



Foot support is made of HPL with a thickness of 17,8mm with a very high wearing strength and a unique KOMPAN nonskid surface texture.



Handholds are made of injection moulded high quality nylon (PA6). PA6 has good wearing and impact strength.




The springs are fixed by unique anti pinch fittings for maximum safety and long lifetime. The springs have a PUR insert for stabilizing the spring.

|                                 |                          |
|---------------------------------|--------------------------|
| Item no. KPL110-0411            |                          |
| <b>Installation Information</b> |                          |
| Max. fall height                | 60 cm                    |
| Safety surfacing area           | 9.6 m²                   |
| Total installation time         | 2.0                      |
| Excavation volume               | 0.15 m³                  |
| Concrete volume                 | 0.00 m³                  |
| Footing depth (standard)        | 45 cm                    |
| Shipment weight                 | 38 kg                    |
| Anchoring options               | In-ground ✓<br>Surface ✓ |
| <b>Warranty Information</b>     |                          |
| EcoCore HDPE                    | Lifetime                 |
| Handle                          | 10 years                 |
| HPL seat                        | 15 years                 |
| Spare parts guaranteed          | 10 years                 |
| Springs                         | 5 years                  |



# Sustainability Data

KPL110

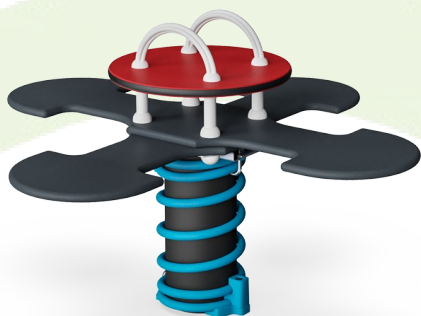


| Cradle to Gate A1-A3 | Total CO <sub>2</sub> emission | CO <sub>2</sub> e/kg    | Recycled materials |
|----------------------|--------------------------------|-------------------------|--------------------|
|                      | kg CO <sub>2</sub> e           | kg CO <sub>2</sub> e/kg | %                  |
| KPL110-0411          | 100.04                         | 2.75                    | 27.66              |

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Kompan A/S**  
C.F. Tietgens Boulevard 32C  
DK-5220 Odense SØ  
Denmark



## Verification of CO<sub>2</sub> calculation of: Freestanding play equipment



Data version no. 2023-10-05

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: GXY916012-3417.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

**Date: 30. October 2023 | Valid until: 30. October 2025**

**Verified by:**

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.


**Publication date: 30. October 2023**

**By Bureau Veritas HSE**  
www.bureauveritas.dk  
+45 7731 1000




\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

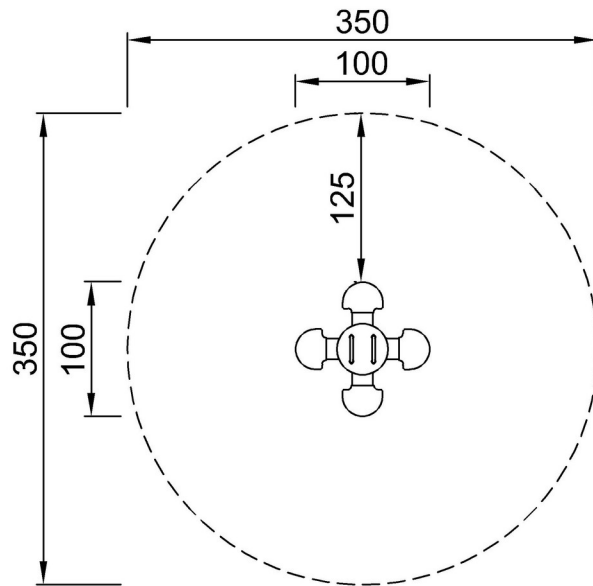

KPL110  
\*60cm  
\*\*65cm  
\*\*\*9.6m<sup>2</sup>

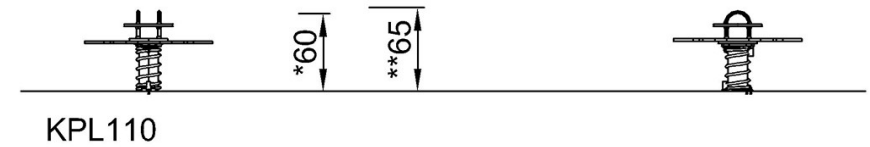

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)