


# Penta Climber

PCM81331



|                             |                |
|-----------------------------|----------------|
| Item no. PCM81331-0950      |                |
| General Product Information |                |
| Dimensions LxWxH            | 287x322x339 cm |
| Age group                   | 5 - 12         |
| Play capacity (users)       | 8              |
| Colour options              |                |

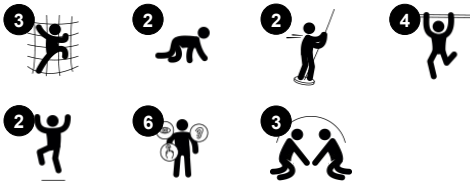

Wow! The Penta Climber attracts children with its five posts' play abundance. The variety of climb, glide and socialize activities encourage children to play for longer and come back again and again. The Penta Climber offers ample climbing. The richly varied climbing features train proprioception and cross-body coordination. These motor skills are

fundamental for navigating the world securely and they also benefit reading skills. The Climbing Wall, Pipe Climber and Climbing Pole add challenges for moving up as well as across, training muscles. The Horizontal Net offers a great and transparent destination for breaks and talkative play. The Banister Bars and Fireman's Pole are thrilling egresses, and

the jumping down builds bone density. Apart from all the climbing and gliding, there are plenty of opportunities for socializing and making friends - which adds to play duration.




# Penta Climber

PCM81331



## Pipe climber

**Physical:** muscle strength, cross coordination, and spatial awareness when climbing. **Social-Emotional:** encourage socializing when seated on the bars.



## Horizontal spider net

**Physical:** crawling the net supports cross coordination. **Social-Emotional:** place to meet and hang for many children seated, lying or hanging.



## Climbing pole

**Physical:** cross coordination and muscle strength are trained. **Social-Emotional:** turn-taking and cooperation.



## Banister bars

**Physical:** coordination is supported when going down, as well as arm and core muscles. Landing strengthens bone density, which is built for life in childhood. **Social-Emotional:** turn-taking and risk-taking.



## Fireman's pole

**Physical:** coordination is supported when going down, as well as arm and core muscles. Landing strengthens bone density, which is built for life in early childhood. **Social-Emotional:** turn-taking and risk-taking.



## Climbing wall

**Physical:** develops children's cross coordination, eye-hand coordination, and muscle strength when climbing. **Social-Emotional:** two-sided climb invites cooperation.

# Penta Climber

PCM81331



Main posts with hot dip galvanized steel footing are available in different materials: Pressure impregnated pine wood posts. Pre-galvanized inside and outside with powder coated top finish steel posts. Lead free aluminum with color anodized top finish. Greenline TexMade posts of 95% post-consumer recycled PE and textile waste.




Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.



The steel surfaces are hot dip galvanised inside and outside with lead free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand.

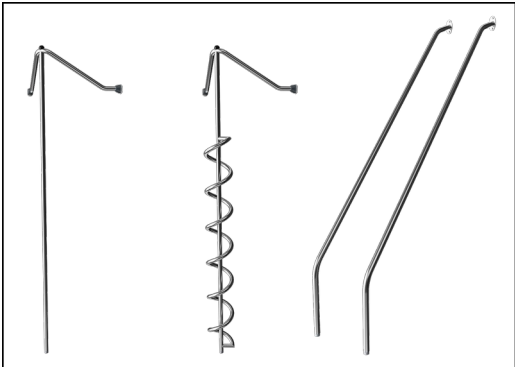

The stainless-steel activities are made of high-quality stainless steel. The steel is cleaned by a total pickling process after manufacturing to ensure a smooth and clean gliding surfaces.



KOMPAN GreenLine versions are designed with ultimate environmentally friendly materials with lowest possible CO2e emission factor. TexMade post, EcoCore™ panels of 95% post-consumer recycled waste and molded PP decks.

|                          |                          |
|--------------------------|--------------------------|
| Item no. PCM81331-0950   |                          |
| Installation Information |                          |
| Max. fall height         | 236 cm                   |
| Safety surfacing area    | 30.5 m²                  |
| Total installation time  | 10.4                     |
| Excavation volume        | 1.21 m³                  |
| Concrete volume          | 0.59 m³                  |
| Footing depth (standard) | 90 cm                    |
| Shipment weight          | 374 kg                   |
| Anchoring options        | Surface ✓<br>In-ground ✓ |
| Warranty Information     |                          |
| EcoCore HDPE             | Lifetime                 |
| Hot dip galvanised steel | Lifetime                 |
| Post                     | 10 years                 |
| Ropes & nets             | 10 years                 |
| Spare parts guaranteed   | 10 years                 |

| Elevated activities 0 | Accessible elevated activities | Accessible ground level activities | Accessible ground level play types |
|-----------------------|--------------------------------|------------------------------------|------------------------------------|
| Present               | 0                              | 1                                  | 1                                  |
| Required              | 0                              | 0                                  | 0                                  |

**CSA  
Z614**  
compliant

# Sustainability Data

PCM81331



| Cradle to Gate A1-A3 | Total CO <sub>2</sub> emission | CO <sub>2</sub> e/kg    | Recycled materials |
|----------------------|--------------------------------|-------------------------|--------------------|
|                      | kg CO <sub>2</sub> e           | kg CO <sub>2</sub> e/kg | %                  |
| PCM81331-0950        | 456.79                         | 1.78                    | 74.00              |
| PCM81331-0901        | 665.96                         | 3.08                    | 55.65              |

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

## Kompan A/S

C.F. Tietgens Boulevard 32C  
DK-5220 Odense SØ  
Denmark



## Verification of CO<sub>2</sub> calculation of: Freestanding play equipment



Data version no. 2023-10-05

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: GXY916012-3417.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

**Date: 30. October 2023 | Valid until: 30. October 2025**

**Verified by:**

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

**Publication date: 30. October 2023**

By Bureau Veritas HSE  
www.bureauveritas.dk  
+45 7731 1000





# Penta Climber

PCM81331

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

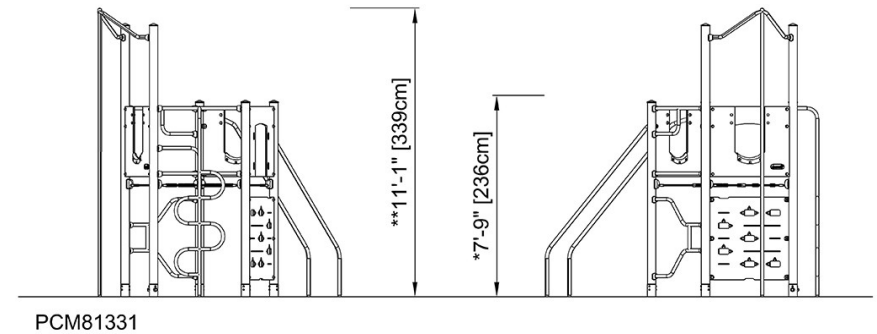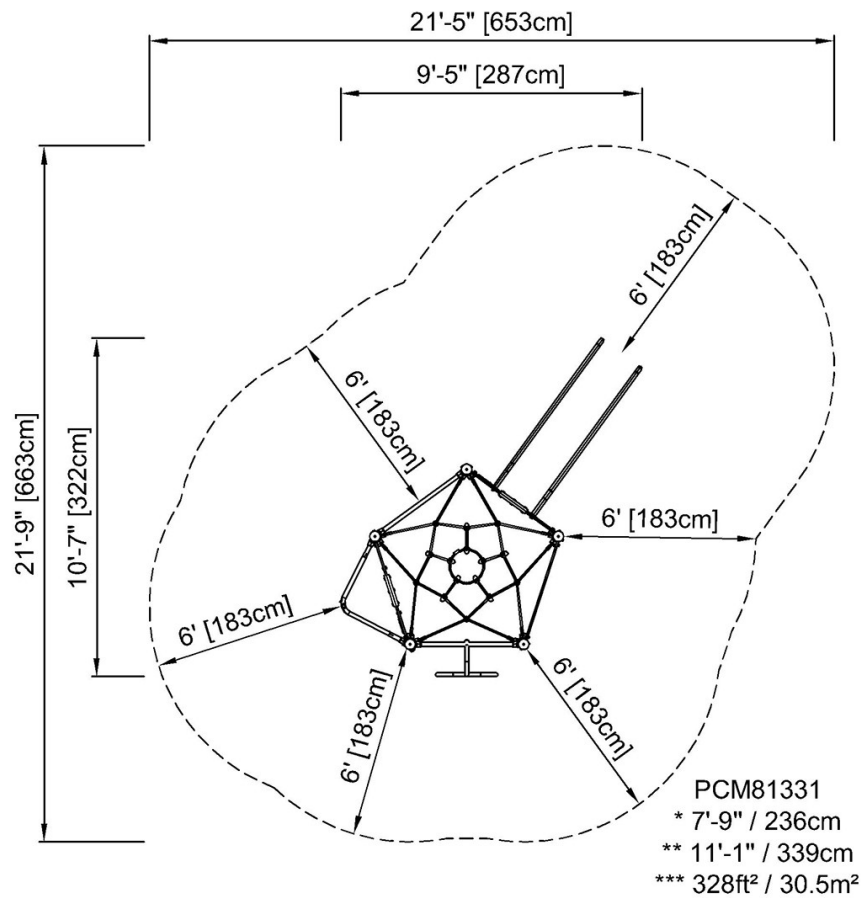

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)