FunPoint, Creator

PCT801



Item no. PCT801-0901		
General Product Information		
Dimensions LxWxH	199x321x185 cm	
Age group	6+	
Play capacity (users)	8	
Colour options		



The dense play invitation of the FunPoint, Creator attracts children again and again. The meeting point character is evident, with the dragon scale membrane offering a fun seat with flaps. The drawing wall offers repeated creative play sessions, having the children form letters and patterns with the two-colored rollers. This is a nice tactile event, that leaves a physical mark on the playground. The three moiree effect panels intrigue children, as their patterns change when you gaze with focus on seeing the bigger pattern. This makes children ask "How?" and try to explain the workings of patterns and the visual effect making. A cognitively stimulating process that trains children's logical thinking and argumentation skills.





FunPoint, Creator

PCT801





Dichroic panels

Physical: hanging and leaning on the ropesuspended panels train muscles, balance and cross-coordination. Social-Emotional: twisting the panels to create colorful shadows encourage turn-taking and cooperation skills. Cognitive: wondering about, understanding and explaining the reasons for the color occurrence support logical thinking skills.





Dragon scale Physical: the rubber scales add a fun feel to the seat and stimulates the sense of touch. Social-Emotional: great point for a break or meeting with friends.



Drawing wall

Physical: stimulate fine motor skills and add sensory stimulation when leaning on them. This soothes or invigorates depending on intensity. Social-Emotional: the cooperation and turn-taking in making patterns from both sides supports social-emotional skills such as cooperation. Creative: the two-colored rollers can be used from both sides, inspiring signalmaking and creativity.

FunPoint, Creator

PCT801

the print.





Turnable optic panels of two 7mm thick


polycarbonate plates with a distance of 40mm.

The inside graphic print consist of an inner

layer. Both PC panel and the water-based

image layer and outer transparent protection

lacquer are UV stabilized to prevent fading of




The two colored turnable rollers are made of

high quality UV stabilized and reinforced nylon

pipes in a welded frame. All steel parts are hot

dip galvanized.

(PA). The rollers are assembled on vertical steel

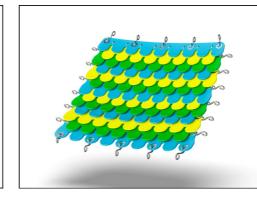

Colorful "Dragon Scale" made of friction-proof rubberized membrane of conveyor belt quality with excellent UV resistance. Embedded are two layers of galvanized steel wire armoring, making the membrane extremely durable.

Item no. PCT801-0901			
Installation Information			
Max. fall height	33	3 cm	
Safety surfacing area	24.	8 m²	
Total installation time	7.9		
Excavation volume	0.35 m³		
Concrete volume	0.00 m³		
Footing depth (standard)	90 cm		
Shipment weight	22	1 kg	
		in-ground 🗸	
Anchoring options	In-ground	~	
Anchoring options	In-ground Surface	• •	
Anchoring options Warranty Inform	Surface	>	
	Surface nation	✓ ✓	
Warranty Inform	Surface nation Life		
Warranty Inform EcoCore HDPE Galvanised/painted	Surface nation Life 10 y	time	
Warranty Inform EcoCore HDPE Galvanised/painted metal	Surface nation Life 10 y 2 y	time ears	



Powder coated post are made of high quality pre galvanized steel with powder coated top finish. Post tops are closed with caps of UV stabilized nylon (PA6).



Sustainability Data

Cradle to Gate A1-A3


PCT801-0901

PCT801



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark







Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Play systems" represented by item no.: PCM200321-0950.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

Somo

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Total CO2

emission

kg CO₂e

664.03

CO2e/kg

kg CO₂e/kg


4.19

Recycled

materials

%

40.22




PCT801





199 3 15.4m² *33cm 620 321 PCT801 150 *33cm 150 **185cm 9.4m² ***24.8m² *0cm

498

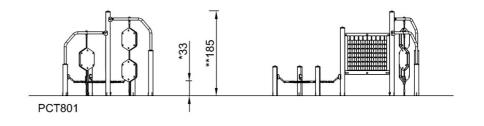

* Max fall height | ** Total height

Click to see TOP VIEW