CRP810201





Item no. CRP810201-0903

General Product Information

Dimensions LxWxH 24'7"x24'3"x8'4"

Age group 2 - 5

Play capacity (users) 42

Color options



Marvellous Mini Dome repeatedly amazes children with its richness in play, variation, and detail. The Dome can be entered from all over: bouncy membranes, nets, climbing ropes, and stairs take the toddlers to the top membrane circle. This bouncing viewpoint invites friends to meet. Under it, a cozy den is created with varied climb or peep-through membranes

inviting play classics such as peek-a-boo. The panels and hammock around the central nets allow for dramatic play and exploration with sensory details. The slide is a play magnet and completes the play offerings that train motor skills such as balance, coordination, and proprioception. These are fundamental in moving the body confidently and securely.

The varied movements also instill an understanding of space, shapes, and measures, which is fundamental to understanding mathematics. The Mini Dome offers great play capacity, so children learn turn-taking skills and make friends through play.



CRP810201









Inclined net with membrane

Physical: the inclined net supports the upward climbing movement of the body, which stimulates cross-body coordination and muscle strength. The bouncy membrane develops the sense of balance when children iump, stand or sit here. Social-Emotional: the big net allows for more children to be active together, seated or lying.











Double slide

Physical: sliding develops spatial awareness and a sense of balance. Furthermore, the core muscles are trained when sitting upright going down. Social-Emotional: invites socializing, supports parent-child and peer-to-peer play. Cognitive: young children train their understanding of space, speed and distances when sliding down quickly.





Cognitive: understanding of individuality and self expression. Stimulates dramatic play and so language and communication development.



place curtains.

Window with curtains



Physical: tactile stimulation supports sensory

skills, when children explore characteristics of

supporting taking turns and cooperation skills.

Cognitive: understanding object permanence

when playing, e.g. peek-a-boo. Dramatic play

Creative: leaving a mark, deciding how to

the materials. Social-Emotional: social

interaction between inside and outside,

support, encouraging language skills.











Cognitive: supports understanding of measurement.






Physical: the sense of balance and space is











Top circular membrane

supported when entering the slightly bouncing membrame. This trains the understanding of time, space and measures important in moving the body in securely. Social-Emotional: children develop courage when climbing and being up high. This positively affects self-confidence. The top membrane provides a great place to be together with friends.









CRP810201





Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco-friendly material, which is not only recyclable after use but also consists of material produced from +95% recycled postconsumer material from food packing waste.



The steel arches are hot dip galvanized inside and outside with lead free zinc. The galvanization has excellent corrosion resistance in outside environments and requires low maintenance.



The slides can be chosen in six different colors and two materials: Molded PE slides made with 33% post-consumer materials or full stainless steel in a one-piece design for more vandalismproof solutions.



Max. fall height 4'2" Safety surfacing area 921ft² Total installation time 36.6 Excavation volume 21.29yd3 Concrete volume 14.95yd3 Footing depth (standard) 2'11' Shipment weight 2066lbs Anchoring options In-ground Surface **Warranty Information**

Item no. CRP810201-0903 Installation Information

Corocord Rope 10 Years EcoCore HDPE Lifetime Hollow PE Parts 10 Years Hot dip galvanized steel Lifetime Spare Parts Availability 10 Years



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made of +95% Post-consumer materials and is inductively melted onto each strand to obtain excellent wear and tear resistance.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.



The Corocord Smart Clamps are carefully designed to ensure superior flexibility in highquality aluminum material. The smart clamps are attached around the post with four steel bolts. Unused attachment points are closed with PA caps.

Elevated activities 2	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	2	5	3
Required	1	1	1

ASTM F1487 compliant

Sustainability Data

CRP810201



Cradle to Gate A1-A3	Total CO ₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
CRP810201-0903	2,257.61	3.03	48.70

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))



Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: $\mathrm{COR314011}$ -1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

Some

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO_2 calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000





CRP810201



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

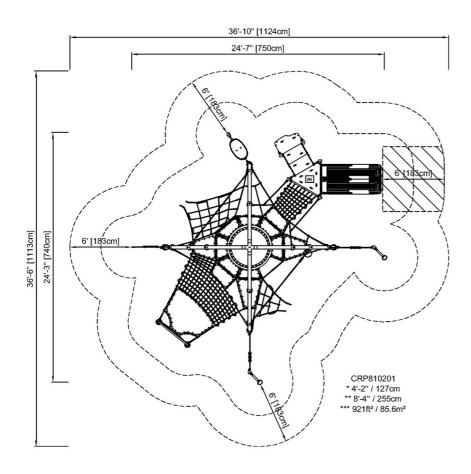



Click to see TOP VIEW

Click to see SIDE VIEW