PCM212421





Item no. PCM212421-0901

General Product Information

Dimensions LxWxH 958x1156x440 cm

Age group 4+

Play capacity (users) 33

Colour options



The Castle's Outer Gate is a fabulous play structure. The rich variety of challenges engage children and stimulate hours of play. The inclined climbing entrances support cross-coordination and intellectual development. The two towers and the curved bridge double as perfect lookout spots for adventurers. The double slide adds thrill and develops balance

as children make their way back to the ground solo or with a friend. On the other side of the Castle's Outer Gate, the track ride adds thrill and trains spatial awareness, a fundamental key to children's understanding of the world around them. Spaces for dramatic and social play are plentiful under the Castle's platforms, with special surprises such as the treasure

chest or slime door, which inspire dramatic play and stimulate language development.



PCM212421







### Cannon

Cognitive: the cannon set a tangible theme and thus spur dramatic play. Dramatic play supports language and communication skills.









### Track ride

Physical: supports bone density, motor skills like agility, balance and coordination. Trains arm and core muscles. Social-Emotional: cooperation, consideration, turn-taking, risktaking, self-confidence.



Double slide



Physical: develops spatial awareness, sense

sitting upright going down. Social-Emotional:

invites socialising, supports parent-child and peer-to-peer play. Cognitive: young children


train their understanding of space, speed and

distances when sliding down.

of balance and trains core muscles when













#### Treasure box

Cognitive: object permanence: hiding objects and finding them again. Spurs exploration and dramatic play, stimulating conversations.



Slime door

permanence.



Physical: tactile stimulation from moving the

body through the rubber slime door. Social-

Emotional: stimulates turn-taking. Cognitive:

slime door encourages hide-and-seek, peek a


boo games . Trains understanding of object













PCM212421



10 years



Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco-friendly material, which is not only recyclable after use but also consists of a core produced from 100% recycled material.



Main posts with hot-dip galvanised steel footing are available in different materials including: pressure impregnated pinewood posts, pregalvanised posts that are powder-coated or a lead-free aluminium option with an anodised colour top finish.



All decks are supported by unique designed low-carbon aluminum profiles with multiple attachment options. The grey colored molded decks are made of 75% post-consumer waste PP material with a non-skid pattern and texture surface.



Installation Information Max. fall height 173 cm Safety surfacing area 69.0 m<sup>2</sup> Total installation time 39.8 hours Excavation volume 2.33 m<sup>3</sup> Concrete volume 0.93 m<sup>3</sup> Footing depth (standard) 90 cm Shipment weight 1,418 kg Anchoring options In-ground Surface **Warranty Information** FcoCore HDPF Lifetime Post 10 years PP Decks 10 years Ropes & Nets 10 years

Item no. PCM212421-0901



The slides can be chosen in different materials and colours. Options include straight, or curved moulded PE slides in yellow or grey colour or a full stainless steel option which is a more vandalism proof solutions.



The hang-on puller is designed with a welded steel core and covered with low-density PE housing. The two hot-dip galvanised steel handles are angled to provide the best possible ergonomic while gliding. The wheels of the puller are made of low noise TPU and installed with sealed ball bearings.



Nets and ropes are made of UV-stabilised PA with inner steel cable reinforcement. The rope is induction treated to create a strong connection between steel and rope, which leads to durable weather resistance.



Spare Parts Guarantee

3 / 06/28/2025 Data is subject to change without prior notice.

# **Sustainability Data**

PCM212421





Cradle to Gate A1-A3	Total CO₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
PCM212421-0901	2,163.69	1.93	69.95


The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

### Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



### Verification of CO<sub>2</sub> calculation of: Themed play systems

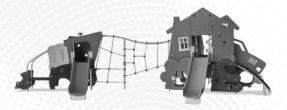

Data version no. 2023-10-05

The  $\mathrm{CO}_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Themed play systems" represented by item no.: MSC641100-3717P.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

miss

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of  ${\rm CO_2}$  calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000





PCM212421



\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

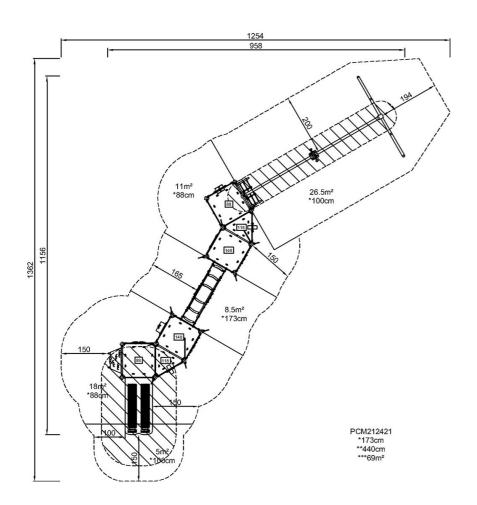



Click to see TOP VIEW

Click to see SIDE VIEW