## **Balance Beam**


FPW215





In addition to running, jumping, climbing, crawling, balancing should always be a part of a challenging obstacle course. The balance beam is divided into three sections with increasing degrees of difficulty. The real dare devils can make the exercises even more difficult by balancing backwards. The surface of the Balance Beam is made from Ekogrip®

panels with a top-layer of thermoplastic rubber, this has a non-skid effect for comfortable and safe training at all weather circumstances.

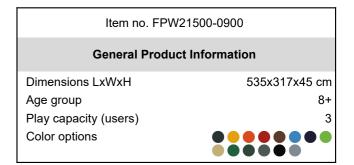



## **Balance Beam**

Post are made of Ø101.6 x 2mm, pre-

great protection to all conditions.

galvanized carbon steel and powder coated, a

FPW215



The connectors are made of die-cast aluminium, specially alloyed for the outdoor environments and heavy usage. The screws attaching the connectors are stainless steel and protected by zinc washers.



Bars intended as grips during exercises are made of hot-dip galvanised steel ø38mm. A great diameter to support the wrist when doing dips or handstands.

Item no. FPW21500-0900 **Installation Information** Max. fall height 40 cm Safety surfacing area 27.8 m<sup>2</sup> Total installation time 3.7 hours Excavation volume 0.11 m<sup>3</sup> 0.06 m<sup>3</sup> Concrete volume 90 cm Footing depth (standard) 108 kg Shipment weight Anchoring options In-ground Surface **Warranty Information** Connectors 10 years EcoCore HDPE Lifetime Hot dip galvanised steel Lifetime Post 10 years Spare parts guaranteed 10 years



**Sustainability Data** 

**FPW215** 





C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



## Verification of CO<sub>2</sub> calculation of: Fitness



Data version no. 2023-10-05

The  $\mathrm{CO}_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Fitness" represented by item no.: FAZ10100-0900.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

miss

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of  ${\rm CO_2}$  calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000





Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
FPW21500-0900	153.27	2.25	53.95

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))


## **Balance Beam**






\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

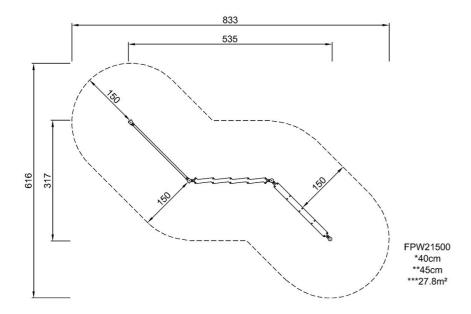



Click to see TOP VIEW

Click to see SIDE VIEW