

COR10320



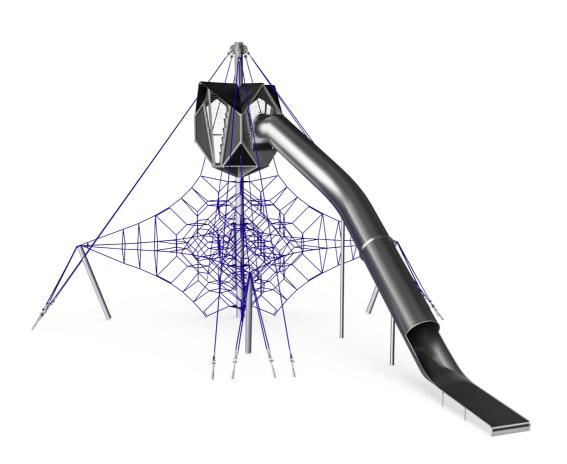


Item no. COR103201-1002				
General Product Information				
Dimensions LxWxH	1386x887x730 cm			
Age group	5+			
Play capacity (users)	41			
Colour options				



This intriguing play space will immediately attract children to play and explore the many physical challenges it has to offer. The carefully designed Octa Net challenges children to explore the space by using their muscles for a climb to the top, and the reward of the Sky cabin and the thrilling slide down, to start the adventure over again. The repeated climbing

and sliding will strengthen physical endurance, as well as aerobic and cardio capacity. The variety of routes to take up and around the Octa Net helps children to develop their logical thinking skills in conjunction with their physical skills. The large capacity climbing net provides opportunities for children to socialize and strengthen relationships through play. The sky

cabin provides a place for rest as well as social interaction that will inspire hours of joyful physical activity.



COR10320










Highest rungs

Physical: spatial awareness is supported, arm muscles when holding tight. Social-Emotional: children develop courage, selfconfidence, consideration and turn-taking, all important life skills.

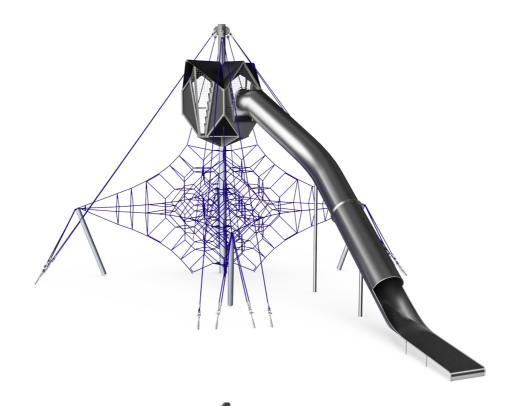







Sturdy, middle rung

Physical: the bounce develops the sense of balance, which is important for skills such as sitting still. The upper body muscles are trained when hanging from the arms. Bone density is developed when jumping down. Social-Emotional: many children can stand or sit on the rung together, cooperating and feeling the movements of the other children moving. This develops consideration and cooperation.



Skv cabin

Physical: being up high develops spatial awareness and sense of balance. Social-**Emotional:** a destination and meeting point up high adds social interaction as well as thrill and great views.



Big meshes

together, sharing.



Physical: the big meshes allow for climbing

and crawling, supporting proprioception, cross

coordination and spatial awareness. Climbing

Emotional: allow more children being seated

here takes muscle strength, pushing and

pulling arms to get upwards. Social-





Long tube slide

Physical: sliding develops spatial awareness and the sense of balance. Social-Emotional: the height ensures extra speed and thrill. Empathy stimulated by turn-taking and consideration of others. Feeling of security when stopping on extra long slide mouth.



Sturdy, lower rungs



Physical: the stiff bounce of the lower rung

strengthens bone density when jumping

supports balance and coordination as well as

down. Hanging from the arms trains back and

upper body muscles, supporting good posture.


These are a growing concern for children due

to sedentary lifestyles. Social-Emotional:

great meeting point allowing socializing.

















COR10320



225 cm

50.0

121.4 m²

17.76 m³

10.70 m³

100 cm

3,551 kg

10 years

In-ground



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand. The ropes are highly wear-and vandalism-resistant and can be replaced at site if needed.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.



The aluminium swages of the net are double conical with rounded ends and are as small as safety allows. The overall net design aims at keeping metal parts within the net to an absolute minimum, both in size and number, in order to provide the best possible rope climbing experience.



Warranty Information Aluminium clamps 10 years Corocord rope 10 years Membrane 2 years 10 years S-Clamps

Item no. COR103201-1002 **Installation Information**

Max. fall height

Safety surfacing area

Total installation time

Footing depth (standard)

Spare parts guaranteed

Excavation volume


Concrete volume

Shipment weight

Anchoring options



Corocord membranes consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armouring made of woven polyester. The armouring and the two surface layers result in a total thickness of 7.5 mm.



The stainless steel components are made of high quality stainless steel in compliance with global playground standards. The steel is glass blasted after manufacturing to ensure a smooth gliding surface.



Through KOMPAN Variant Team, you can choose between additional 7 rope colours and customize your solution. The assortment is a wide span of colours ranking from elegant and expressive black or natural and toned-down hemp colour, to a range of attractive and eyecatching signal colours.



Sustainability Data

COR10320





Cradle to Gate A1-A3	Total CO₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
COR103201-1002	8,455.19	2.88	51.45

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: $\mathrm{COR314011}$ -1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

misiE

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO_2 calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023


By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000






* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

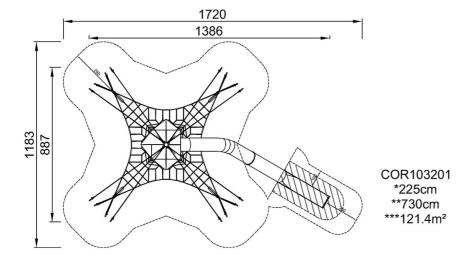

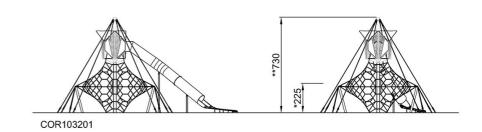

Click to see SIDE VIEW