


# Large Spacenet


CRP303001


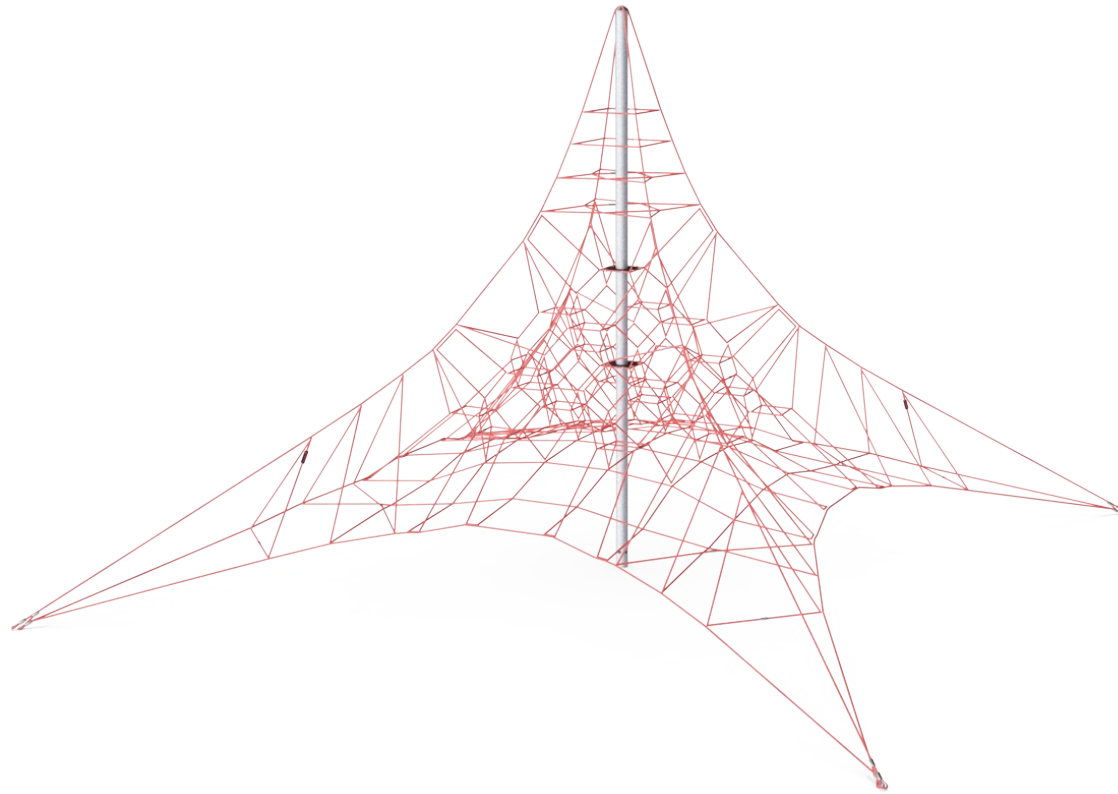


Large Spacenet 은 탄력 있고 안팎이 뚫려 있는 놀이 구조물로, 아이들이 꼭대기까지 올라가도록 유도합니다. 정상에 도달했을 때의 성취감은 대단하며, 아이들은 이를 반복하며 매번 새로운 경로를 탐색하는 즐거움을 느낍니다.

Large Spacenet 은 운동 능력의 ABC, 즉 민첩성 (Agility), 균형감 (Balance), 협응력

(Coordination) 을 길러줍니다. 또한, 팔로 당기고 밀며, 다리로 지탱하고, 코어가 안정성을 유지하는 등 주요 근육군이 활발하게 사용됩니다.

Item no.	
General Product Information	
Dimensions LxWxH	1132x1132x751 cm
Age group	5+
Play capacity (users)	56
Color options	

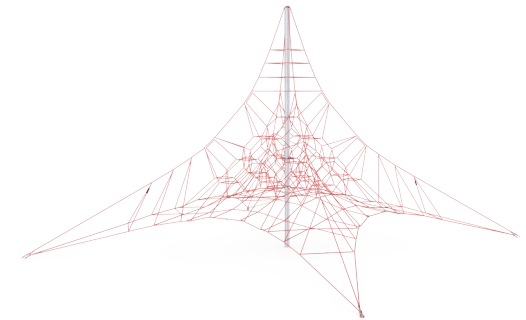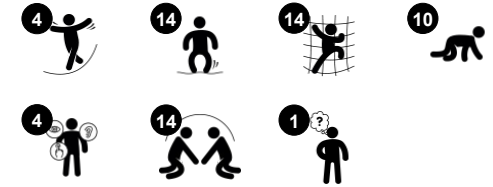

# Large Spacenet

CRP303001




Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand. The ropes are highly wear- and vandalism-resistant and can be replaced at site if needed.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope structures.



Corocord membranes consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armouring made of woven polyester. The armouring and the two surface layers result in a total thickness of 7.5 mm.

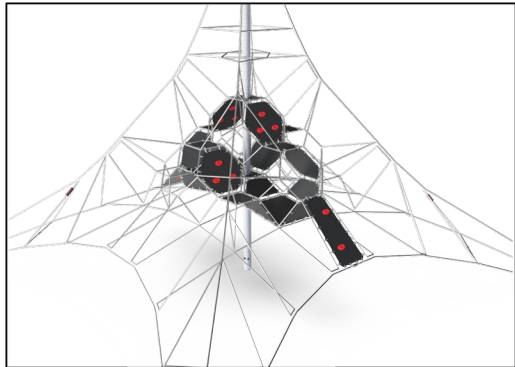

With six pre-defined color concepts and numerous add-in and add-on options, you can create bespoke Spacenets™ structures. A new platform enables interlinking with our other popular product categories, such as MOMENTS™, ELEMENTS™ and Robinia.



In the centre of the net is the mast, made of high quality seamless steel. The structure of the mast as an oscillating support is statically favourable and equalizes the oscillations in the net. The masts are hot dip galvanised as standard, with the design option of additional powder coating.




For installations using rubber surfacing the turnbuckle protectors are to be ordered separately.

Item no.	
Installation Information	
Max. fall height	221 cm
Safety surfacing area	163.5 m²
Total installation time	
Excavation volume	
Concrete volume	
Footing depth (standard)	
Shipment weight	
Anchoring options	In-ground ✓
Warranty Information	
Corocord rope	10 years
Membrane	2 years
S-Clamps	10 years
Spare parts guaranteed	10 years
Steel post HDG	Lifetime

**EN**  
**1176**  
compliant

# Sustainability Data

CRP303001

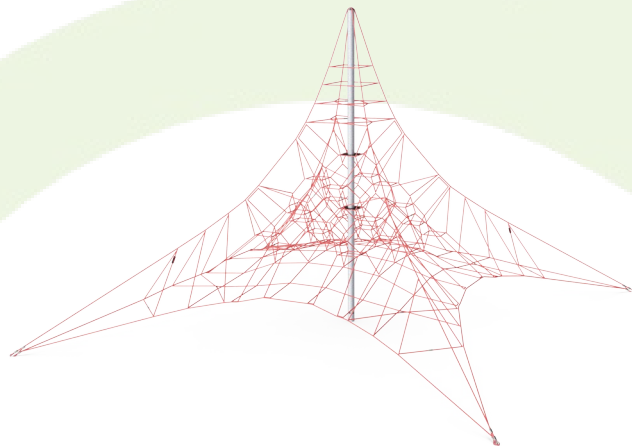


Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO <sub>2</sub> e/kg	Recycled materials
	kg CO <sub>2</sub> e	kg CO <sub>2</sub> e/kg	%

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Kompan A/S**  
C.F. Tietgens Boulevard 32C  
DK-5220 Odense SØ  
Denmark



## Verification of CO<sub>2</sub> calculation of: Corocord



Data version no. 2023-10-05

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

**Date: 30. October 2023 | Valid until: 30. October 2025**  
**Verified by:**

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.


**Publication date: 30. October 2023**

**By Bureau Veritas HSE**  
www.bureauveritas.dk  
+45 7731 1000




CRP303001

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

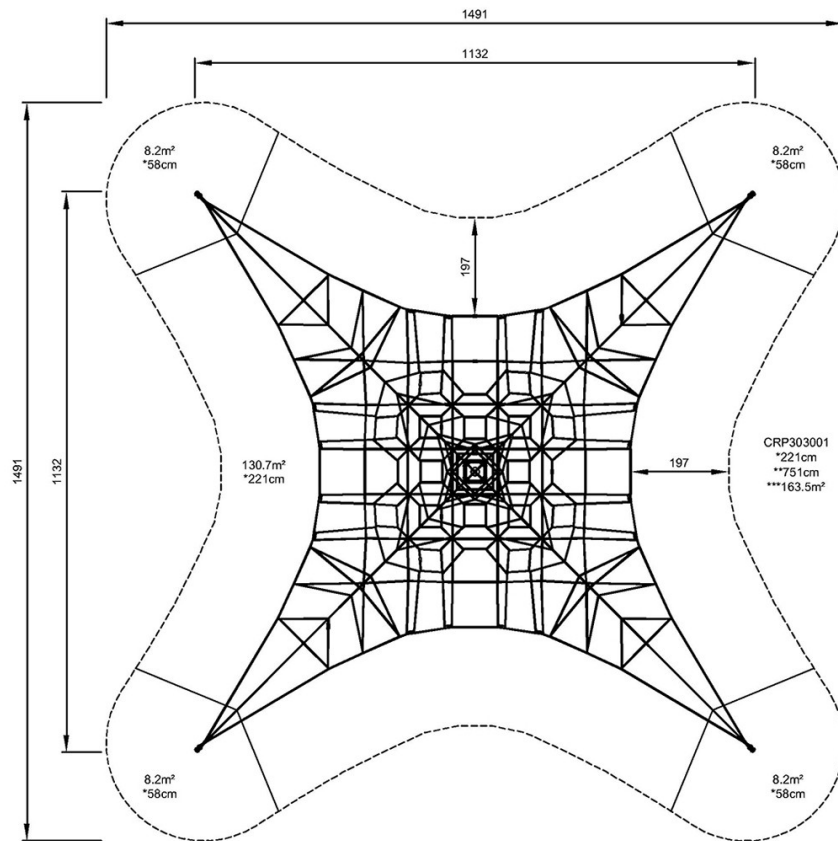

[Click to see TOP VIEW](#)

\* Max fall height | \*\* Total height

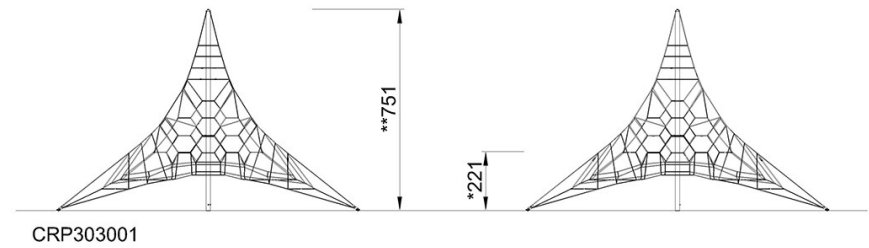

[Click to see SIDE VIEW](#)