


Swing H:2.5m, Std. Seats

KSW90014



Item no. KSW90014-0909	
General Product Information	
Dimensions LxWxH	354x240x274 cm
Age group	2+
Play capacity (users)	2
Colour options	

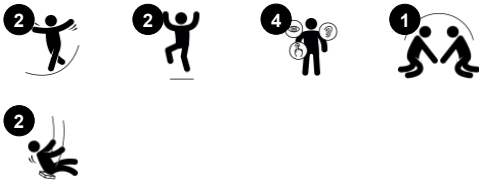

Of all the play activities, swinging is a favourite which done individually and together with their peers. This swing set supports the joy of play and features two similar swing seats which are shaped with a slight curve in the middle, to facilitate the secure seat position of a wide age span. Swinging is great fun, but it also develops children's agility, balance and

coordination skills and teaches them about spatial awareness. These motor skills are crucial to being able to judge distances and navigate, traffic safely. Apart from the motor skills training, swinging also trains the arm, leg and core muscles and increases bone density as children jump on and off. All of KOMPAN's swings can be configured to adapt to the

individual design and site considerations.



Swing H:2.5m, Std. Seats

KSW90014



Two single swing seats

Physical: balance, coordination and spatial awareness are trained when swinging. All necessary when judging distances and managing traffic safely. **Social-Emotional:** parallel play invites cooperation and consideration. **Cognitive:** 'Cause and effect' understanding, managing rhythm and thinking skills for younger children when swinging. Rules games for bigger children.



Swing H:2.5m, Std. Seats

KSW90014



The A-Frame is available with three post material options: Hot dip galvanized $\varnothing 76\text{mm}$ steel, impregnated pine wood $95 \times 95\text{mm}$ with hot dip galvanized steel footings or $\varnothing 120\text{mm}$ TexMade™ posts.



The A-Frame is designed with hot dip galvanised $\varnothing 100\text{mm}$ crossbar with large steel end plates for strong fixation to the posts. The crossbeam is prepared for all KOMPAN hanger options.



The swing hangers are made of high-quality UV-stabilised nylon (PA6) housing with integrated lifetime sealed ball bearings. The adjustable chains are fixed by a stainless steel hook with a theft-proof snake-eye bolt which is manufactured within an anti-twist house. All seats are fixed with two chains and are available with either standard or anti-wrap suspension.



The standard seats of KOMPAN swings are engineered for maximum safety and durability. The seat two component seat with a PP inner core and outside rubber is produced in one operation. The seats are available with swing chains of either hot-dip galvanised steel or stainless steel for all swings heights.



KOMPAN's bird's nest seats have been designed to be light in weight and compliant with global safety standards. The soft, shock-absorbent bumpers has a non-slip surface, making the swing seat extremely user friendly. You can choose between a rope version with reinforced PA rope or a moulded PE version.



KOMPAN GreenLine versions are designed with ultimate environmentally friendly materials with lowest possible CO2e emission factor. TexMade post, EcoCore™ panels of 95% post-consumer recycled waste and molded PP decks.

Item no. KSW90014-0909

Installation Information

Max. fall height	145 cm
Safety surfacing area	23.3 m ²
Total installation time	4.5 hours
Excavation volume	1.66 m ³
Concrete volume	0.00 m ³
Footing depth (standard)	85 cm
Shipment weight	140 kg
Anchoring options	Surface ✓ In-ground ✓

Warranty Information

Chains	10 years
Galvanised Steel	Lifetime
Spare Parts Guarantee	10 years
Swing Hangers	5 years
Swing Seat	10 years



Sustainability Data

KSW90014



Cradle to Gate A1-A3	Total CO ₂ emission	CO ₂ e/kg	Recycled materials
	kg CO ₂ e	kg CO ₂ e/kg	%
KSW90014-0950	234.82	1.01	83.57
KSW90014-0909	381.19	2.78	47.72

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S

C.F. Tietgens Boulevard 32C
DK-5220 Odense SØ
Denmark



Verification of CO₂ calculation of: Freestanding play equipment



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: KSW92011-0910.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000




Swing H:2.5m, Std. Seats

KSW90014


* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

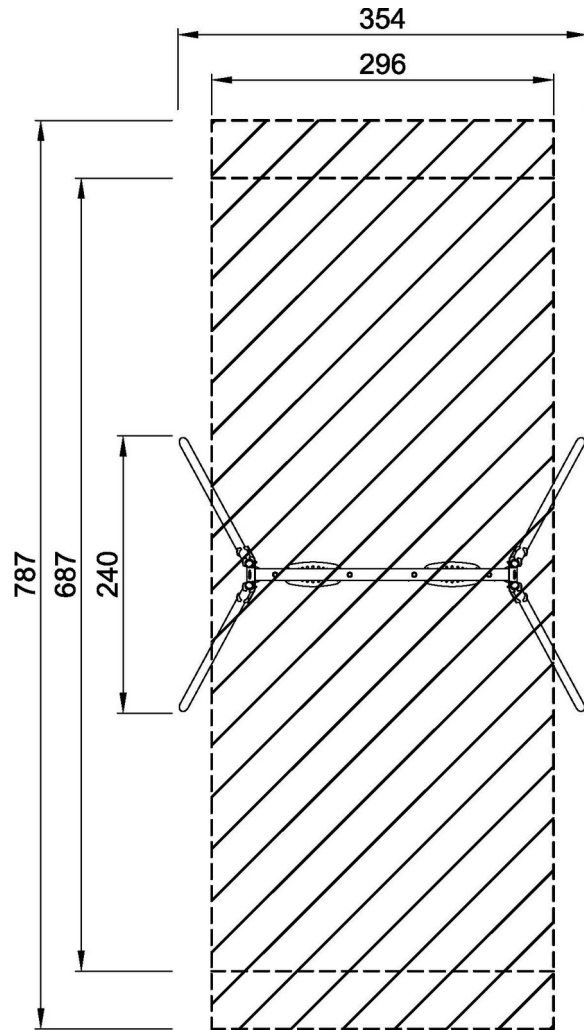

KSW90014
*145cm
**274cm
***23.3m²

[Click to see TOP VIEW](#)

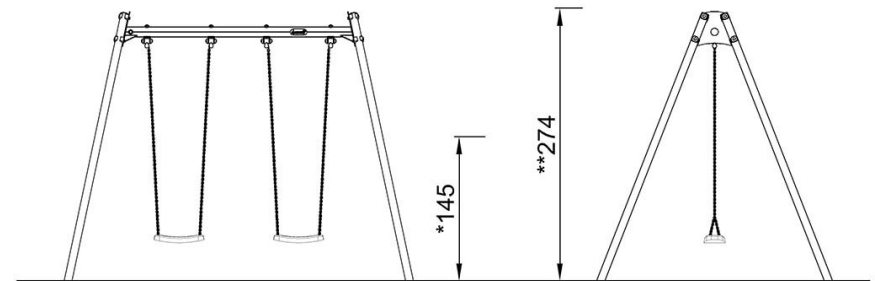

KSW90014

[Click to see SIDE VIEW](#)