

# Tunnel Bridge



COR65090

**KOMPAN**  
Let's play

产品编号 COR650901-1108

## 产品信息概览



长宽高尺寸	923x131x275 cm
适用年龄段	5+
容纳人数	27
颜色选择	

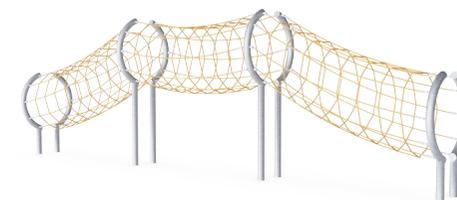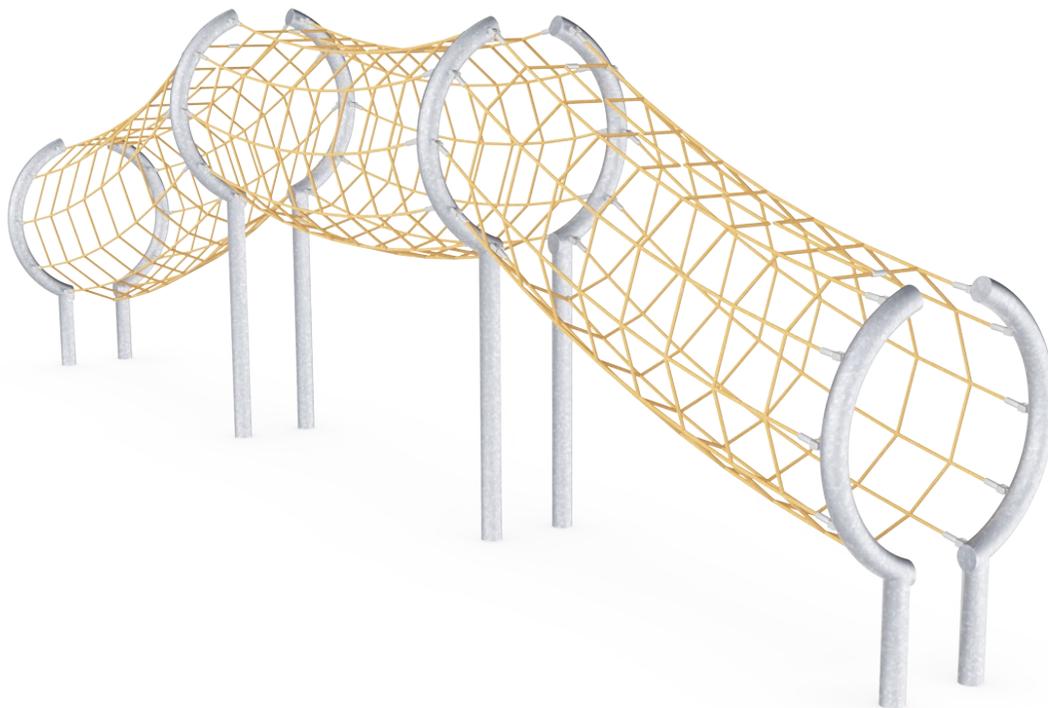

海底隧道是一个独立的圆柱形结构。孩子们可以在桥上行走，或者攀爬顶部的网绳通过桥梁。弯曲的网绳结构也可用作吊床，在上面放松休息。这款设施既可以用作独立的游乐设备，也可以用作通往时空网或独立滑梯的通道。


# Tunnel Bridge

COR65090

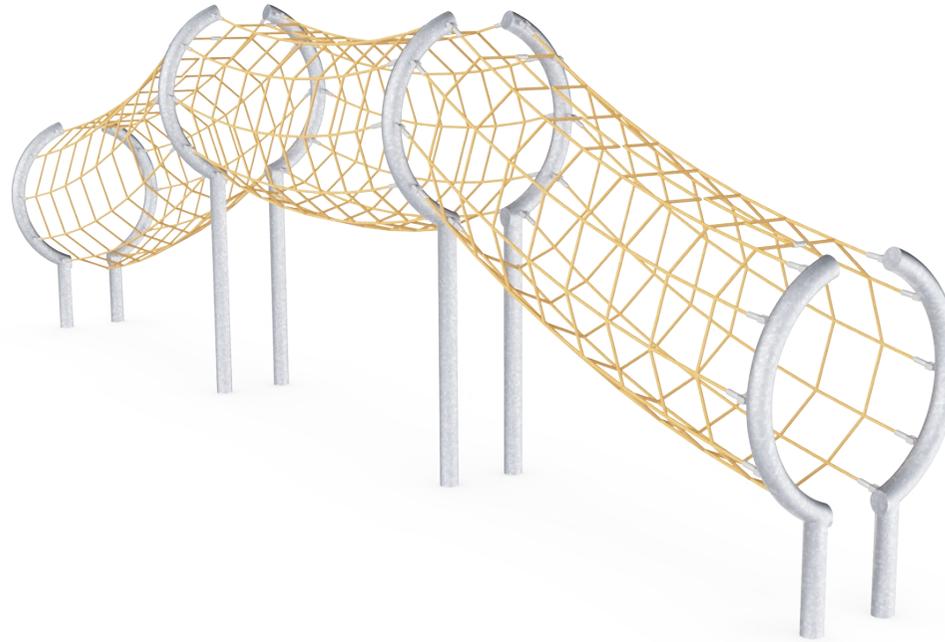

## Height

**社交情感** : children develop courage and self-regulation when being up high. This positively affects self-confidence.



## Tunnel bridge

**身体素质** : arm, leg and core muscles are developed when climbing up and through. Trains balance and spatial awareness which helps in judging the body in space. **社交情感** : 经过他人时的合作和轮流意识。



## Transparency

**社交情感** : 透明的设计使得整个过程中合作和交流成为可能，这些都是孩子们需要学习的重要生活技能。

# Tunnel Bridge

COR65090



直径大于等于 19mm 的 Corocord 绳索是特殊的“大力神”型镀锌六股钢丝。每根丝束都用 PES 纱紧密包裹，然后将其融化到每根独立的丝束上。这些绳索具有很高的耐磨性和防破坏性，可以根据需要在现场更换。



Corocord“S”扣在 Corocord 产品中作为通用连接。用特殊的液压机将带有圆形边缘的 8mm 不锈钢条压在绳索周围，使其成为理想的连接部件。其安全、耐用且防破坏，适用于攀爬网游戏结构中的典型游戏运动。



钢结构的内部和外部均使用无铅热浸镀锌。镀锌在外部环境中具有出色的耐腐蚀性，并且维护成本低。



通过 KOMPAN Variant 团队，您可以在其他 7 种绳索颜色之间进行选择并自定义解决方案。各种各样的颜色，从优雅、富于表现力的黑色，到自然而柔和的麻色，再到一系列引人入胜的醒目色。

产品编号 COR650901-1108

## 安装信息

最大跌落高度	275 cm
安全面积	54.8 m <sup>2</sup>
安装总时长	10.6
开挖量	7.92 m <sup>3</sup>
混凝土使用量	5.04 m <sup>3</sup>
标准入地深度	110 cm
运输重量	645 kg
固定选项	入地 ✓


## 质保信息

Corocord 绳索	10 年
镀锌钢结构	终身质保
S 扣	10 年
承保零部件	10 年



# Sustainability Data

COR65090

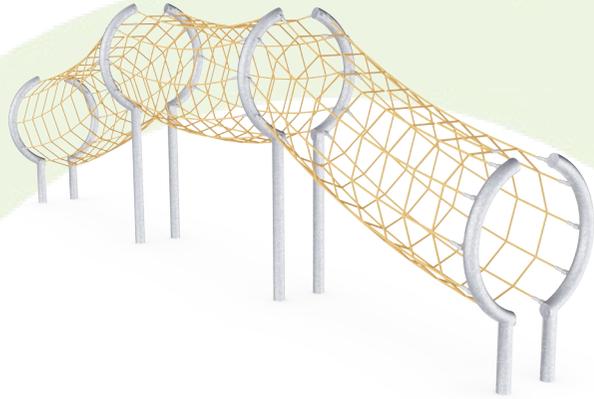

## 从原材料到成品

CO<sub>2</sub> 排放总量

kg CO<sub>2</sub>e

CO<sub>2</sub> 排放量 / 千克

kg CO<sub>2</sub>e/kg

回收的原料

%

**COR650901-1108**

1,772.46

2.86

51.66

这些因素采用的总体框架为环保产品声明 (EPD), 该声明可量化“产品生命周期的环保信息, 并对相同功能的产品进行对比” (ISO, 2006)。在遵循该框架的同时, 对从原材料到制造的整个产品阶段 (A1-A3) 应用生命周期评估法。

### Kompan A/S

C.F. Tietgens Boulevard 32C  
DK-5220 Odense SØ  
Denmark



### Verification of CO<sub>2</sub> calculation of: Corocord



Data version no. 2023-10-05

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

**Date: 30. October 2023 | Valid until: 30. October 2025**

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

**Publication date: 30. October 2023**

By Bureau Veritas HSE  
www.bureauveritas.dk  
+45 7731 1000




# Tunnel Bridge


COR65090

最大跌落高度 | 总高度 | 安全区域

最大跌落高度 | 总高度

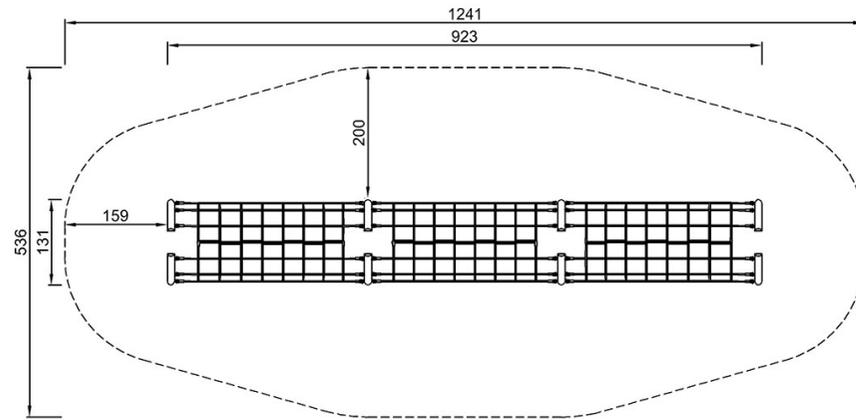

COR650901  
\*275cm  
\*\*275cm  
\*\*54.8m<sup>2</sup>

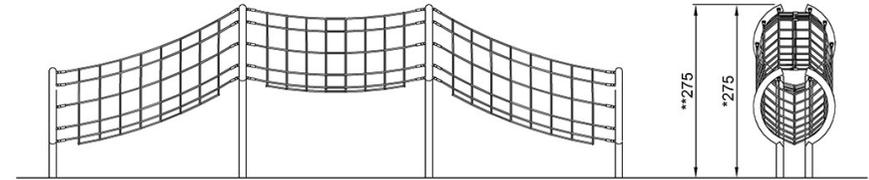

COR650901

[点击查看俯视图](#)

[点击查看侧面图](#)