COR10120







The Small Spacenet & Bouncing Membrane is a bouncy, transparent play structure that encourages children to climb to the top. The feeling of achievement when having climbed to the top is exciting, trying different routes each time. Climbing or swaying in the bouncy net with pendulum seats is challenging and immensely fun. The Small Spacenet trains the

motor skills' ABC: Agility, Balance and Coordination. Major muscle groups are used when children climb, including; arms push and pull, legs push and the core provides stability. The rope membranes invites breaks and rest points where children's social-emotional skills are developed.

Item no. COR101201-1104			
General Product Information			
Dimensions LxWxH	1095x900x580 cm		
Age group	5+		
Play capacity (users)	44		
Colour options			

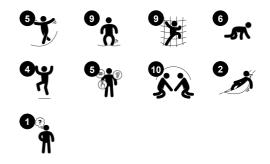




COR10120





### **Bouncy net meshes**

Physical: agility, balance and coordination as well as spatial awareness are supported when bouncing, climbing and sitting in the net. Social-Emotional: the bouncing, swaying net appeals to empathy and cooperation. Cognitive: physical memory, logical thinking, concentration.

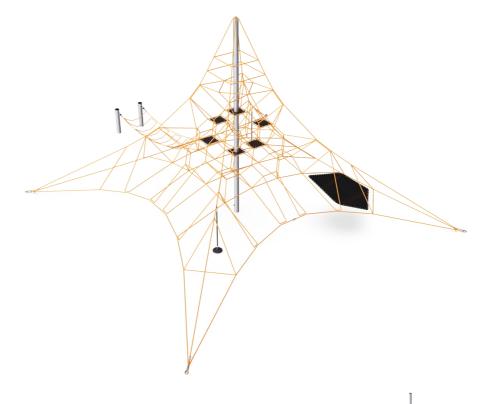



#### Membrane

Physical: the bouncy membrane develops the sense of balance when the child stands, steps or sits here. A faster way up, due to the extra support of the membrane. Social-Emotional: a meeting point for retreat from the rope landscape.



#### Waggle bridge

Physical: sense of balance and training of cross coordination. Important for other skills such as being able to sit still. Social-Emotional: turn-taking and helping others when climbing up.



important life skills.



Physical: spatial awareness is supported,

Emotional: children develop courage, self-

arm muscles when holding tight. Social-





#### **Highest rungs**

Physical: the stiff bounce of the lower rung strengthens bone density when jumping confidence, consideration and turn-taking, all allowing socialising.














Physical: swaying supports sense of balance & develops core and upper muscles Social-Emotional: socialising and turn-taking when deciding who should sit here.



Physical: the slightly swaying mast stimulates supports balance and coordination as well as children's muscles and motor skills when they down. Social-Emotional: great meeting point







COR10120





Corocord ropes with 19mm+ diameter are known as a 'Hercules' rope type which is formed from galvanised six-stranded steel wires. Each strand is tightly wrapped with PES yarn, which is melted onto each individual strand. Ropes are highly wear-and vandalism-resistant and can be easily replaced on-site if needed.



Designed to allow the typical function of rope play structures to move Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector. Our clamps are safe, durable and vandalism-proof.



Safety is at the forefront of our designer's minds. That's why our spacenets' main bearing ropes are equipped with an additional safety feature. Should the main connections point fail, we have included an additional safety rope which prevents the structure from collapsing.



Item no. COR101201-1104

#### **Installation Information** Max. fall height 185 cm Safety surfacing area 126.6 m<sup>2</sup> Total installation time 19.4 Excavation volume 9.68 m<sup>3</sup> Concrete volume 6.16 m<sup>3</sup> Footing depth (standard) 110 cm Shipment weight 781 kg Anchoring options In-ground

Warranty Information	า
Corocord (Hercules) Rope	10 years
Membrane	2 years
S-Clamps	10 years
Spare Parts Guarantee	10 years
Steel post HDG	Lifetime



Corocord membranes consist of friction-proof rubberised material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armouring made of woven polyester. The armouring and the two surface layers result in a total thickness of 7.5 mm.



In the centre of the net is the mast which is made of high-quality seamless steel and creates an oscillating support structure which is statically favourable and equalises the oscillations in the net. The masts are hot-dip galvanised as standard, with the design option of additional powder coating.




The huge spacenet structures are secured to the foundation with a system of three turnbuckles. Horizontal and vertical edge cables are fixed to individual turnbuckels, which then connect to individual steel anchors. This system ensures that each edge cable can be tensioned separately and increases structural safety by way of independent anchoring.

**AS** 4685 compliant

## **Sustainability Data**

COR10120



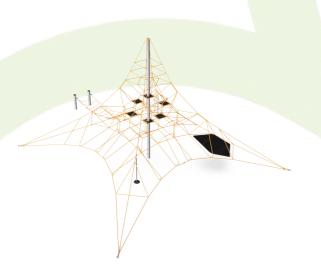

Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
COR101201-1104	1,951.66	3.38	43.97


The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

### Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



### Verification of CO<sub>2</sub> calculation of: Corocord



Data version no. 2023-10-05

The  $\mathrm{CO}_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.:  $\mathrm{COR314011}$ -1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mode

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of  $CO_2$  calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023


By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000


COR10120



\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

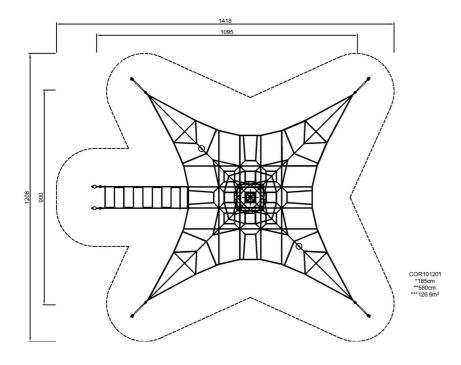

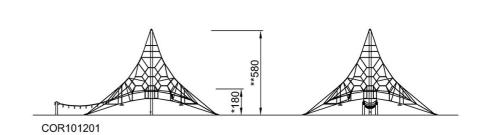

Attention! Foundation anchor blocks exceeds safety zone area. See installation instructions.

Click to see TOP VIEW

Click to see SIDE VIEW