


Arch Tunnel


COR20600

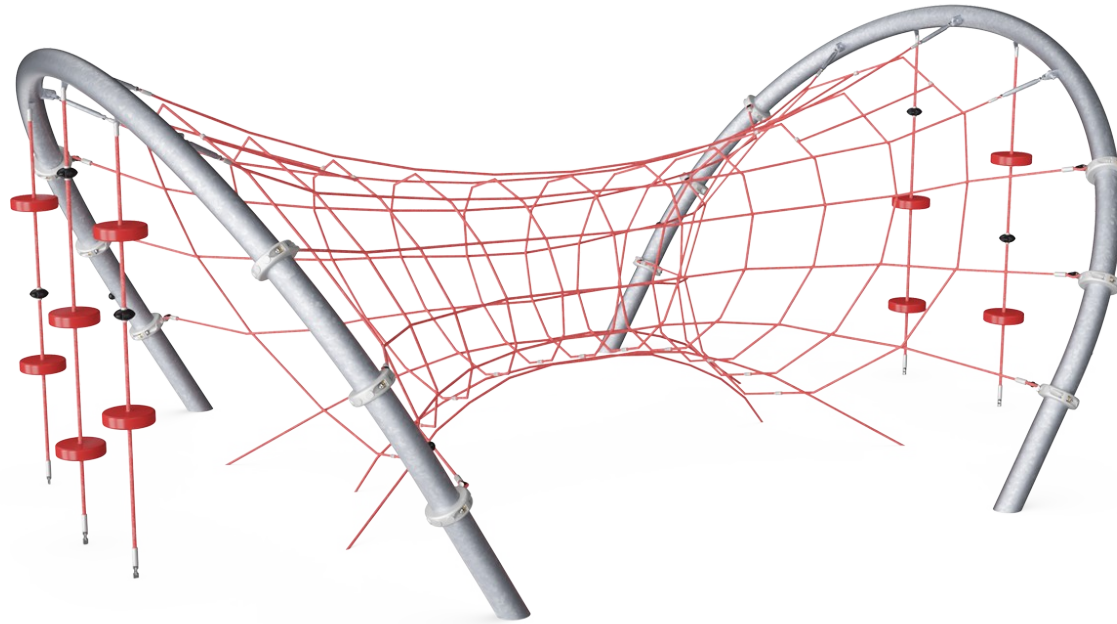


Item no. COR206001-1101

General Product Information

Dimensions LxWxH	590x420x250 cm
Age group	5+
Play capacity (users)	17
Colour options	  


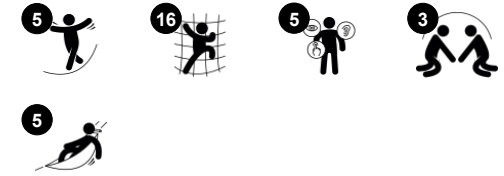


Organic, transparent and appealing. The Arch Tunnel offers excellent practice of both strength and coordination skills for young climbers.

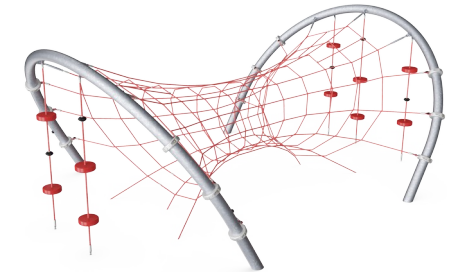


Arch Tunnel

COR20600

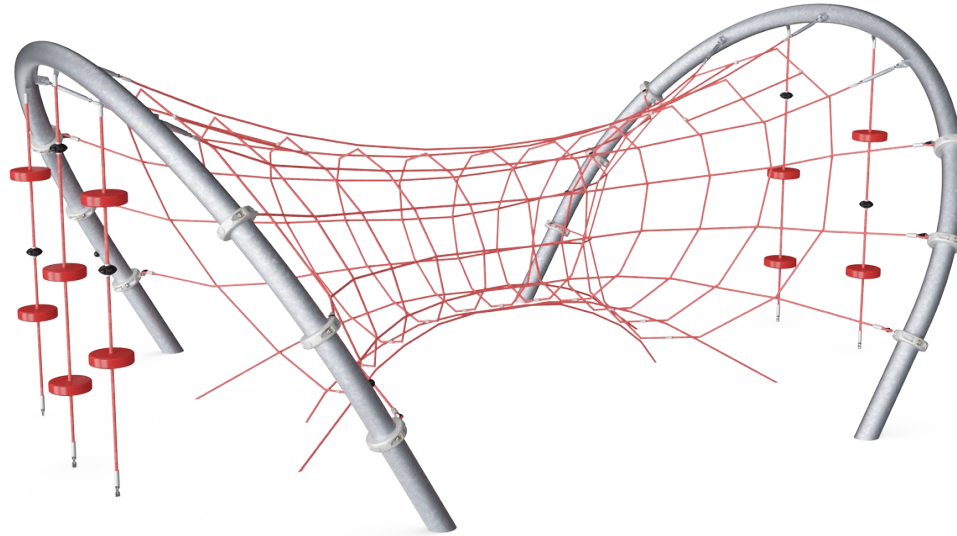


Height

Social-Emotional: children develop courage and self-regulation when being up high. This positively affects self-confidence.



Big meshes

Physical: the big meshes allow for climbing and crawling, supporting proprioception, cross coordination and spatial awareness. Climbing here takes muscle strength, pushing and pulling arms to get upwards. **Social-Emotional:** allow more children being seated together, sharing.




Transparency

Social-Emotional: the transparency makes possible cooperation and communication throughout, all important life-skills for children to learn.



Ropes with rubber discs

Physical: children develop cross-body coordination and muscle strength when stepping onto the disc and climbing the rope. Their sense of balance is trained when swaying gently. The sense of balance is important for instance for being able to sit still. **Social-Emotional:** socializing and turn-taking when deciding who should sit here.




Tunnel

Social-Emotional: invites socializing, gathering, sharing, chatting. The transparency allows for interaction with others outside the net.

Arch Tunnel

COR20600

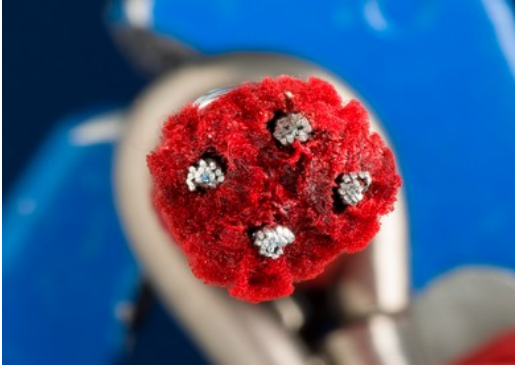

Corocord 16mm ropes are special 'Hercules'-type with galvanized four-stranded steel wires and a steel wire core. Each strand is tightly wrapped with PES yarn, which is melted onto each individual strand. The ropes are highly wear-and vandalism-resistant and can be replaced at site if needed. English version



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.



Fully coloured EPDM rubber discs with smooth surface. The moulded EPDM surrounds a hot dip galvanised steel core that ensures both the stability of the discs and durable fixation to the rope.



Corocord aluminium clamps are used as connectors between steel posts and rope. Two aluminium castings are bolted together. The height of the clamps is thus variable.



The steel arches are hot dip galvanised inside and outside with lead free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.

Item no. COR206001-1101

Installation Information

Max. fall height	250 cm
Safety surfacing area	72.1 m ²
Total installation time	33.1
Excavation volume	6.73 m ³
Concrete volume	4.71 m ³
Footing depth (standard)	110 cm
Shipment weight	810 kg
Anchoring options	In-ground ✓


Warranty Information

Aluminium clamps	10 years
Corocord rope	10 years
EPDM components	2 years
S-Clamps	10 years
Spare parts guaranteed	10 years



Sustainability Data

COR20600

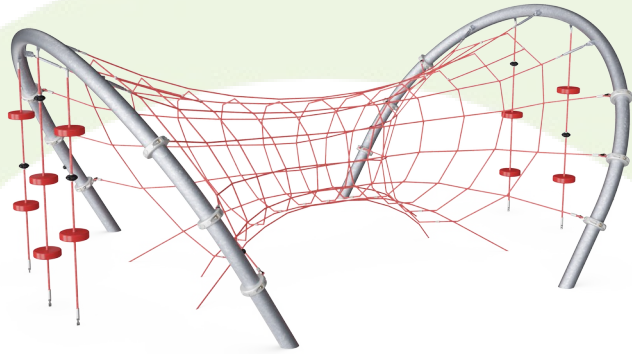

Cradle to Gate A1-A3	Total CO ₂ emission	CO ₂ e/kg	Recycled materials
	kg CO ₂ e	kg CO ₂ e/kg	%
COR206001-1101	2,165.30	3.07	44.36

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S
 C.F. Tietgens Boulevard 32C
 DK-5220 Odense SØ
 Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
 www.bureauveritas.dk
 +45 7731 1000





Arch Tunnel

COR20600

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

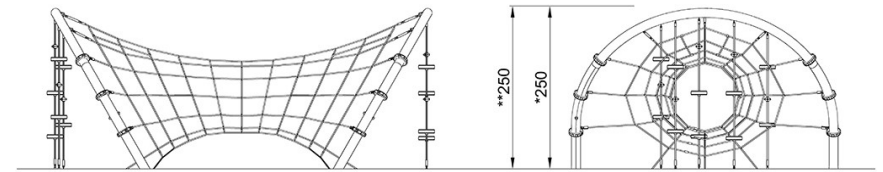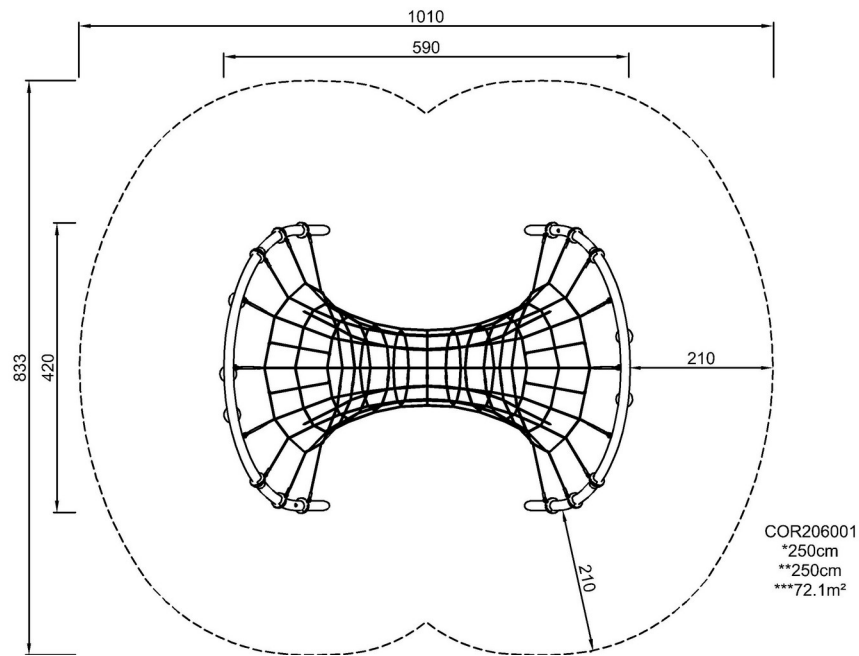

COR206001

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)