PCT210221





General Product Information

Dimensions LxWxH 1106x1231x651 cm
Age group 6+
Play capacity (users) 40
Colour options



WOW! The Giant L's high climb-balance-slidemeet features attract children hugely. The Giant has a unique variety of speedy sliding and gliding, gentle swaying and not least challenging climbing activities. All these are in a see-through tower, promoting thrill and social interaction. This ensures vigorous play, over and over. The open and closed slide and the fireman's pole and banister bars offer each their fast ride. This is severe fun and it stimulates social-emotional skills such as self-regulation and empathy. The balance bridge and the many climbing activities add thrill to the open towers also. This stimulates cross-coordination, and the senses of balance and space, useful in e.g. managing street traffic. On

ground level there is room for socializing in the swaying hammocks. This adds an active rest point to make friends in play.



PCT210221





Wackle bridge

Physical: sense of balance and space, and training of posture. Important for being able to sit still. **Social-Emotional:** cooperation, turntaking and friendly competition on the plates.





Long tube slide

Physical: sliding develops spatial awareness and the sense of balance. Social-Emotional: the height ensures extra speed and thrill. Empathy stimulated by turn-taking and consideration of others. Feeling of security when stopping on extra long slide mouth.



Pipe climber

Physical: muscle strength, cross coordination, and spatial awareness when climbing. Social-Emotional: encourage socializing when seated on the bars.



Fireman's pole

Physical: coordination is supported when going down, as well as arm and core muscles. Landing strengthens bone density, which is built for life in early childhood. Social-Emotional: turn-taking and risk-taking.



Play shel

Physical: the swaying movement stimulates the sense of balance, necessary to sit still on a chair. Social-Emotional: meeting, taking a break and turn-taking are supported, skills necessary to learn how to avoid conflicts.



Movable hammock

Physical: sense of balance when swaying, body pressure when lying. Support users lying or seated. Social-Emotional: meeting, pushing friends gently back and forth, turntaking. Creative: changing direction and position of hammock.



Banister bars

Physical: coordination is supported when going down, as well as arm and core muscles. Landing strengthens bone density, which is built for life in childhood. Social-Emotional: turn-taking and risk-taking.

PCT210221





Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.



All decks are supported by unique designed low-carbon aluminum profiles with multiple attachment options. The grey colored molded decks are made of 75% post-consumer waste PP material with a non-skid pattern and texture surface.



The main posts have an alloy with improved tensile and yield strength to ensure superior structural integrity of the high towers. The posts has hot dip galvanised base and powder coated top finish which ensure long lifetime.



Item no. PCT210221-0901

Installation Information Max. fall height 284 cm Safety surfacing area 103.8 m² Total installation time 140.8

Excavation volume 14.88 m³ Concrete volume 5.23 m³

Footing depth (standard) 90 cm Shipment weight 2,693 kg

Anchoring options In-ground

Surface

Warranty Information

| warranty information | |
|------------------------|----------|
| EcoCore HDPE | Lifetime |
| PP Decks | 10 years |
| Ropes & nets | 10 years |
| Spare parts guaranteed | 10 years |
| Steel post HDG | Lifetime |
| | |



High-quality polycarbonate with a thickness of 15mm. The graphic prints are added by a unique multi-layer print process where the inner layer is the image and outer transparent layer functions as protection. Both PC panel and the water-based lacquer are UV stabilized to prevent fading.



Fully welded steel frame with 45° cross welded steel grid of round steel pins with a diameter of 4mm. The airflow panel contributes to the overall structural integrity of the GIANT towers.



Curved and straight tunnel slide of either PE or stainless-steel material and supported by muliple steel rods to a center steel post. The tunnel slides are designed with perfect curve and inclination for a playful ride.



Sustainability Data

PCT210221



| Cradle to Gate A1-A3 | Total CO ₂ emission | CO₂e/kg | Recycled materials |
|----------------------|--------------------------------|------------|--------------------|
| | kg CO₂e | kg CO₂e/kg | % |
| PCT210221-0901 | 5,304.76 | 2.53 | 51.51 |

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))



Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Play systems



Data version no. 2023-10-05

The $\mathrm{CO_2}$ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Play systems" represented by item no.: PCM200321-0950.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

Some

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of ${\rm CO_2}$ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000





PCT210221



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

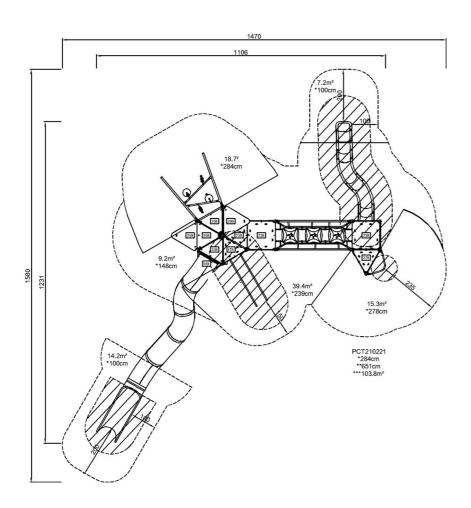

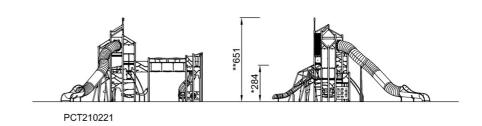

Click to see TOP VIEW

Click to see SIDE VIEW