Membrane Hammock

COR20402



Item no. COR204021-1101		
General Product Information		
Dimensions LxWxH	534x97x141 cm	
Age group	3+	
Play capacity (users)	4	
Colour options	$\bullet \bullet \bullet \bullet \bullet \bullet \bullet \bullet \bullet$	





Children can sway mildly or wildly, lie, be seated or even stand in the Membrane Hammock. Children of all abilities will take joy in the responsiveness and social interaction in the hammock. Pushing and pulling the friends from side to side is fun and also builds arm strength. The swaying motion supports important motor skills such as the sense of balance and the sense of space. The rhythmic movements support the understanding of rhythm. In combination, these three skills assist the child's ability to navigate space securely, for instance when judging distances and speed in traffic. The sense of balance is fundamental for all other motor skills and helps the child's motor stability: preventing falls and being able to sit still for longer periods of time.





COR20402







Hammock with membrane

Physical: supportive of milder or wilder sways, sitting, lying or standing. Great training of the sense of balance and spatial awareness, helping children to navigate their surroundings securely. **Social-Emotional:** spacious for several users of different ages, supporting socialization.



Double ropes Physical: pushing and pulling others. Holding the ropes support arm muscles. Can be pushed from a wheelchair position.

Membrane Hammock



COR20402



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand. The ropes are highly wear-and vandalism-resistant and can be replaced at site if needed.



Corocord membranes consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armouring made of woven polyester. The armouring and the two surface layers result in a total thickness of 7.5 mm.



The aluminium swages of the net are double conical with rounded ends and are as small as safety allows. The overall net design aims at keeping metal parts within the net to an absolute minimum, both in size and number, in order to provide the best possible rope climbing experience.

Item no. COR204021-1101		
Installation Information		
Max. fall height	140 cm	
Safety surfacing area	33.0 m²	
Total installation time	3.2	
Excavation volume	2.20 m³	
Concrete volume	1.40 m³	
Footing depth (standard)	110 cm	
Shipment weight	158 kg	
Anchoring options	In-ground 🗸	

Ham as COD204024 4404

Warranty Information		
Corocord rope	10 years	
Hot dip galvanised steel	Lifetime	
Membrane	2 years	
Spare parts guaranteed	10 years	



The steel structure are hot dip galvanised inside and outside with lead free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.



Through KOMPAN Variant Team, you can choose between additional 7 rope colours and customize your solution. The assortment is a wide span of colours ranking from elegant and expressive black or natural and toned-down hemp colour, to a range of attractive and eyecatching signal colours.



Sustainability Data

Cradle to Gate A1-A3

COR204021-1101

COR20402



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO, calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



By Bureau Veritas HSE www.bureauveritas.dk

BUREAU +45 7731 1000 VERITAS

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between

Total CO2

emission

kg CO₂e

415.39

CO2e/kg

kg CO₂e/kg

3.10

Recycled

materials

%

39.61

products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))





COR20402

* Max fall height | ** Total height | *** Safety surfacing area



* Max fall height | ** Total height

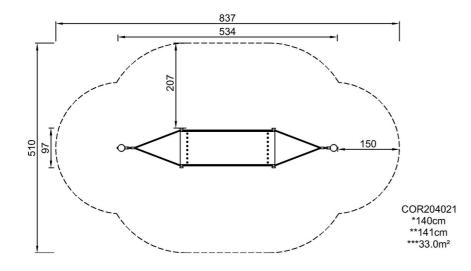



COR204021

Click to see TOP VIEW

Click to see SIDE VIEW

5 / 05/23/2024