


Quartet Seesaw


M155

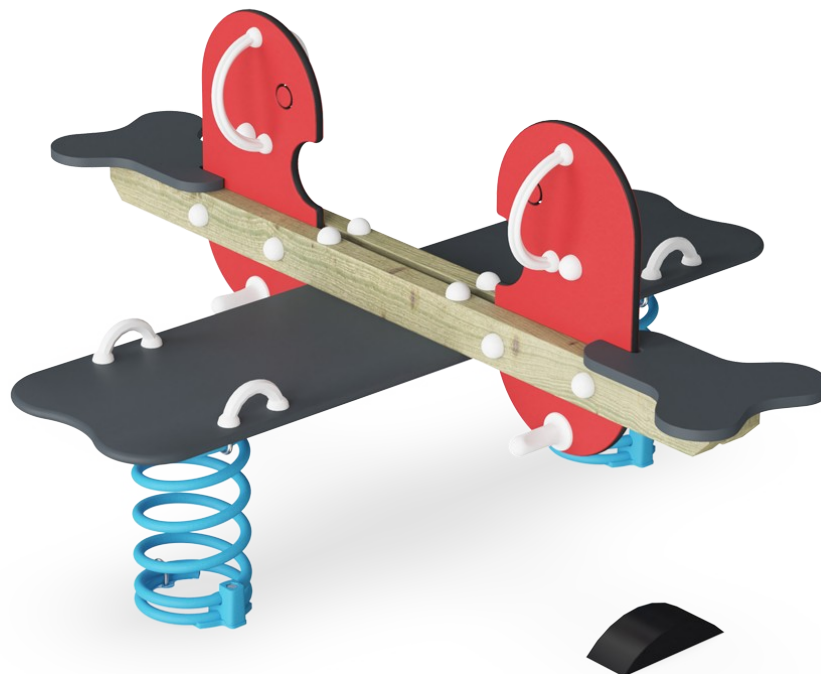


The quartet seesaw motivates young children to join in with play, rocking together. The classic KOMPAN design attracts children of all ages, and with four different seating options, encourages various body positions in rocking. The sturdy hand and foot supports allow for mild or wild rocking! The spring base makes it possible for different age ranges, including

adults, to rock together. Those who don't ride can sense the movements when seated on the side planks. There is room enough for a care giver, too. The seats at the end are big enough for older children as well as adults, and the thrill of rocking, individually or in pairs or groups, will make children play for longer. Playing on the Quartet Seesaw trains children's

muscles and motor skills, e.g. balance and coordination. The Quartet Seesaw also supports the development of social-emotional skills such as cooperation, consideration of others and turn-taking.

| | |
|------------------------------------|---|
| Item no. M15525-01P | |
| General Product Information | |
| Dimensions LxWxH | 140x164x82 cm |
| Age group | 3+ |
| Play capacity (users) | 4 |
| Color options |  |

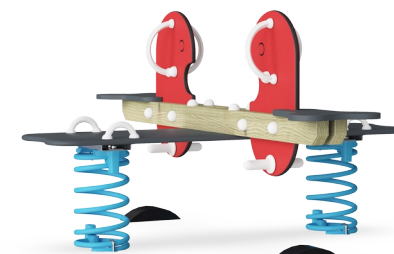

Quartet Seesaw

M155




Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.

KOMPAN Springs are made of high quality spring steel according to EN10270. The springs are cleaned by phosphating before they are painted with an epoxy primer and a polyester powder coating as top finish. The springs are fixed by unique anti pinch fittings for maximum safety and long lifetime.

The springs are fixed by unique anti pinch fittings for maximum safety and long lifetime.

| Item no. M15525-01P | |
|--------------------------|--------------------------|
| Installation Information | |
| Max. fall height | 100 cm |
| Safety surfacing area | 11.6 m ² |
| Total installation time | 5.0 |
| Excavation volume | 0.48 m ³ |
| Concrete volume | 0.00 m ³ |
| Footing depth (standard) | 42 cm |
| Shipment weight | 108 kg |
| Anchoring options | In-ground ✓ Surface ✓ |

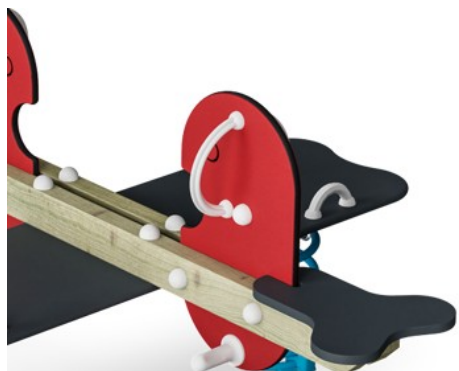

Handholds and footrests are made of injection moulded high quality nylon (PA6). PA6 has good wearing and impact strength.



Foot support is made of HPL with a thickness of 17,8mm with a very high wearing strength and a unique KOMPAN nonskid surface texture.




Beams are made of pine wood from sustainable European sources. The wood is pressure impregnated Class 3 with Tanalith E3475 according to EN335 (Equivalent to NTR Class AB).



Sustainability Data

M155

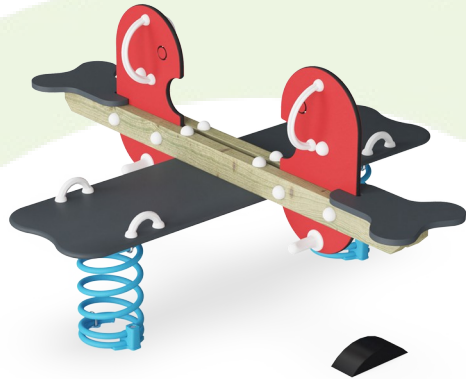

| Cradle to Gate A1-A3 | Total CO ₂ emission | CO ₂ e/kg | Recycled materials |
|----------------------|--------------------------------|-------------------------|--------------------|
| | kg CO ₂ e | kg CO ₂ e/kg | % |
| M15525-01P | 185.30 | 1.77 | 44.80 |

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S
 C.F. Tietgens Boulevard 32C
 DK-5220 Odense SØ
 Denmark



Verification of CO₂ calculation of: Freestanding play equipment



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: GXY916012-3417.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
 www.bureauveritas.dk
 +45 7731 1000




Quartet Seesaw


M155

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

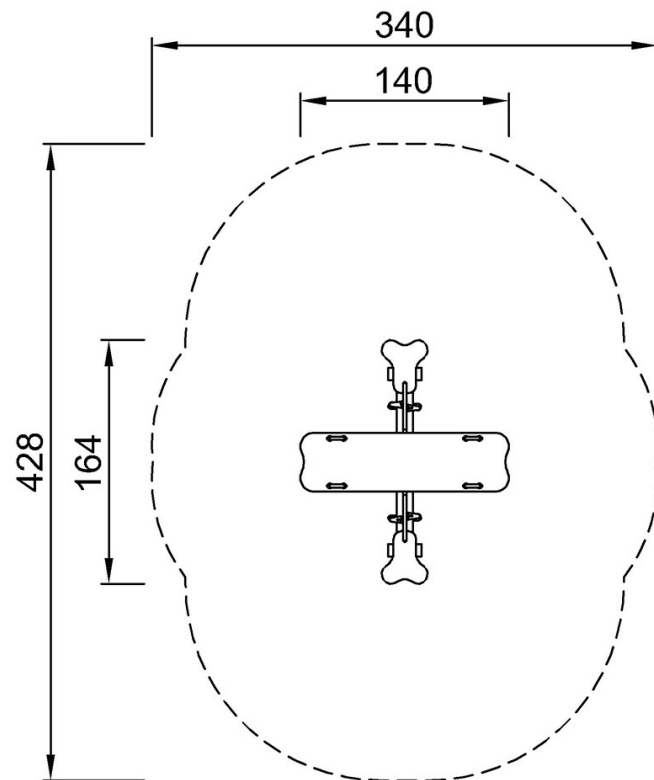

M15525P
*100cm
**82cm
***11.6m²

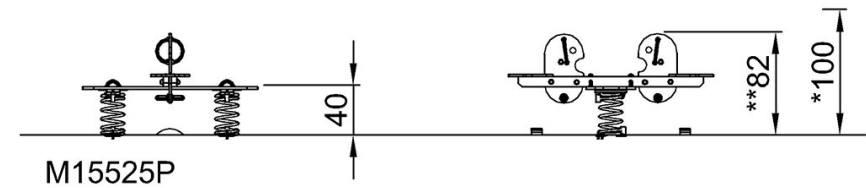

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)