


Circite with House Membrane



COR10481

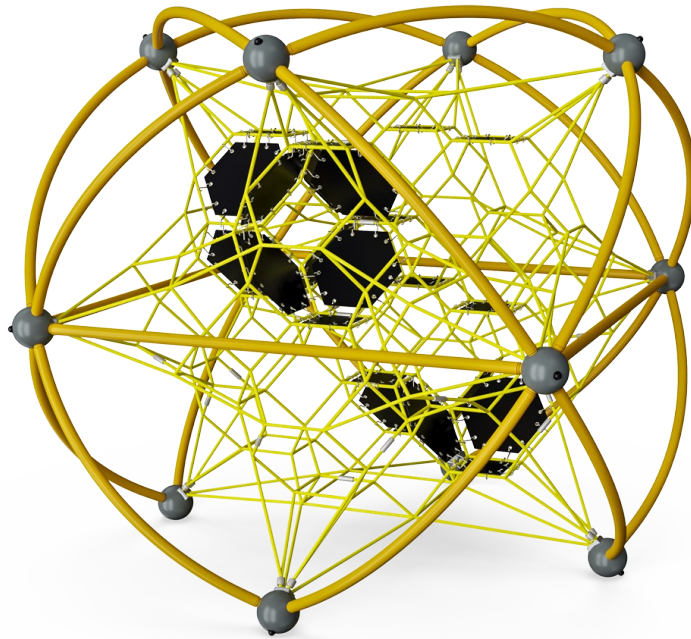

The Circite With House Membrane is a three-dimensional rope environment in which the child can move freely in all directions. This ensures hours of play. Inside the structure, the children can prove their climbing skills on the rope, while the frame and long ropes at the sides are perfectly suited for hanging. Muscle strength, cross-body coordination and spatial



awareness are supported. These skills are fundamental for judging distances and managing obstacles securely. Apart from physical stimulation, membranes allow children to sit and talk, socializing.

Item no. COR104811-0405	
General Product Information	
Dimensions LxWxH	13'7"x13'7"x10'3"
Age group	2 - 5
Play capacity (users)	30
Color options	

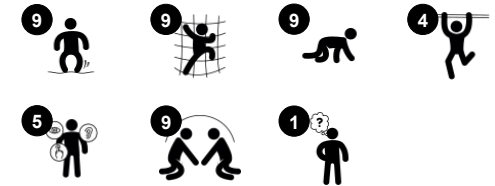


Circite with House Membrane

COR10481

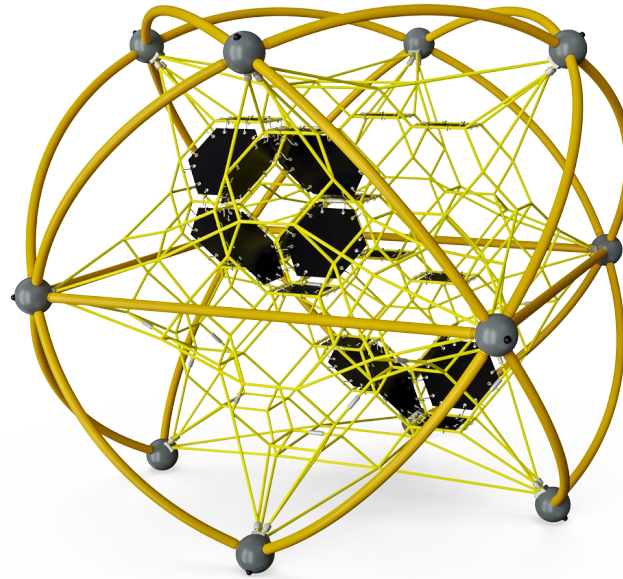


Height

Social-Emotional: children develop courage and self-regulation when being up high. This positively impacts self-confidence.




Membrane path

Physical: a faster way up, due to the extra support of the membrane. **Social-Emotional:** a meeting path with points for retreat from the rope landscape.




Connected nets

Physical: the connected nets make the climbers feel the movements of the others, adding a dimension of fun and demanding concentration when holding tight to the rope. Cross-coordination and all muscle groups are trained. **Social-Emotional:** the climbers' movements affect the other climbers, so consideration and turn-taking is supported.



Transparency

Social-Emotional: the transparency makes cooperation and communication possible throughout, important life-skills for children to practice.



Big meshes

Physical: the big meshes allow for climbing and crawling, supporting proprioception, cross coordination and spatial awareness. Climbing here takes muscle strength, pushing and pulling arms to get upwards. **Social-Emotional:** allow more children being seated together, sharing.

Circite with House Membrane

COR10481



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope climbing structures.



The aluminium swages of the net are double conical with rounded ends and are as small as safety allows. The overall net design aims at keeping metal parts within the net to an absolute minimum, both in size and number, in order to provide the best possible rope climbing experience.




Corocord membranes consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armoring made of woven polyester. The armoring and the two surface layers result in a total thickness of 7.5 mm.

Item no. COR104811-0405	
Installation Information	
Max. fall height	9'10"
Safety surfacing area	456ft ²
Total installation time	21.3
Excavation volume	2.3yd ³
Concrete volume	1.28yd ³
Footing depth (standard)	2'11"
Shipment weight	1587lbs
Anchoring options	In-ground ✓
Warranty Information	
Corocord Rope	10 Years
EcoCore HDPE	Lifetime
Hot dip galvanized steel	Lifetime
Membrane	2 Years
Spare Parts Availability	10 Years



The metal parts are made of high quality steel, hot dip galvanized inside and outside with lead-free zinc. On the outside, there is an additional layer of powder coating. This ensures both excellent corrosion resistance and colorful design expression.

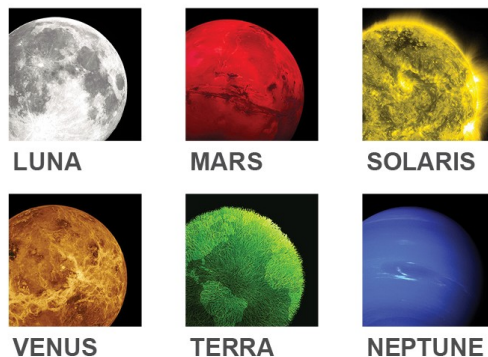


The COROCORD Frame Nets are available in 6 galactic color themes. The themes draw on bright colors that appeal to children of all ages. Can be changed in the configurator.

Elevated activities 0	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	0	1	1
Required	0	1	1



Sustainability Data

COR10481

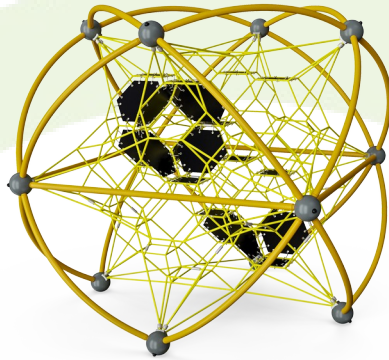

Cradle to Gate A1-A3	Total CO ₂ emission	CO ₂ e/kg	Recycled materials
	kg CO ₂ e	kg CO ₂ e/kg	%
COR104811-0405	1,986.85	4.00	37.30

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S
 C.F. Tietgens Boulevard 32C
 DK-5220 Odense SØ
 Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
 www.bureauveritas.dk
 +45 7731 1000





Circite with House Membrane

COR10481

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

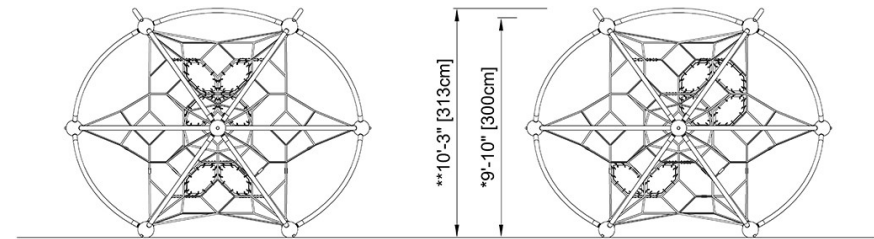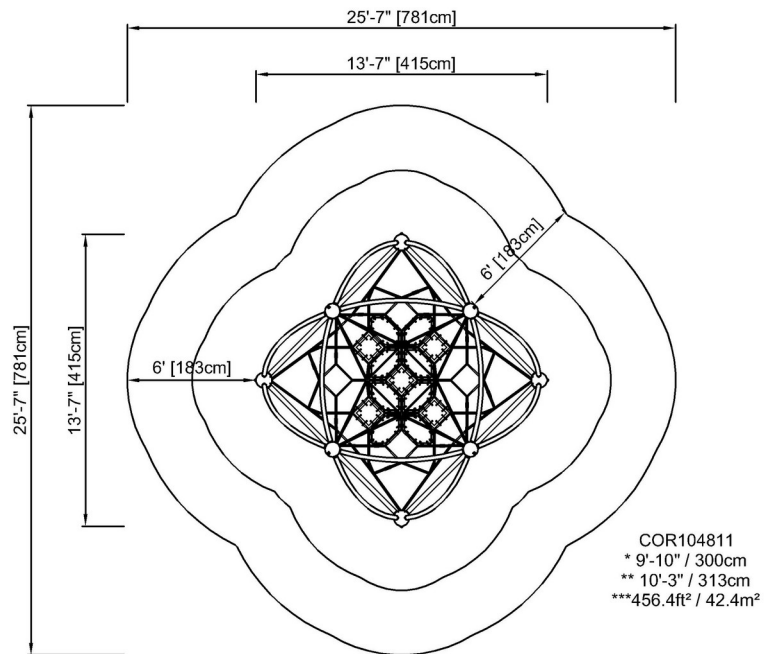

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)