
CRP411001



Item no. CRP411001-0901		
General Product Information		
Dimensions LxWxH	1108x1094x610 cm	
Age group	6+	
Play capacity (users)	56	
Color options		





climbing, crawling, and balancing supports the children's motor skills ABC; agility, balance, and coordination. Arms, legs, and core muscles are also used when climbing the net. The transparent play structure stimulates spatial awareness and eases social interaction. The spacious top net offers a great climbing challenge and a desired meeting point to be together with friends. Social-emotional skills such as turn-taking and empathy are used repeatedly when climbing the Nimbus Cloud.

1 / 10/11/2024


CRP411001





Nimbus Cloud Net

Physical: the connected nets make climbers feel the movements of the other climbers, adding a dimension of fun and demanding concentration when holding tight to the rope. All muscle groups are trained, as well as cross-coordination and spatial awareness. Social-Emotional: room for breaks for big or smaller groups. The transparent structure and areas in, on and under the net support social interaction, cooperation and turn-taking skills.

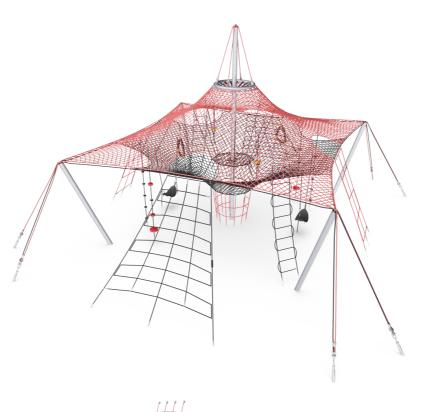



Ropes with rubber discs

Physical: children develop cross-body coordination and muscle strength when stepping onto the disc and climbing the rope. Their sense of balance is trained when swaying gently. The sense of balance is important for instance for being able to sit still. Social-Emotional: socializing and turn-taking when deciding who should sit here.

8

Rope ladder

Physical: cross-coordination and spatial awareness are trained when children climb the slightly slanted, swaying rope ladder. Climbing also trains leg and arm muscles. Social-Emotional: learning about turn-taking and empathy.



Top ring

Physical: spatial awareness and sense of balance benefit from climbing and being up high in a moving net. The height allows for wider views and trains the understanding of distances, important for navigating the body confidently and securely. **Social-Emotional:** children are challenged on their courage when climbing up high. Overcoming challenges positively affects self-esteem and confidence. The top ring provides a great place to be with friends.



Climbing net

Physical: the inclined net supports the upward climbing movement of the body. Cross-coordination, spatial awareness and physical strength are trained, due to big steps when wanting to climb up fast. Social-Emotional: the big meshes allow for more children being seated together, sharing.



Hammock

Physical: coordination and sense of balance when swaying. **Social-Emotional:** meeting, pushing friends gently back and forth, turntaking.



Open triangle plate

Physical: arm, leg and core muscles are developed when climbing up/through. Proprioception and spatial awareness are also supported, both motor skills that help navigating the body in space. Social-Emotional: swaying, bouncy seat for a break, inviting socializing and turn-taking.

CRP411001





Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made of +95% Post-consumer materials and is inductively melted onto each strand to obtain excellent wear and tear resistance.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.



The aluminium swages of the net are double conical with rounded ends and are as small as safety allows. The overall net design aims at keeping metal parts within the net to an absolute minimum, both in size and number, in order to provide the best possible rope climbing experience.

Item no. CRP411001-0901			
Installation Information			
Max. fall height	29	90 cm	
Safety surfacing area	165	5.3 m²	
Total installation time		62.7	
Excavation volume	59.8	84 m³	
Concrete volume	33.8	80 m³	
Footing depth (standard)	ç	90 cm	
Shipment weight	2,2	13 kg	
Anchoring options	In-ground	~	

Item no CRP/11001_0001


Warranty Information		
Corocord rope	10 years	
Membrane	2 years	
S-Clamps	10 years 10 years	
Spare parts guaranteed	10 years	
Steel post HDG	Lifetime	



In the centre of the net is the mast, made of high quality seamless steel. The structure of the mast as an oscillating support is statically favourable and equalizes the oscillations in the net. The masts are hot dip galvanised as standard, with the design option of additional powder coating.



Corocord membranes consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armouring made of woven polyester. The armouring and the two surface layers result in a total thickness of 8 mm.



The COROCORD Frame Nets are available in 6 galactic colour themes. The themes draw on bright colours that appeal to children of all ages. Can be changed in the configurator.



Sustainability Data

Cradle to Gate A1-A3


CRP411001-0901

CRP411001



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark







Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

sind

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Total CO2

emission

kg CO₂e

6,219.12

CO2e/kg

kg CO₂e/kg

3.43

Recycled

materials

%

51.16

By Bureau Veritas HSE


www.bureauveritas.dk

+45 7731 1000


CRP411001

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

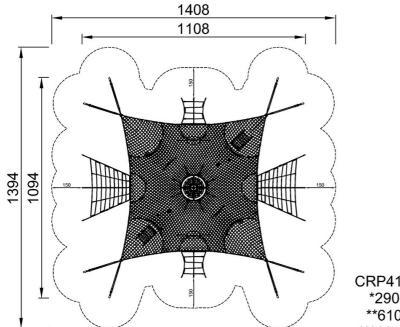

CRP411001 *290cm **610cm ***165.3m²



CRP411001

Click to see TOP VIEW

