

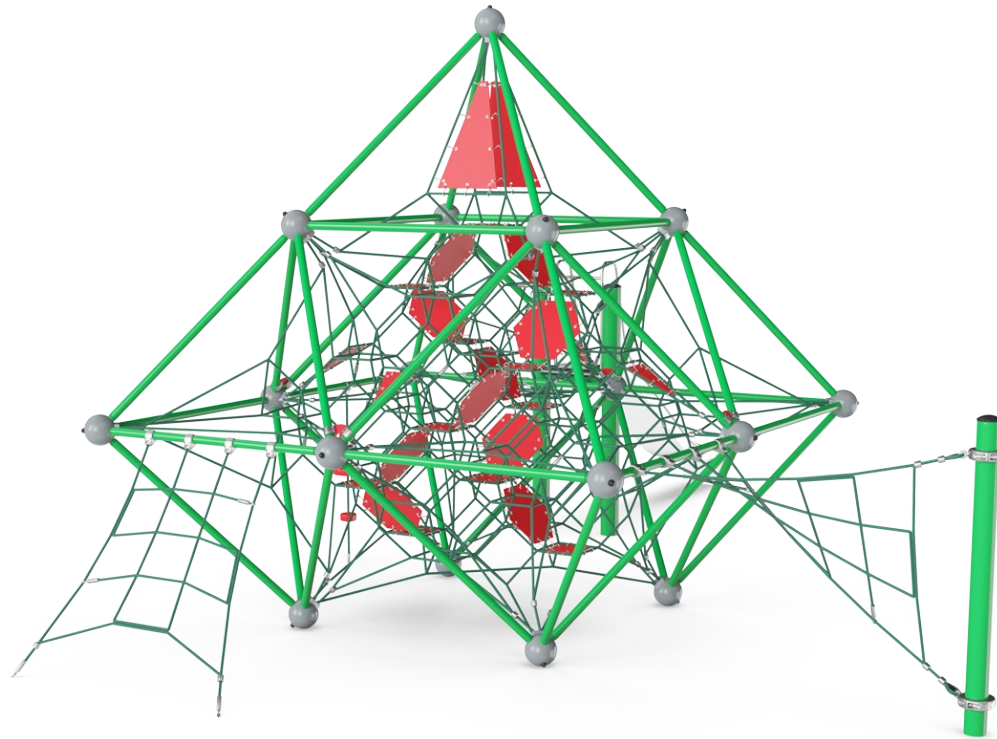


Medite with add-ons

COR10513

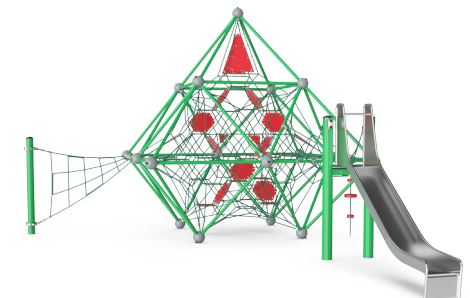

Item no. COR105131-0403	
General Product Information	
Dimensions LxWxH	622x908x446 cm
Age group	5+
Play capacity (users)	46
Color options	

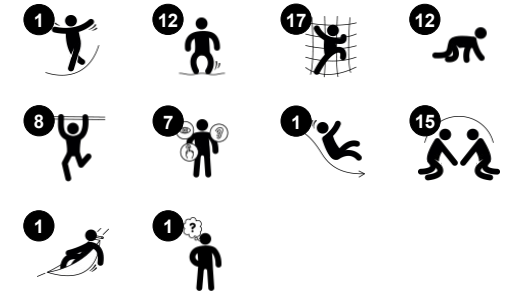

The Medite with Add-Ons intensely motivates children to climb, again and again and want to come back. The feeling of achievement when having climbed to the top is phenomenal. Climbing and swaying on the bouncy nets with rubber seats train the motor skills' ABC: Agility, Balance and Coordination. Major muscle groups are used when children climb in the net.

The swaying play ropes train balance – a motor skill which is fundamental for children's ability to sit still and concentrate. The slide is a great way down, making an irresistible loop of climbing up and sliding down, training turn taking. The membranes are thrilling destinations up high and stimulate children's social-emotional skills, such as courage and


self regulation. Ground level access is provided with the slightly tilting side nets, training proprioception and cross-coordination. All in all, a climbing adventure for the whole family.

Medite with add-ons


COR10513



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope climbing structures.

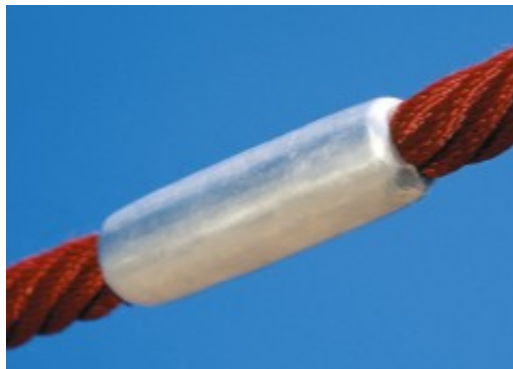

The aluminium swages of the net are double conical with rounded ends and are as small as safety allows. The overall net design aims at keeping metal parts within the net to an absolute minimum, both in size and number, in order to provide the best possible rope climbing experience.

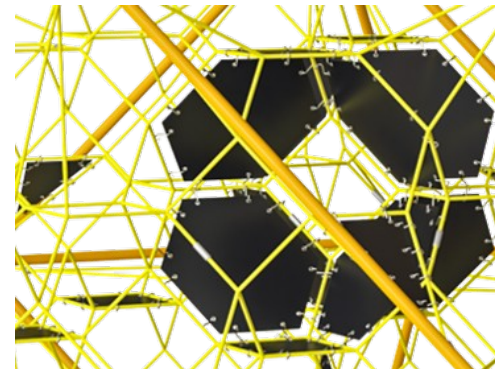


Corocord membranes consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armouring made of woven polyester. The armouring and the two surface layers result in a total thickness of 7.5 mm.

Item no. COR105131-0403	
Installation Information	
Max. fall height	174 cm
Safety surfacing area	74.1 m ²
Total installation time	41.0
Excavation volume	5.70 m ³
Concrete volume	3.41 m ³
Footing depth (standard)	110 cm
Shipment weight	1,672 kg
Anchoring options	In-ground ✓



The metal parts are made of high quality steel, hot dip galvanised inside and outside with leadfree zinc. On the outside, there is an additional layer of powder coating. This ensures both excellent corrosion resistance and colourful design expression.

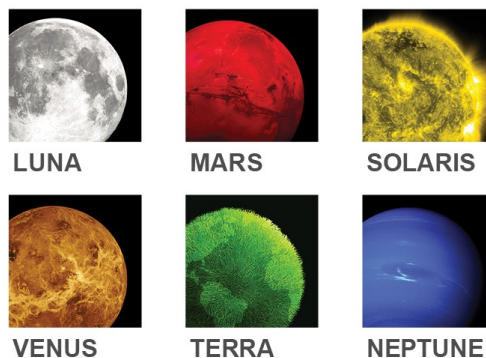

The COROCORD Frame Nets are available in 6 galactic colour themes. The themes draw on bright colours that appeal to children of all ages. Can be changed in the configurator.




The stainless steel components are made of high quality stainless steel in compliance with global playground standards. The steel is glass blasted after manufacturing to ensure a smooth gliding surface.



Sustainability Data

COR10513

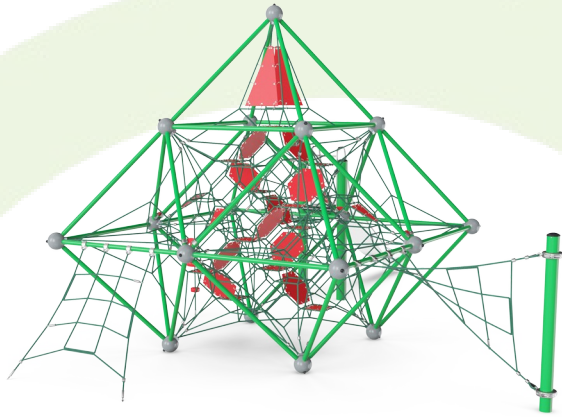

Cradle to Gate A1-A3	Total CO ₂ emission	CO ₂ e/kg	Recycled materials
	kg CO ₂ e	kg CO ₂ e/kg	%
COR105131-0403	3,996.40	3.58	44.70

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S
 C.F. Tietgens Boulevard 32C
 DK-5220 Odense SØ
 Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
 www.bureauveritas.dk
 +45 7731 1000





Medite with add-ons

COR10513

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

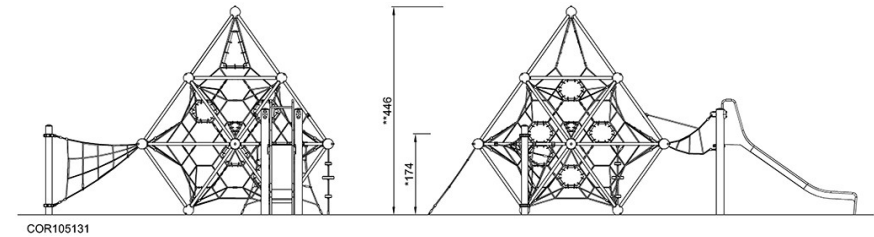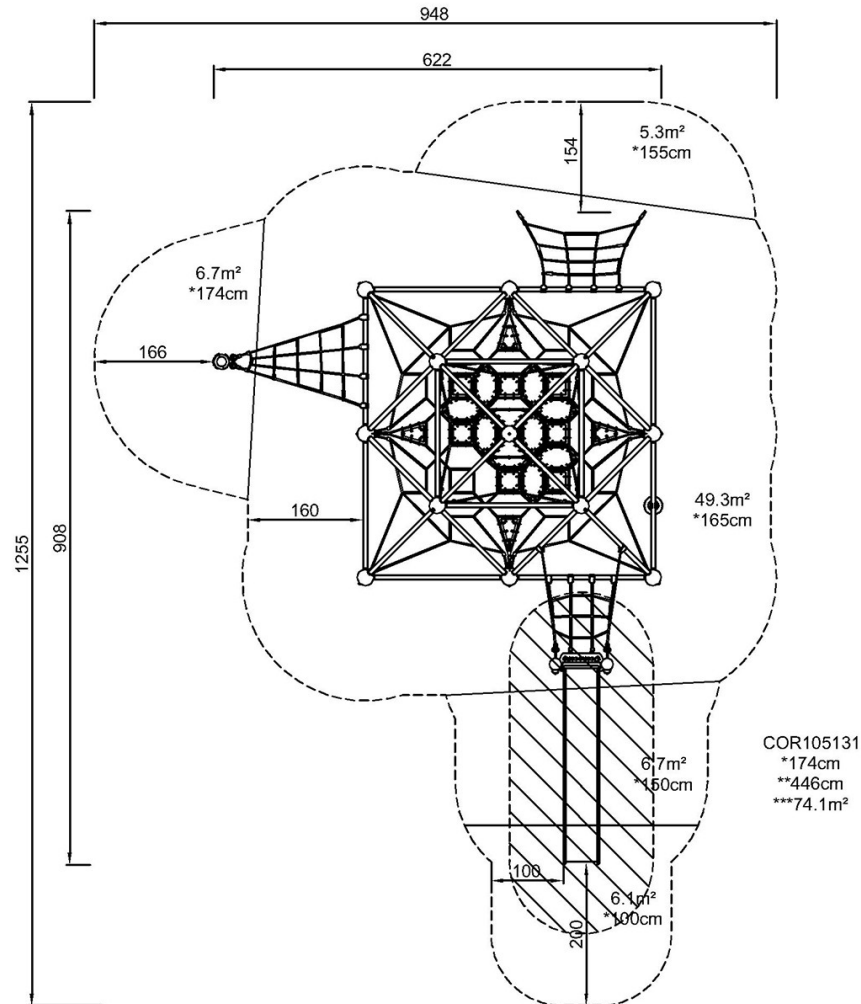

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)