
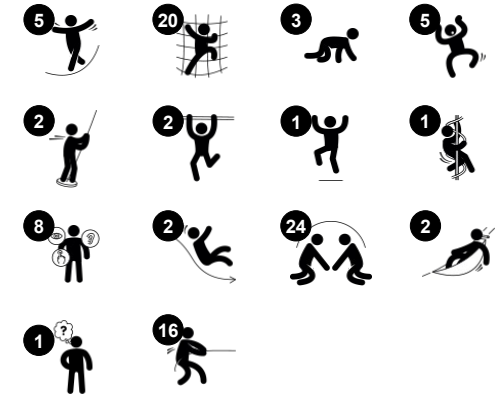


Tall Castle, Medium

NRO428



Item no. NRO428-1222	
General Product Information	
Dimensions LxWxH	1506x886x802 cm
Age group	6+
Play capacity (users)	60
Color options	



The magnificent Tall Castle adds a medieval daredevil touch to the play-ground, attracting children over and over. With its wild distribution of high-paced, multi-level play options, the Tall Castle allows for a wide range of ages, abilities and families to have fun in play. The ground level offers nice rest areas, retraction points for all. At the sides, lower loops of play guarantee

thrills for younger or less daring players. In the middle, a multitude of highly varied accesses takes the children to the next level. From here even more accesses with internal climber nets and outside climbing cage lead to the two tops. The reward is a fabulously wild, speedy slide ride to the ground. Taking on the varied play challenges of the Tall Castle trains children's

ability to suppress fear and judge their abilities. They train risk taking in a safe, thrilling, playful way.

Tall Castle, Medium

NRO428



All Organic Robinia products by KOMPAN are made of Robinia wood from sustainable European sources. On request it can be supplied as FSC® Certified (FSC® C004450).



The paint used for coloured components is water based environmental friendly with excellent UV resistance. The paint is in compliance with EN 71 Part 3.



The Robinia products are designed with a KOMPAN colour concept with a number of different standard colours. The wood can also be supplied as untreated or with brown painted with a pigment that maintains the wood colour.

Item no. NRO428-1222

Installation Information

Max. fall height	230 cm
Safety surfacing area	124.9 m ²
Total installation time	151.8
Excavation volume	0.00 m ³
Concrete volume	0.00 m ³
Footing depth (standard)	120 cm
Shipment weight	12,041 kg
Anchoring options	In-ground ✓



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand.



Curved and straight stainless-steel tunnel slides are supported by multiple steel rods to a center steel post. The tunnel slides are designed with perfect curve and inclination for a playful ride.



The wire frame tunnel is made of hot dip galvanised high quality steel. Corocord 16mm ropes are special 'Hercules'-type with galvanised four-stranded steel wires and a steel wire core. Each strand is tightly wrapped with PES yarn, which is melted onto each individual strand.

**EN
1176**
compliant

Sustainability Data

NRO428



Cradle to Gate A1-A3	Total CO ₂ emission	CO ₂ e/kg	Recycled materials
	kg CO ₂ e	kg CO ₂ e/kg	%
NRO428-1222	16,633.10	1.49	14.60

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S
 C.F. Tietgens Boulevard 32C
 DK-5220 Odense SØ
 Denmark



Verification of CO₂ calculation of: Nature play



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Nature play" represented by item no.: NRO409-0621.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
 www.bureauveritas.dk
 +45 7731 1000



