## **Playhouse with Desk**

KPL403



| Item no. KPL40311-0601      |               |  |  |  |
|-----------------------------|---------------|--|--|--|
| General Product Information |               |  |  |  |
| Dimensions LxWxH            | 120x99x164 cm |  |  |  |
| Age group                   | 6m+           |  |  |  |
| Play capacity (users)       | 4             |  |  |  |
| Color options               |               |  |  |  |



The home-themed Playhouse with Desk will attract and excite toddlers again and again. There are three extra features that greatly increase their desire for playing: The scale of the house is perfect for toddlers. The openness under the desk adds to the overall transparency, and children can play together from the outside and the inside of the house. The ground level play makes it possible for all children to play here. The openness of design allows for looping around, into and out of the house repeatedly. Having a meeting point like the house allows for social interaction and the children's first group-play with friends. Having sheltered, easily accessible meeting points like the Playhouse with Desk can be the start of a life long friendship with peers from the nursery.





## **Playhouse with Desk**

KPL403







Desk Social-Emotional: fine meeting place and a space creator. Sharing and cooperation from both sides create a social scenario that supports communication and cooperation.



Theme Cognitive: suggests a theme and supports dramatic play, which stimulates language and communication skills.

# **Playhouse with Desk**



KPL403



Panels of 19mm EcoCore<sup>™</sup>. EcoCore<sup>™</sup> is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.



The main tower posts are available in two types of material: European pine wood posts, pressure impregnated Class 3 with Tanalith E3475 according to EN335 (Equivalent to NTR Class AB). Aluminum post t=2mm with anodized surface treatment. Base material EN AW-6060 T66.



The main posts are equipped with hot dip galvanised steel footings. The steel footings elevates the posts 20mm from ground level to avoid contact with surfacing material.

| Item no. KPL40311-0601   |           |       |  |  |
|--------------------------|-----------|-------|--|--|
| Installation Information |           |       |  |  |
| Max. fall height         |           | 0 cm  |  |  |
| Safety surfacing area    | 12.       | .1 m² |  |  |
| Total installation time  |           | 4.4   |  |  |
| Excavation volume        | 0.2       | 22 m³ |  |  |
| Concrete volume          | 0.0       | )0 m³ |  |  |
| Footing depth (standard) | 6         | 0 cm  |  |  |
| Shipment weight          | ç         | 91 kg |  |  |
| Anchoring options        | In-ground | ~     |  |  |
|                          | Surface   | ~     |  |  |
| Warranty Information     |           |       |  |  |
| Aluminum                 | 15 y      | /ears |  |  |
| EcoCore HDPE             | Life      | etime |  |  |
| Hollow PE parts          | 10 y      | /ears |  |  |
| Pinewood                 | 10 y      | /ears |  |  |
| Spare parts guaranteed   | 10 y      | /ears |  |  |



## **Sustainability Data**

KPL403




| Cradle to Gate A1-A3 | Total CO <sub>2</sub> emission | CO₂e/kg    | Recycled materials |
|----------------------|--------------------------------|------------|--------------------|
|                      | kg CO₂e                        | kg CO₂e/kg | %                  |
| KPL40311-0601        | 103.55                         | 1.46       | 40.18              |

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))



**Kompan A/S** C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark







#### Data version no. 2023-10-05

The  $CO_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Play systems" represented by item no.: PCM200321-0950.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023




www.bureauveritas.dk +45 7731 1000

**By Bureau Veritas HSE** 





KPL403





\* Max fall height | \*\* Total height

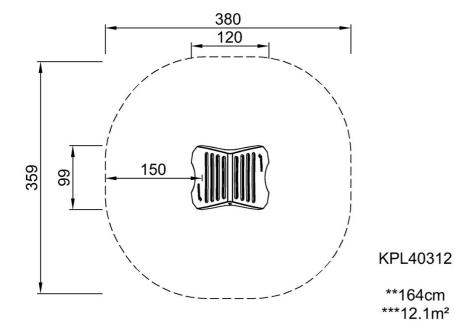

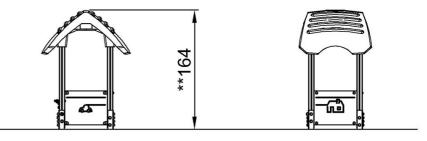

KPL40312

Click to see TOP VIEW

Click to see SIDE VIEW

5 / 10/11/2024