CRP250802





Item no. CRP250802-0902

General Product Information

Dimensions LxWxH 777x576x399 cm
Age group 5 - 12
Play capacity (users) 20

Colour options





The Mountain Trail is an exciting and multifunctional play structure that attracts play instantly and invites back for more, again and again. From ground level children can crawl the Zig-Zag Slider and continue through the horizontal nets. Afterwards, they can chill in the nets before moving to the slide for a fun egress back to ground level. Climbing, crawling and

balancing the Mountain Trail is a fun challenge which builds the ABC of motor skills: Agility, Balance and Coordination. These are fundamental to children's ability to navigate the world with body confidence. The Musca Spinner whirls around when children enter and put their upper body muscle force into pushing and pulling it around. The many responsive,

active play features of the Mountain Trail invite socializing, turn-taking and empathy, important social-emotional skills for life.

CRP250802









### **Curved slide**

Physical: sliding develops spatial awareness and a sense of balance. Furthermore, the core muscles are trained when sitting upright going down. Social-Emotional: empathy stimulated by turn-taking.










### Membrane

**Physical:** the bouncy membrane develops the sense of balance when the child stands, steps or sits here. **Social-Emotional:** great point for a break or meeting with friends.













### Climbing wall

Physical: climbing here develops cross coordination, which supports cross-modal perception, necessary for other skills such as reading.







#### Musca spinner

Physical: balance when standing, sitting and rotating, muscles develop when holding tight. Social-Emotional: cooperation in getting the spinner to turn.

CRP250802



10 years


10 years



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.



Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.

Item no. CRP250802-0902					
Installation Information					
Max. fall height	185	5 cm			
Safety surfacing area	78.3	3 m²			
Total installation time	:	27.6			
Excavation volume	13.68	8 m³			
Concrete volume	7.7	7 m³			
Footing depth (standard)	90 cm				
Shipment weight	96	3 kg			
Anchoring options	Surface ✓				
	In-ground	~			
Warranty Information					
Aluminium clamps	10 ye	ears			
Hot dip galvanised steel	Lifetime				
Painted toplayer	10 years				



Colored steel components have a base of hot dip galvanization and a powder coated top finish. This provides an ultimate corrosion resistance in all climates around the world. Other steel surfaces are hot dip galvanized inside and outside with lead free zinc.



Corocord smart clamps are carefully designed in every detail to ensure superior flexibility in high quality aluminum material. The smart clamps are attached around the posts with four steel bolts. Not used attachment points are closed with PA caps.



Molded PE slides made with 33% post-consumer materials in different colors in one-piece design with a wall thickness of minimum 5mm. The PE is tested for UV stability and has excellent impact strength and it is usable within a large temperature span.

Elevated activities 2	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	2	3	2
Required	1	1	1

CSA Z614 compliant

Ropes & nets

Spare parts guaranteed

## **Sustainability Data**

CRP250802





Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO <sub>2</sub> e/kg Recycled materials	
	kg CO₂e	kg CO₂e/kg	%
CRP250802-0902	2,339.63	3.11	47.29


The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

### Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



### Verification of CO<sub>2</sub> calculation of: Corocord



Data version no. 2023-10-05

The  $\mathrm{CO}_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.:  $\mathrm{COR314011}$ -1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

misi

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of  $CO_2$  calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023


By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000


CRP250802



\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

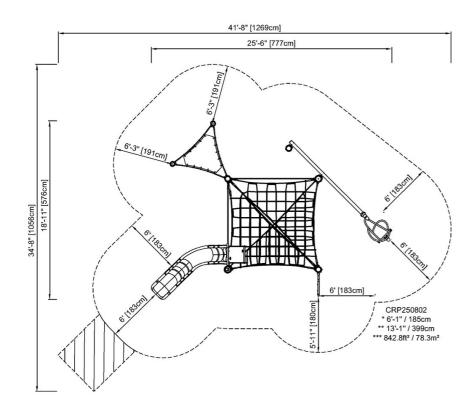

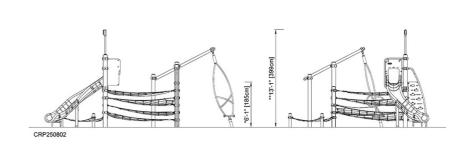

Click to see TOP VIEW

Click to see SIDE VIEW