


Item no. PCE112021-0902		
General Product Information		
Dimensions LxWxH	369x416x200 cm	
Age group	3+	
Play capacity (users)	7	
Color options		





Wow! The Taiga is a fantastic structure that attracts children's attention. The variety of activities will encourage children to play longer and come back again and again. The Taiga offers ample climbing and sliding for active children. The varied climbing features train proprioception and cross-body coordination, which are fundamental for children's mathematical understanding. The slides are thrilling paths to return to the ground. Apart from climbing and sliding, there are plenty of opportunities for social play that will help children to build important social and emotional skills, and will motivate children to play for longer.





Rock climber Physical: supports cross coordination and leg, arm and hand strength. Social-Emotional: the inclination makes climbing feel secure, especially for younger children.





Curved slide

Physical: sliding develops spatial awareness and a sense of balance. Furthermore, the core muscles are trained when sitting upright going down. Social-Emotional: empathy stimulated by turn-taking. Cognitive: young children develop their understanding of space, speed and distances when sliding down quickly.




Climbing pole Physical: cross coordination and muscle strength are trained. Social-Emotional: turntaking and cooperation.



Balcony

Social-Emotional: the balcony invites meetings and interaction with people on ground level. **Cognitive:** invites dramatic play and performance, which stimulates language development. Taiga PCE112021





Panels of 19mm EcoCore[™]. EcoCore[™] is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.



The ELEMENTS roofs are made of recyclable PE made from 33% post consumer recycled materials with a minimum wall thickness of 5 mm to ensure high durability in all climates around the world. The steel pipes are hot dip galvanised inside and outside for maximum durability.



Sails of commercial 95 high density PE knitted specially for sun-shade structures. The sails are treated with UV stabilizers to ensure a long lifetime. The sails are supported by a hot dip galvanised steel frame and tightened by stainless steel devices.


Item no. PCE11202	1-0902	
Installation Information		
Max. fall height	118	3 cm
Safety surfacing area	30.	7 m²
Total installation time		13.1
Excavation volume	0.5	8 m³
Concrete volume	0.04	4 m³
Footing depth (standard)	90) cm
Shipment weight	35	4 kg
Anchoring options	In-ground	~
	Surface	~



The main posts are made of high quality pregalvanized steel with powder coated top finish. Post tops are closed with caps of UV stabilized nylon (PA6). The grey colored molded decks are made of 75% post-consumer waste PP material with a non-skid pattern and texture surface. All decks are supported by unique designed low-carbon aluminum profiles with multiple attachment options.



The slides are available in either molded PE made from 33% recycled post-consumer materials in different colors or in full AISI304 stainless steel with a thickness of 2mm.



The steel surfaces are hot dip galvanised inside and outside with lead free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.



Sustainability Data

Cradle to Gate A1-A3


PCE112021-0902

PCE112021



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark







Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Play systems" represented by item no.: PCM200321-0950.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

Somo

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Total CO2

emission

kg CO₂e

696.96

CO2e/kg

kg CO₂e/kg

2.57

Recycled

materials

%


46.60






* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

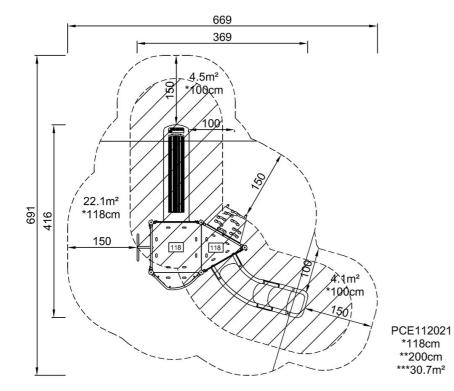



PCE112021

Click to see TOP VIEW

Click to see SIDE VIEW

5 / 08/15/2024