Fairy Tale Dog

M173



Item no. M17301-01P				
General Product Information				
Dimensions LxWxH	1'2"x3'1"x2'7"			
Age group	2 - 5			
Play capacity (users)	1			
Color options	•			





The Fairytale Dog is a hugely inviting springer which attracts and supports children's relentless play, again and again. The rocking sensation is a great movement response. Movement response is one of the greatest play sensations there are. Apart from the fun, this adds a feeling of control to the child's play. The responsive movement also trains the

understanding of cause and effect in young children: that actions have an effect on the world. Rocking the Fairytale Dog trains the child's sense of balance and space as well as hand and arm muscles when holding tight and pushing your feet hard into the foot support. All of these basic motor and muscle skills help train the child's bodily cognition, supporting

important life skills such as being able to sit still on a chair or navigate traffic securely.

Fairy Tale Dog

M173





Handhold Physical: the vertical handgrips ensure a firm grip at different heights, necessary for rocking intensely. This trains hand and arm muscles.





Theme Cognitive: suggests a theme and supports dramatic play, which stimulates language and communication skills.



Rocking spring

Physical: response to movement increases spatial awareness and sense of balance. These are fundamental motor skills that help the child's ability to sit still on a chair which takes a good sense of balance. Cognitive: trains the understanding of cause and effect: when I move my body, the spring responds with movement.



Foot support

Physical: a good footrest supports intense rocking. Rocking stimulates the senses of balance and space that are fundamental in managing the world securely. Intense rocking also develops coordination and muscle strength.



Eye Social-Emotional: the eye evokes emotions of empathy, encouraging children to look the animal in the eye.

Fairy Tale Dog











Panels of 19mm EcoCore[™]. EcoCore[™] is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of a core produced from 100% recycled material.

KOMPAN Springs are made of high quality spring steel according to EN10270. The springs are cleaned by phosphating before they are painted with an epoxy primer and a polyester powder coating as top finish. The springs are fixed by unique anti pinch fittings for maximum safety and long lifetime.

The springs are fixed by unique anti pinch fittings for maximum safety and long lifetime.

Item no. M17301-01P					
Installation Information					
Max. fall height		1'6"			
Safety surfacing area		156ft ²			
Total installation time		2.6			
Excavation volume	0.	25yd³			
Concrete volume		0yd³			
Footing depth (standard)		1'6"			
Shipment weight		64lbs			
Anchoring options	In-ground 🗸				
	Surface	~			
Warranty Information					
EcoCore HDPE	Lit	fetime			
Membrane	2	Years			
Spare Parts Availability	10	Years			
Springs	5	Years			



Handholds and footrests are made of injection moulded high quality nylon (PA6). PA6 has good wearing and impact strength.



Seat is made of a molded PP insert with an outer soft layer of TPE rubber. TPE rubber has good shock absorption and ensures durable solution.

Elevated activities 0	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	0	1	1
Required	0	1	1



Sustainability Data

Cradle to Gate A1-A3

M17301-01P

M173



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO, calculation of: Freestanding play equipment



Data version no. 2023-10-05

The CO, calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: GXY916012-3417.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

sund

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO, calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Total CO2

emission

kg CO₂e

70.90

CO2e/kg

kg CO₂e/kg

2.53

Recycled


materials

%


48.23








* Max fall height | ** Total height

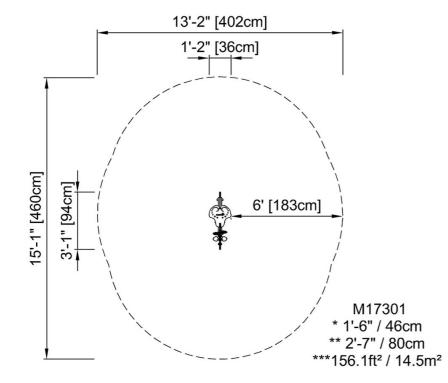

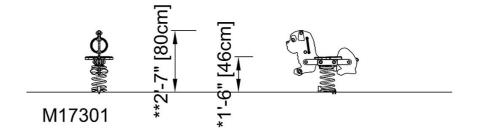

Click to see TOP VIEW

5 / 05/23/2024