
## **Agility Trail 3**

NR0862



Item no. NRO862-1001		
General Product Information		
Dimensions LxWxH	1366x148x240 cm	
Age group	6+	
Play capacity (users)	13	
Colour options		



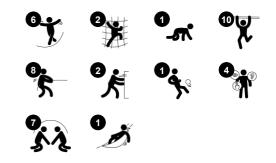

The Agility Trail 3 is a challenge that children of ages 6 to 12 will want to take on. The variation in hanging, crawling, and balancing activities will make children come back, again and again, to test their abilities while having fun! The activities exercise upper body strength, coordination, and balance. It is also a great course for confidence building, or simply

playing 'Don't touch the ground'. It is made of natural Robinia timber, which provides an organic structure that can either blend into or stand out from your surroundings. Children can touch and feel the timber while playing, observing how nature inspiration interacts with the built environment.





NR0862





Cave bridge Physical: crawling in the cave bridge net develops cross-body coordination, proprioception and spatial awareness. Social-Emotional: cooperation and socializing with others in and around the net, turn-taking.





Parallel bars Physical: parallel bar walking is a great way to engage the shoulders, chest, and arms through a challenging pushing movement.



#### Net crossing

**Physical:** cross coordination, spatial awareness and muscle strength are trained when climbing in the net. **Social-Emotional:** passing others when climbing through trains turn-taking skills and consideration.



Monkey bar Physical: the upper body muscles are developed immensely with coordination and trunk stability. This type of training is great for cross coordination



#### Balance beam

Physical: trains the sense of balance, fundamental for all other motor skills that makes it possible to navigate the world confidently and securely. Social-Emotional: turn-taking skills and negotiation when crossing each other on the beam. Room for a seated rest and exchange.

# Agility Trail 3





All organic Robinia products by KOMPAN are made of Robinia wood which is sourced from sustainable plantation farms. On request it can be supplied as FSC® Certified (FSC® C004450).



Nets and ropes are made of UV-stabilised PA with inner steel cable reinforcement. The rope is induction treated to create a strong connection between steel and rope, which leads to durable weather resistance.



Overhead climbing handles are made of highquality stainless steel. The handles are attached to the upper Robinia crossbeam by stainless steel hardware.

Item no.	NRO862-1001
----------	-------------

#### Installation Information

Max. fall height	189 cm
Safety surfacing area	61.1 m²
Total installation time	14.1
Excavation volume	1.51 m³
Concrete volume	0.91 m³
Footing depth (standard)	100 cm
Shipment weight	760 kg
Anchoring options	In-ground 🗸

Warranty Information		
Robinia Wood	15 years	
Ropes & Nets	10 years	
Spare Parts Guarantee	10 years	
Stainless Steel Components	Lifetime	
Stainless Steel Components	Lifetime	



The Robinia wood can be supplied as untreated raw wood or painted with a brown coloured transparent pigment that maintains the golden wood colour of the wood.



### **Sustainability Data**

Cradle to Gate A1-A3

NRO862-1001

NR0862



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



#### Verification of CO, calculation of: Nature play



Data version no. 2023-10-05

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Nature play" represented by item no.: NR0409-0621.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

#### mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO, calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



www.bureauveritas.dk



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Total CO2** 

emission

kg CO<sub>2</sub>e

205.37

CO2e/kg

kg CO<sub>2</sub>e/kg

0.34

Recycled

materials

%


3.04




NR0862

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

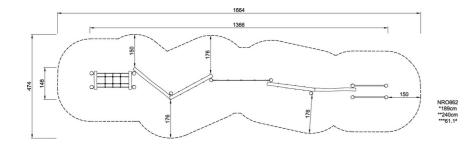



Click to see TOP VIEW

Click to see SIDE VIEW

5 / 10/12/2024

