KSW92008





Item no. KSW92008-0910

General Product Information

Dimensions LxWxH 10'6"x6'0"x8'4"

Age group 2 - 12

Play capacity (users) 6

Color options












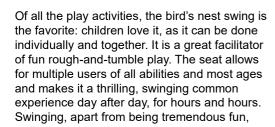

trains the children's ABCs: agility, balance and coordination, as well as their spatial awareness. These motor skills are crucial to being able to judge distance and navigate traffic safely. Swings allow for standing sitting, lying – and even jumping off. All these activities train the arm, leg and core muscles. Jumping off builds bone density – the majority of which

is built up during the first years of life. Finally, this swing supports social skills such as taking turns and cooperation.















Bird nest swing

Physical: develops balance, coordination and spatial awareness. The swinging movement trains the arm, leg and core muscles, and strengthens bone density when jumping off. Social-Emotional: the spacious seat allows for many children standing, lying, seated together and is inclusive for all. Cognitive: cause and effect understanding, rhythm and thinking skills are developed in younger children.



KSW92008



7'9"

4.5

495ft²

1.37yd3

 $0.76yd^3$

2'11'

435lbs

10 Years

In-ground



Vertical posts of hot dip galvanized steel or powder coated on pre-galvanized steel base. Swing frame end connectors and crossbeam of hot dip galvanized steel or powder coated on hot dip galvanized steel base.



KOMPAN heavy duty designed swing hangers of stainless steel with anti-twist function. The hangers are attached to the cross beam on a welded bracket with two bolts, The bearings are embedded with silicone lubricant and needs no further lubrication.



KOMPAN designed the bird's nest seats to be light in weight and in compliance with global safety standards. The soft, shock absorbent bumpers with non-slip surface makes the swing seat extremely user friendly. Choose between a rope version with reinforced PA rope or a molded PE version. Both equipped with soft rubber bumpers.



Warranty Information Chains 10 Years Spare Parts Availability 10 Years Steel post HDG Lifetime Swing hangers 5 Years

Item no. KSW92008-0910 Installation Information

Max. fall height

Safety surfacing area

Total installation time

Footing depth (standard)

Excavation volume

Concrete volume

Shipment weight

Anchoring options

Swing seat




The standard seats of KOMPAN swings is engineered for maximum safety and durability. The seat two component seat with a PP inner core and outside rubber is produced in one operation. The seats are available with swing chains of either hot dip galvanized steel or stainless steel for all swings heights.



The swing hangers are made of high quality UVstabalized nylon (PA6) housing with integrated lifetime sealed ball bearings. The height adjustable chains are fixed by a stainless steel hook with theft proof snake-eye bolt in a turn able anti twist housing. All seats with two chain fixation are available with either standard or anti-wrap suspension.



Unique designed seats for toddlers: Baby seat of rubber. Toddler seat of PUR with four chain suspension for easy movement. Cradle seat. You & Me swing seat for adult/child or children of different ages to swing together while facing each other.

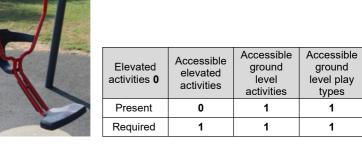



Sustainability Data

KSW92008





C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Freestanding play equipment



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: KSW92011-0910.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:



Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO_2 calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023





Cradle to Gate A1-A3	Total CO ₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
KSW92008-0910	566.76	3.57	42.78


The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))


KSW92008



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

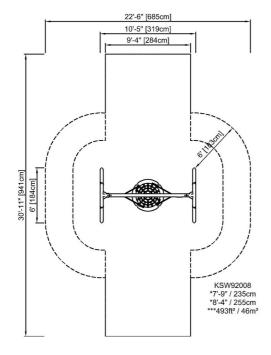

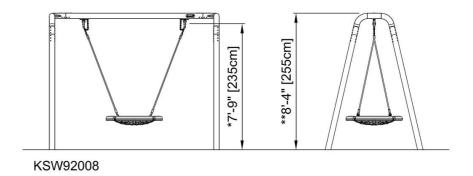

Click to see SIDE VIEW