
Super Combi 2

FSW249



The Super Combi 2 is a highly versatile structure. It has a perfect blend of high, low, and dynamic items. The overhead activities include the snake bar, the overhead ladder, and the rings. The climbing rope and the target shoot are fun and functional, and the Mag Bells provide dynamic strength training. The universal parallel bars stimulate exercise creativity and can be used directly by wheelchair users. The integrated step platforms can be used for strength, jumping, and cardio —an excellent setup for more extensive group workouts.

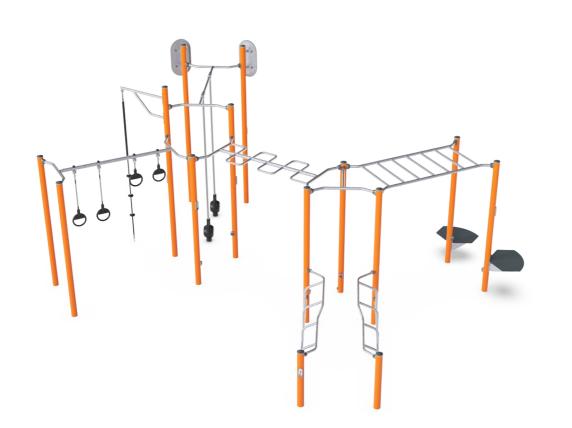

Item no. FSW24900-0901				
General Product Information				
Dimensions LxWxH	700x746x325 cm			
Age group	13+			
Play capacity (users)	14			
Color options				





Super Combi 2

FSW249



10 years







Post are made of Ø101.6 x 2mm, pre-
galvanized carbon steel and powder coated, a
great protection to all conditions.

The snake ladder is made of hot-dip galvanized s235 steel with the following dimensions Ø38 x 4mm. The steel surfaces are hot dip galvanised inside and outside with lead free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.

The uniquely designed Magnetic Bells are made of PUR and a reinforced aluminium steel frame that ensures a strong design. The ergonomically shaped handles guarantee a good and pleasant grip for all users.

Installation Information				
Max. fall height	20	00 cm		
Safety surfacing area	65	5.7 m²		
Total installation time		14.2		
Excavation volume	1.	14 m³		
Concrete volume	0.	68 m³		
Footing depth (standard)	ę	90 cm		
Shipment weight	8	99 kg		
Anchoring options	In-ground	~		
	Surface	~		
Warranty Information				
EcoCore HDPE	Lif	etime		
Movable parts	2	years		
PUR components	10	years		
Spare parts guaranteed	10	years		

Item no. FSW24900-0901



The top plate for the jumping platform is made of Ekogrip® panels that consist of a 15 mm polyethylene bottom layer, with a 3 mm top-layer of thermoplastic rubber with a non-skid effect for safe jumping exercises under all-weather circumstances.



The plate for the target is made from 19mm EcoCore™ HDPE that consists of +95% recycled post-consumer material from e.g., food packing waste in both core and colorful outer layer. The Dip-Station is designed with inclusive in mind, allowing wheelchair users to access the bars at either end. The two bars are placed at two different widths and heights – one narrow and high and one wide and low to allow for training of different individuals and muscle groups.



Steel

Sustainability Data

FSW249




Cradle to Gate A1-A3	Total CO₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
FSW24900-0901	1,370.38	2.42	57.87

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark







Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Fitness" represented by item no.: FAZ10100-0900.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



Data is subject to change without prior notice.

+45 7731 1000

By Bureau Veritas HSE

www.bureauveritas.dk



FSW249






700 39.4m² *133cm 60 1053 746 50 14.3m² *200cm B FSW24900 *200cm **325cm ***65.7m²

* Max fall height | ** Total height | *** Safety surfacing area

989

* Max fall height | ** Total height

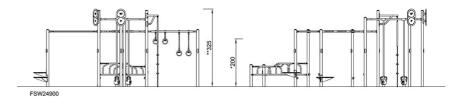

Click to see TOP VIEW

4 / 02/07/2025