Bootcamp Base


FST930





The Bootcamp Base gives trainers every opportunity they need to do their training. It is a multipurpose gym where you can easily train with groups of more than 10 people. The Bootcamp Base allows users to stow barbells at various heights and to attach boxing bags and many other training equipment (suspension trainers, climbing ropes, battle

ropes, elasticated attachments etc.).

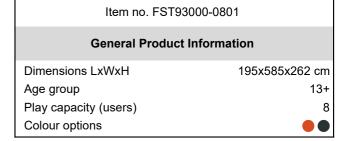



Bootcamp Base

FST930



Lifetime



The pull up bars are 180 cm long and have a diameter of 32 mm. The bar is hot-dip galvanised, and the surface is powder-coated. This provides a smooth service and allows users to perform dynamic exercises without getting injuries.



The post for the bootcamp base is 80x80x3mm and is made from hot-dip galvanised which makes the posts structurally sound and almost unbreakable.



This is called a J-Hook, you can adjust them to set up the bar at the right height for each of your lifts. KOMPAN J-hooks are heavy duty and fit securely in place so you can focus on your workout without having to worry about hook slippage or movement. They are hot galvanized and can resist all weather conditions.

Item no. FST93000-0801			
Installation Information			
Max. fall height	1	50 cm	
Safety surfacing area	3	8.4 m²	
Total installation time		9.6	
Excavation volume	1	.60 m³	
Concrete volume	0	.78 m³	
Footing depth (standard)		80 cm	
Shipment weight	6	659 kg	
Anchoring options	In-ground	•	
	Surface	>	
Warranty Information			
Coated Steel Parts	10 years		

Galvanised Steel



All of KOMPAN's fitness products are compliant with AS 4685:2021, ASTM F3101 & EN16630 Outdoor Fitness Standards. Load tests are performed to the specified load of 78kg per user. A product intended for one user is loaded with 420kg.



One of the cool opportunities the FST930 offers is the opportunity to add a boxing bag to the structure. All the hardware is in place to click on your boxing bag and start working out!The bolts and connectors are made from stainless steel and extremely durable.

Sustainability Data

FST930





Cradle to Gate A1-A3	Total CO ₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
FST93000-0801	1,340.34	2.59	49.94

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Fitness



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Fitness" represented by item no.: FAZ10100-0900.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

misiE

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of ${\rm CO_2}$ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000




Bootcamp Base


FST930



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

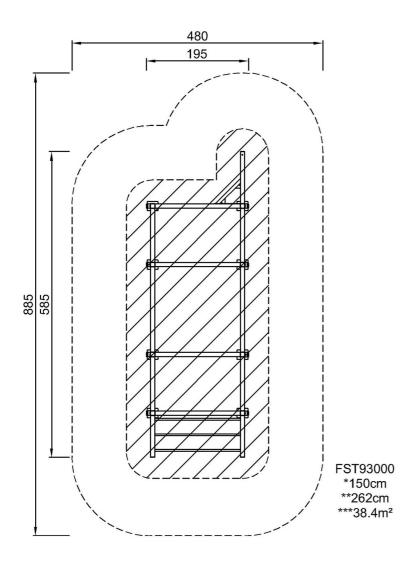

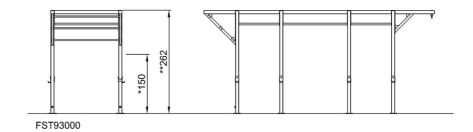

Click to see TOP VIEW

Click to see SIDE VIEW