


# Cubite with add-ons



COR10503

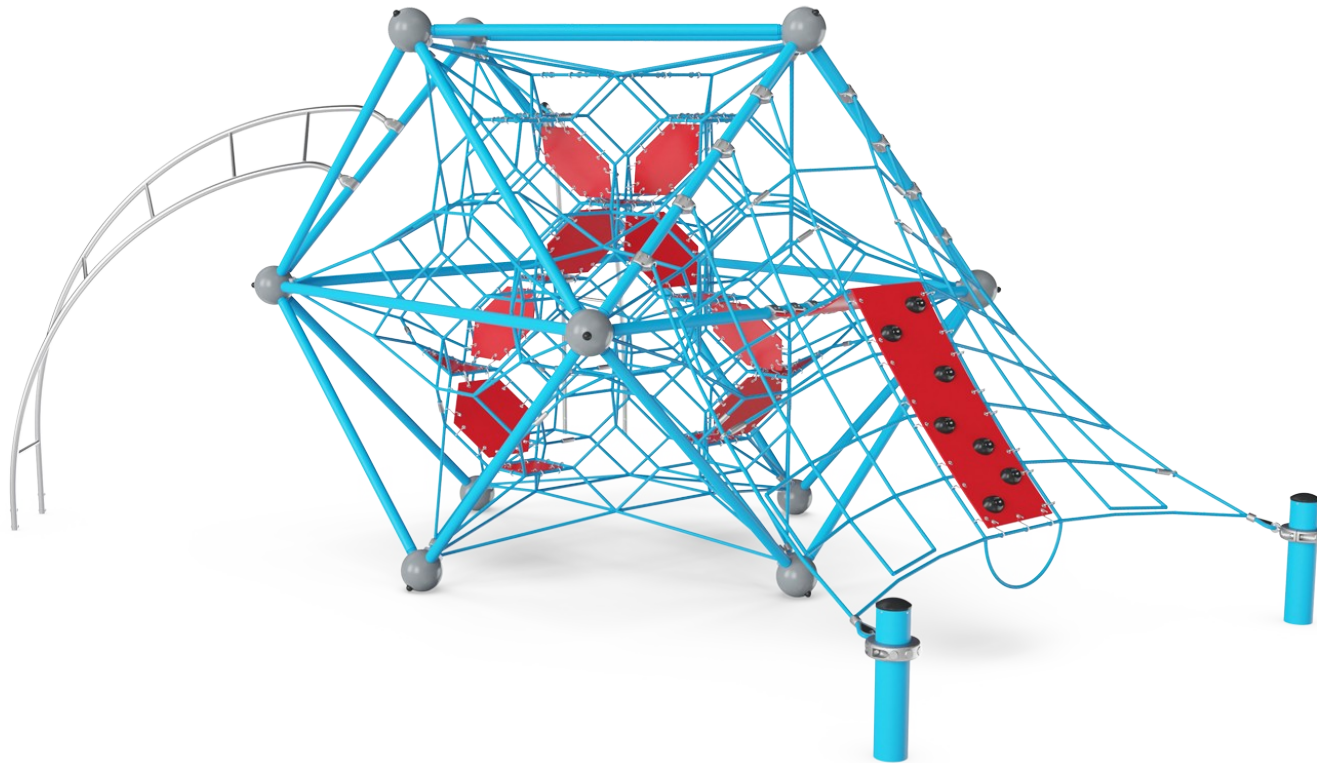

Item no. COR105031-0412

## General Product Information

Dimensions LxWxH	722x722x300 cm
Age group	5+
Play capacity (users)	42
Color options	

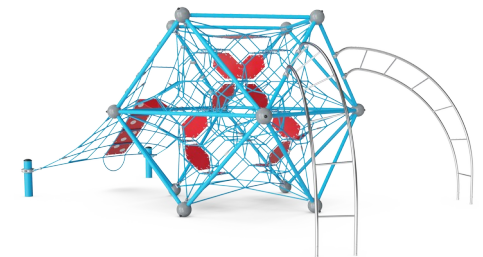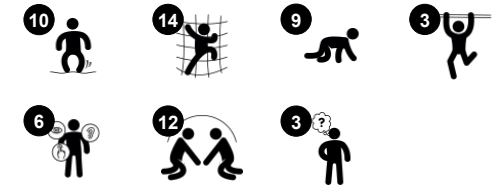

The Cubite with Add-Ons is an immense three-dimensional rope environment that thrills children again and again. The variety in climbing ensures hours of play: the bouncy interconnected ropes of the Cubite add thrill, the child can feel its own and all their friends movements when climbing. At this height that means risk assessment and concentration. The

twisted Jacob's ladders are a challenge, when on the 2nd step, the child needs to use all of its movement logic to master climbing onwards. The steel frame is a destination in its own right, offering a break or a meeting point. The membranes add a fast, bouncy way to the top and function as destination and meeting points at the same time. Social interaction and

stimulation of cooperation is encouraged here. The bouncy climbing membrane adds variation in climbing. And all is transparent facilitating communication across the net.

# Cubite with add-ons


COR10503



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope climbing structures.



The aluminium swages of the net are double conical with rounded ends and are as small as safety allows. The overall net design aims at keeping metal parts within the net to an absolute minimum, both in size and number, in order to provide the best possible rope climbing experience.

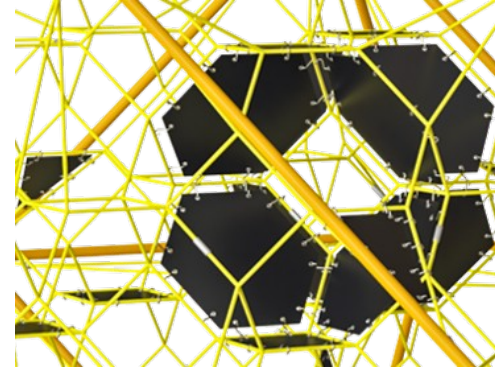


Corocord membranes consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armouring made of woven polyester. The armouring and the two surface layers result in a total thickness of 7.5 mm.

Item no. COR105031-0412	
Installation Information	
Max. fall height	300 cm
Safety surfacing area	64.0 m <sup>2</sup>
Total installation time	30.0
Excavation volume	4.10 m <sup>3</sup>
Concrete volume	2.46 m <sup>3</sup>
Footing depth (standard)	110 cm
Shipment weight	1,066 kg
Anchoring options	In-ground ✓



The metal parts are made of high quality steel, hot dip galvanised inside and outside with leadfree zinc. On the outside, there is an additional layer of powder coating. This ensures both excellent corrosion resistance and colourful design expression.

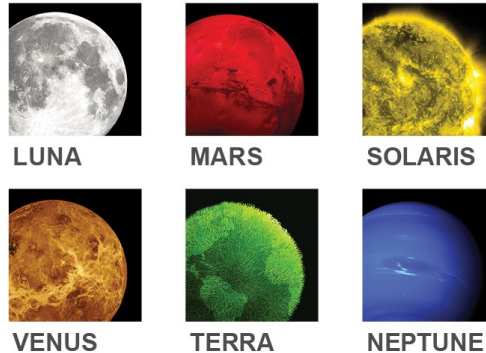


The COROCORD Frame Nets are available in 6 galactic colour themes. The themes draw on bright colours that appeal to children of all ages. Can be changed in the configurator.



# Sustainability Data

COR10503

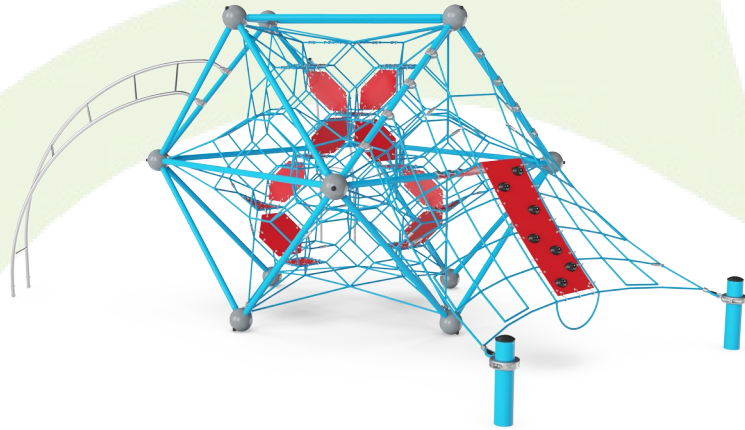

Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO <sub>2</sub> e/kg	Recycled materials
	kg CO <sub>2</sub> e	kg CO <sub>2</sub> e/kg	%
<b>COR105031-0412</b>	2,656.90	3.78	38.80

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Kompan A/S**  
 C.F. Tietgens Boulevard 32C  
 DK-5220 Odense SØ  
 Denmark



## Verification of CO<sub>2</sub> calculation of: Corocord



Data version no. 2023-10-05

The CO<sub>2</sub> calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

**Date: 30. October 2023 | Valid until: 30. October 2025**

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

**Publication date: 30. October 2023**

By Bureau Veritas HSE  
 www.bureauveritas.dk  
 +45 7731 1000





# Cubite with add-ons

COR10503

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

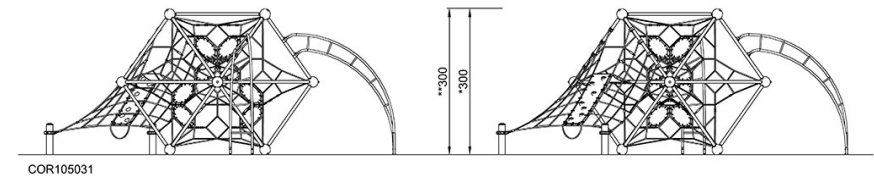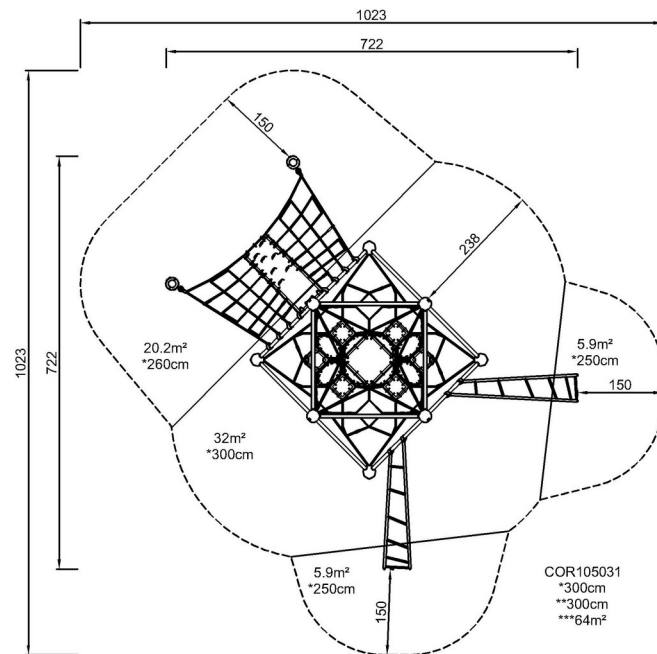

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)