Scooter Carousel

PCM160



Item no. PCM160-0901				
General Product Information				
Dimensions LxWxH	2'7"x2'7"x3'1"			
Age group	5 - 12			
Play capacity (users)	3			
Color options				



WOW! The Scooter Carousel makes children squeal with joy: It rotates, tickles the stomach and is spacious enough for a few friends, too. The social appeal for children is evident: you can be active, and close together. This trains empathy, cooperation and turn-taking skills. The physical play and training in spinning is the main fun factor. The rotation point is at the center allowing the children to adjust the spinning speed by pushing or pulling themselves into motion. This trains the logical thinking: speeding up by leaning into the center or slowing down by leaning out from it. The rotation trains the sense of balance which is fundamental for all other skills. A well-trained sense of balance helps children to navigate the world securely, e.g. preventing falls when playing actively. The pushing and running help develop children's arm and leg muscles and cardio, while jumping on and off the Scooter Carousel builds bone density.

1 / 05/23/2024

Scooter Carousel

PCM160







Scooter Carousel

Physical: the sense of balance and coordination are supported when spinning, effecting the ability to sit still. Muscles are developed when pushing or pulling friends. Can be turned by own body movements or with help. Social-Emotional: cooperation, helping others, turn-taking. Cognitive: logical thinking when speeding up or slowing down the spin by either curling up or stretching.



Handhold

Physical: the possibility of holding onto more of the handhold ensures a good grip, necessary for spinning intensely. This trains the hand and arm muscles.

Scooter Carousel



10 Years

10 Years

PCM160



Posts are made of high quality galvanized steel with optional powder coated top finish. The galvanization has excellent corrosion resistance in outside environments and requires low maintenance.



The upper round handle is made with a galvanized steel insert and covered with soft PUR rubber with groves that ensures good handhold while rocking.



Heavy duty engineered bearing system with two single row deep groove high quality ball bearings with rubber seals. The fully closed bearing construction is lifetime lubricated and located above ground.

Item no. PCM160-0901					
Installation Information					
Max. fall height		1'8"			
Safety surfacing area		168ft ²			
Total installation time		2.5			
Excavation volume	0.5	58yd³			
Concrete volume	0.3	33yd³			
Footing depth (standard)		2'11"			
Shipment weight	3	00lbs			
Anchoring options	Surface	~			
	In-ground	~			
Warranty Information					
EcoCore HDPE	Life	etime			
HPL	15 Years				
Post	10 Years				



All decks are made of High Pressure Laminate HPL with a thickness 17.8mm and non skid surface texture according to EN 438-6. KOMPAN HPL has high wearing strength to ensure long lifetime in all climates.



Panels of 19mm EcoCore[™]. EcoCore[™] is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of a core produced from 100% recycled material.

Elevated activities 0	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	0	1	1
Required	0	0	0



PUR components

Spare Parts Availability

Sustainability Data

Cradle to Gate A1-A3

PCM160-0901

PCM160



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO, calculation of: Freestanding play equipment



Data version no. 2023-10-05

The CO, calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: GXY916012-3417.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO, calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



www.bureauveritas.dk



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Total CO2

emission

kg CO₂e

209.51

CO2e/kg

kg CO₂e/kg

2.56

Recycled


materials

%

43.52





PCM160



KOMPAN Let's play

* Max fall height | ** Total height

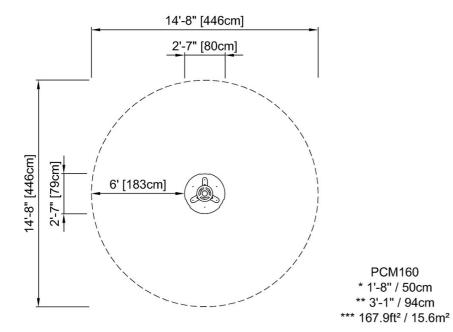

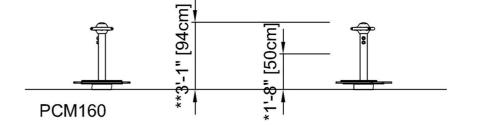

Click to see TOP VIEW

Click to see SIDE VIEW

5 / 05/23/2024