
COR30281



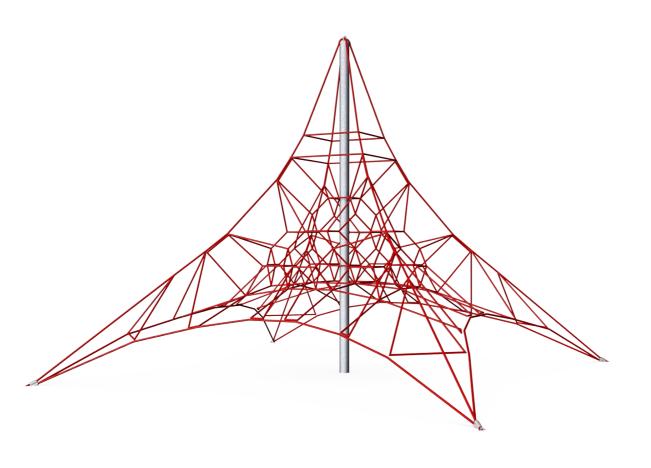


The Mini Spacenet is a bouncy, transparent play structure that encourages children to climb to the top. The feeling of achievement when having climbed to the top is phenomenal trying different routes each time in a fun but challenging way. The Mini Spacenet trains motor skills' ABC: Agility, Balance and Coordination. Major muscle groups are used

when children climb, including; arms push and pull, legs push and the core provides stability.

Item no. COR302811-1101				
General Product Information				
Dimensions LxWxH	504x504x393 cm			
Age group	3+			
Play capacity (users)	24			
Colour options				





COR30281








Mast

Physical: the slightly swaying mast stimulates children's muscles and motor skills when they hold tight climbing the net. Social-Emotional: children develop courage and self-regulation when climbing up high. This positively affects self-confidence.

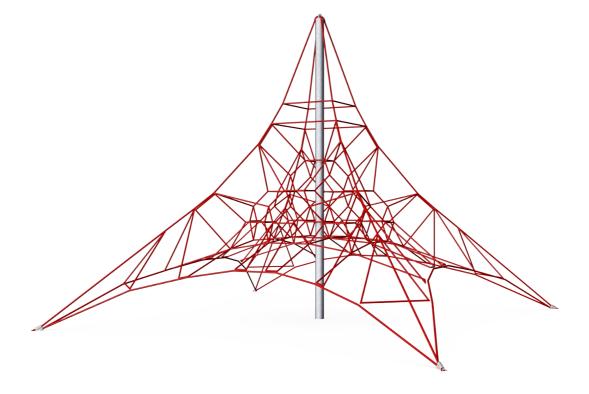



### Sturdy, lower rungs

Physical: the stiff bounce of the lower rung supports balance and coordination as well as strengthens bone density when jumping down. Social-Emotional: great meeting point allowing socialising.







### Highest rungs

Physical: spatial awareness is supported, arm muscles when holding tight. Social-Emotional: children develop courage, self-confidence, consideration and turn-taking, all important life skills.











### **Bouncy net meshes**

Physical: agility, balance and coordination as well as spatial awareness are supported when bouncing, climbing and sitting in the net.

Social-Emotional: the bouncing, swaying net appeals to empathy and cooperation.

Cognitive: physical memory, logical thinking, concentration.



### Transparency

Social-Emotional: the transparency makes cooperation and communication possible, which are essential life skills for children to learn.





#### Big meshes

Physical: the big meshes allow for climbing and crawling, supporting proprioception, cross coordination and spatial awareness. Social-Emotional: allow more children being seated together, sharing.

COR30281





Corocord ropes with 19mm+ diameter are known as a 'Hercules' rope type which is formed from galvanised six-stranded steel wires. Each strand is tightly wrapped with PES yarn, which is melted onto each individual strand. Ropes are highly wear-and vandalism-resistant and can be easily replaced on-site if needed.



Designed to allow the typical function of rope play structures to move Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector. Our clamps are safe, durable and vandalism-proof.



Safety is at the forefront of our designer's minds. That's why our spacenets' main bearing ropes are equipped with an additional safety feature. Should the main connections point fail, we have included an additional safety rope which prevents the structure from collapsing.



Installation Information				
Max. fall height	120 cn			
Safety surfacing area	59.7 m			
Total installation time	11.0			
Excavation volume	5.10 m			
Concrete volume	3.25 m			
Footing depth (standard)	110 cn			
Shipment weight	438 kg			
Anchoring options	In-ground •			

Item no. COR302811-1101

Warranty Information	
Corocord (Hercules) Rope	10 years
Membrane	2 years
S-Clamps	10 years
Spare Parts Guarantee	10 years
Steel post HDG	Lifetime



Corocord membranes consist of friction-proof rubberised material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armouring made of woven polyester. The armouring and the two surface layers result in a total thickness of 7.5 mm.



In the centre of the net is the mast which is made of high-quality seamless steel and creates an oscillating support structure which is statically favourable and equalises the oscillations in the net. The masts are hot-dip galvanised as standard, with the design option of additional powder coating.




For installations using rubber surfacing the turnbuckle protectors are to be ordered separately.

**AS** 4685 compliant

# **Sustainability Data**

COR30281



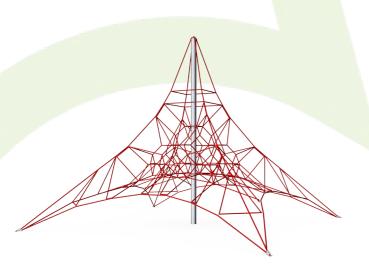

Cradle to Gate A1-A3	Total CO₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
COR302811-1101	994.36	3.08	53.50

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

### Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



### Verification of CO<sub>2</sub> calculation of: Corocord



Data version no. 2023-10-05

The  $\mathrm{CO}_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.:  $\mathrm{COR314011}$ -1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of  $CO_2$  calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000





COR30281

KOMPAN Let's play

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

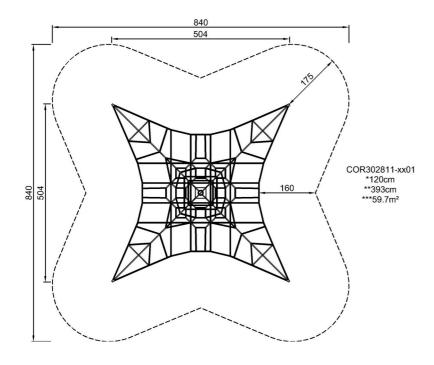

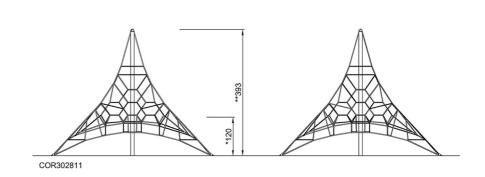

Attention! Foundation anchor blocks exceeds safety zone area. See installation instructions.