GXY957



5 - 12



Item no. GXY957000-3817

General Product Information

Dimensions LxWxH 10'4"x1'4"x8'4"

Age group

Play capacity (users) 2

Color options





The immense spin invitation of the Saturn Carousel is enough to make any child's head turn: this needs to be tested now. And then again, and again. There is nothing like spinning to keep play going. On Saturn, seats and grips provide great holds for being seated, standing – or both, more together on one seat. Apart from being great fun, spinning the Saturn

Caroussel trains motor skills such as sense of balance and space. Those are both important for judging distances, speed and objects in space. This is crucial e.g. for managing traffic safely. The spinning trains Arm, leg and core muscles. Bone density is built when jumping off. When pushing and pulling friends around, the cardio gets trained intensely. The two seats

encourage group play and cooperation, training important social-emotional skills such as empathy, turn-taking and cooperation.

GXY957





PUR covered rope Physical: firm grip when spinning and hanging from arms. Arm muscles developed when holding tight.







Physical: develops upper body muscles, as when pulling yourself up or hanging in your arms.







Rotation

Physical: pushing or pulling into motion, children use their muscle strength and their cardio. The rotation develops the sense of balance and space when enjoying the ride. Social-Emotional: listening and negotiating how slow or fast to go, children develop empathy and cooperation skills.







Dino seat

Physical: the three divisions and chains of the seat provide efficient handholds for both standing and seated swinging. Social-Emotional: the possibility of children swinging together, legs hanging down, trains cooperation, sequencing and turn-taking when swinging.

GXY957



10 Years

10 Years



Saturn ropes has six-stranded steel wires and a steel wire core. Each strand is tightly wrapped with PES yarn, which is melted onto each individual strand. After initial friction has removed the surface fibers, a harder PES coating remains to protect each strand, making the ropes highly wear- and vandalism-resistant.



The special designed seat is made of a stainless-steel insert covered with a soft layer of PUR rubber. The seat is impact tested to fulfill all global playground standards and the rope has an ergonomic handhold of a 100cm long molded on PUR rubber handle.



The two angled top handles are made of a molded PP insert with an outer soft layer of TPV rubber. The handle is attached to the pipe with a galvanized steel inlay to ensure strength and durability.



Installation Information				
Max. fall height		7'1"		
Safety surfacing area	1	112ft²		
Total installation time		3.0		
Excavation volume	1.	57yd³		
Concrete volume	1.	05yd³		
Footing depth (standard)		3'11"		
Shipment weight	3	74lbs		
Anchoring options	In-ground ✓			
	Surface	~		
Warranty Information				
Bearing construction	5	Years		
Hot dip galvanized steel	Lifetime			
PUR components	10	Years		

Item no. GXY957000-3817



The steel surfaces are hot-dip galvanized inside and outside with lead-free zinc. The galvanization has excellent corrosion resistance in outside environments and requires minimal maintenance.



Heavy duty engineered bearing system with single row deep groove ball bearings with rubber seals. The fully closed bearing construction is lifetime lubricated and maintenance free.

Elevated activities 0	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	0	1	1
Required	0	1	1



Ropes & nets

Spare Parts Availability

Sustainability Data

GXY957





C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO₂ calculation of: Freestanding play equipment



Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: $\mathrm{GXY916012\text{-}3417}$.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:




Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO_2 calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



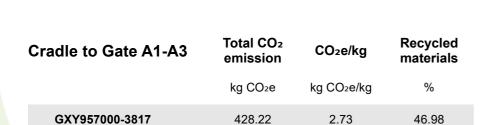


The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))


GXY957



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

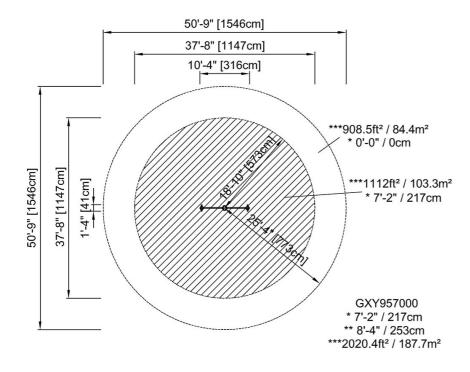

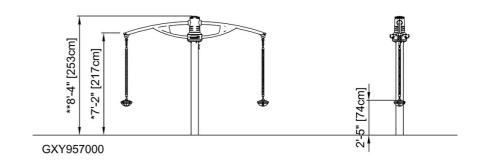

Click to see TOP VIEW

Click to see SIDE VIEW