

Train Coupling

M529



Item no. M52900-3317P

General Product Information

Dimensions LxWxH	55x55x28 cm
Age group	2+
Play capacity (users)	1
Colour options	●



The Coupling “connects” the Steam Engine with the Railway Carriage, and/or simply functions as a place to sit.



Train Coupling

M529



The steel surfaces are hot dip galvanised inside and outside with lead free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.



The steps are made of High Pressure Laminate HPL with a thickness 17,8mm and non skid surface texture according to EN 438-6. KOMPAN HPL has high wearing strength to ensure long lifetime in all climates.

Item no. M52900-3317P	
Installation Information	
Max. fall height	28 cm
Safety surfacing area	9.9 m ²
Total installation time	1.4
Excavation volume	0.11 m ³
Concrete volume	0.00 m ³
Footing depth (standard)	47 cm
Shipment weight	16 kg
Anchoring options	In-ground ✓ Surface ✓
Warranty Information	
Hot dip galvanised steel	Lifetime
HPL seat	15 years
Spare parts guaranteed	10 years



Sustainability Data

M529



Cradle to Gate A1-A3	Total CO₂ emission	CO₂e/kg	Recycled materials
	kg CO ₂ e	kg CO ₂ e/kg	%
M52900-3317P	34.69	2.40	18.22


The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Train Coupling


M529

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

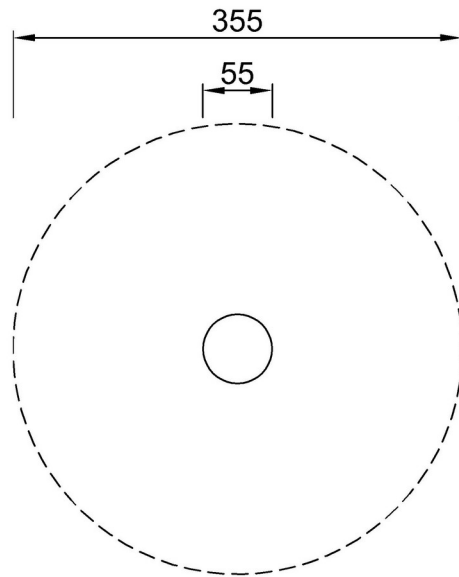

M52900P
*28cm
**28cm
***9.9m²

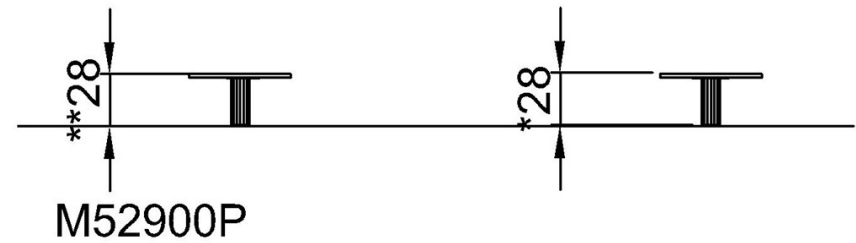

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)