

Jellyfish


COR29400



Item no. COR294001-1102

General Product Information

Dimensions LxWxH	717x595x445 cm
Age group	5+
Play capacity (users)	18
Color options	

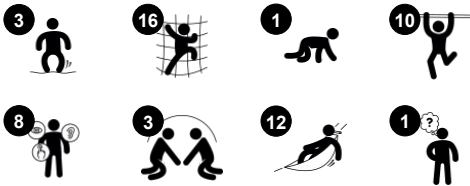

WOW! That's the reaction of children when they see and play on the Jellyfish, a transparent landmark with tentacles around its edges! The Jellyfish is guaranteed to deliver an unusually fun and challenging climbing experience. The transparent design gives a good view both from the outside and from the inside. Muscle strength, balance and cross-

coordination are trained when children climb the greatly varied entries into the platform: bouncing nets with or without climbing cleats, sturdy poles and rope ladders with bouncy rubber membranes. The spacious platform inside the Jellyfish is an excellent meeting point for groups of children. The tilted floor makes it fun, as children need to adjust their muscle


tension to stay in balance. Social-emotional skills such as self regulation are trained in the Jellyfish.



Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand. The ropes are highly wear-and vandalism-resistant and can be replaced at site if needed.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.

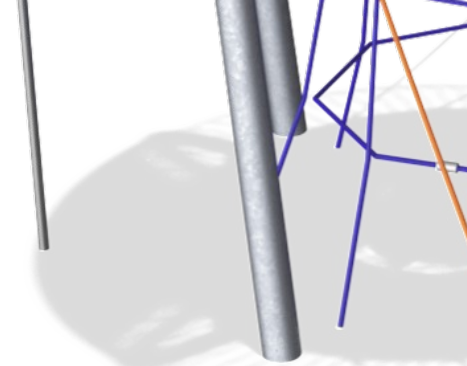


The steel posts are hot dip galvanised inside and outside with lead free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.


Item no. COR294001-1102	
Installation Information	
Max. fall height	245 cm
Safety surfacing area	64.0 m ²
Total installation time	68.6
Excavation volume	13.83 m ³
Concrete volume	8.10 m ³
Footing depth (standard)	110 cm
Shipment weight	1,240 kg
Anchoring options	<div>Surface ✓</div> <div>In-ground ✓</div>



Corocord membranes consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armouring made of woven polyester. The armouring and the two surface layers result in a total thickness of 7.5 mm.

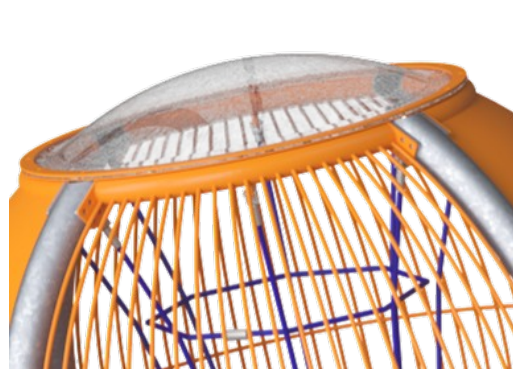

A transparent PC bubble covers the top of the Jellyfish, allowing children to observe the sky.

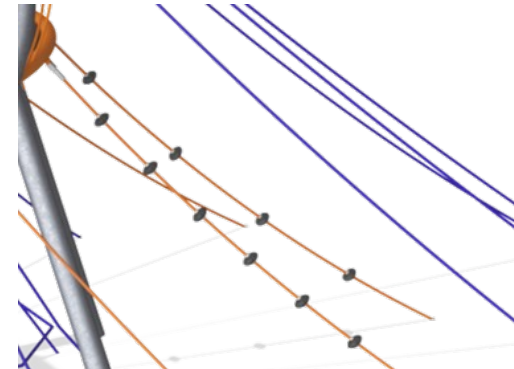


Jellyfish ropes are equipped with small black EPDM ufos, which can be used as support for hands and feet when climbing the rope.



Sustainability Data

COR29400

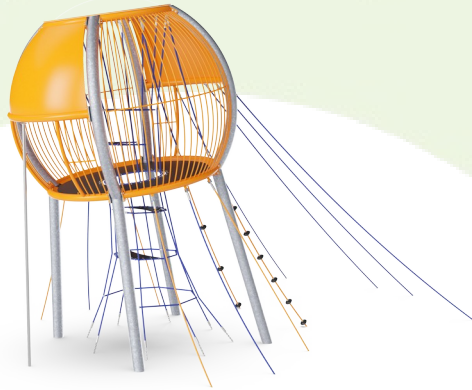

Cradle to Gate A1-A3	Total CO ₂ emission	CO ₂ e/kg	Recycled materials
	kg CO ₂ e	kg CO ₂ e/kg	%
COR294001-1102	2,449.40	2.80	45.10

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S

C.F. Tietgens Boulevard 32C
DK-5220 Odense SØ
Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.



Publication date: 30. October 2023

By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

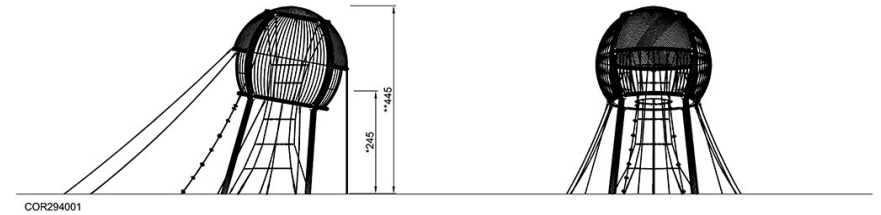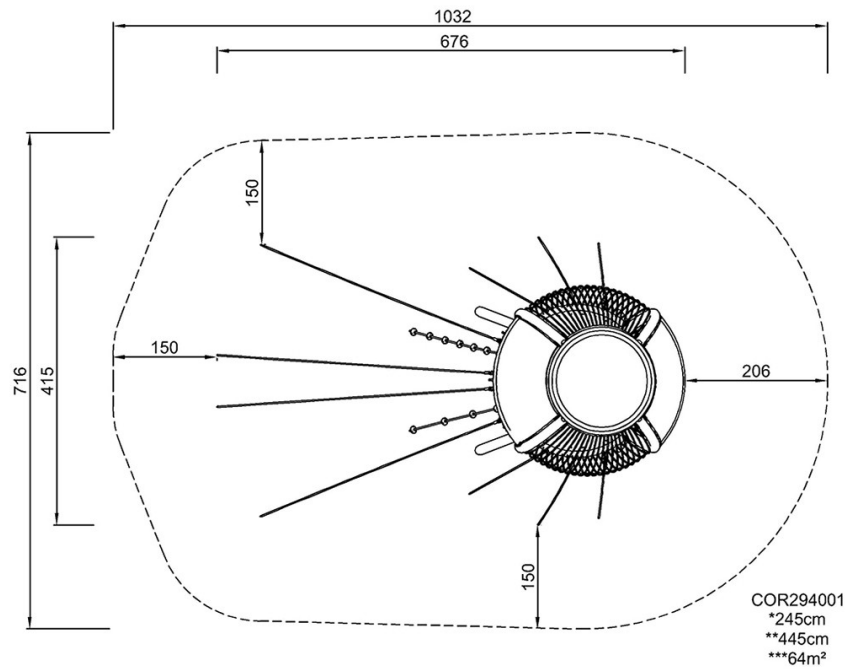

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)