

PCM155





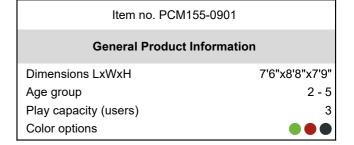

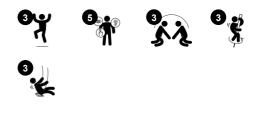

The 3-Seater Carousel adds spinning to swinging, making for a thrilling swing experience that attracts children repeatedly. The soft rubber seats invite both lying and seated positions. This allows for beginners as well as elevated level players. Apart from being irresistibly funny, the spinning and swinging movements train the sense of balance and

space. These are crucial motor skills, important for all other physical skills, and eventually for concentration skills for learning. To toddlers, swinging trains their sense of space as well as their focal tracking. The seated position in swinging trains the core muscles. When children jump off it builds their bone density. Socially, the three similar seats encourage

parallel play for toddlers, and cooperation for preschoolers, both important social skills.



PCM155









#### Rotation

Physical: pushing or pulling into motion, children use their muscle strength and their cardio. The rotation develops the sense of balance and space when enjoying the ride. Social-Emotional: listening and negotiating how slow or fast to go, children develop empathy and cooperation skills.






**Triple seating Social-Emotional:** stimulates parallel play and cooperation, important for social skills.



Low, rubber swing seat
Physical: support for pushing with feet,
developing leg muscles and sense of balance,
coordination, as well as spatial awareness.
Social-Emotional: self-confidence is fostered
from being able to do it yourself. Cognitive:
understanding of cause and effect.

PCM155



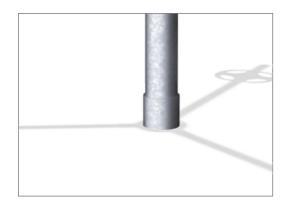

The carousel has different anchoring options for both surface and in-ground installation. All footings are hot dip galvanized inside and outside to ensure long lifetime of the product.




The seat hangers are made of high quality UVstabilized nylon (PA6) housing with integrated lifetime sealed ball bearings. The chains are fixed by a stainless steel hook with theft proof snake-eye bolt in a turn able anti twist housing.



Center post is hot-dip galvanized in dimension  $\emptyset$ 159 x 4 mm. Horizontal beams are hot-dip galvanized and powder coated in dimension  $\emptyset$ 76,1 x 3,6 mm.

	Item no. PCM155-	-0901			
Installation Information					
Max	κ. fall height		4'11"		
Safe	ety surfacing area		795ft²		
Tota	al installation time		3.8		
Exc	avation volume	0.	.65yd³		
Cor	crete volume	0.	.38yd³		
Foo	ting depth (standard)		3'3"		
Shi	oment weight	4	173lbs		
And	horing options	In-ground	~		
		Surface	~		
Warranty Information					

	Surface	~
Warranty Inforn	nation	
Chains	10 Ye	ars
Hot dip galvanized steel	Lifet	ime
Spare Parts Availability	10 Ye	ars
Swing hangers	5 Ye	ars
Swing seat	10 Ye	ars
	Chains Hot dip galvanized steel Spare Parts Availability Swing hangers	Warranty Information  Chains 10 Ye  Hot dip galvanized steel Lifet  Spare Parts Availability 10 Ye  Swing hangers 5 Ye

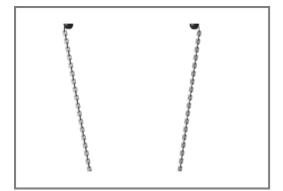

Chains are stainless steel and meet the requirements in ISO1434 -ISO1435 and DIN766.



The baby/toddler seat and suspension hinges are made of soft rubber (TPV). Polypropylene (PP) inside baby basket provides low friction leg openings for easy access (toddler in/out).



Belt seat is made of PUR. All components retain their properties in the temperature range of - 30°C to 60°C. All materials are stabilized to a maximum without use of heavy metal stabilizers.

Elevated activities 0	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	0	1	1
Required	0	1	1



# **Sustainability Data**

PCM155





C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



#### Verification of CO<sub>2</sub> calculation of: Freestanding play equipment



Data version no. 2023-10-05

The  $\mathrm{CO}_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: GXY916012-3417.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:



Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of  $CO_2$  calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023





Cradle to Gate A1-A3	dle to Gate A1-A3  Total CO <sub>2</sub> emission  CO <sub>2</sub> e		Recycled materials
	kg CO₂e	kg CO₂e/kg	%
PCM155-0901	439.65	3.19	44.87


The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

PCM155




\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

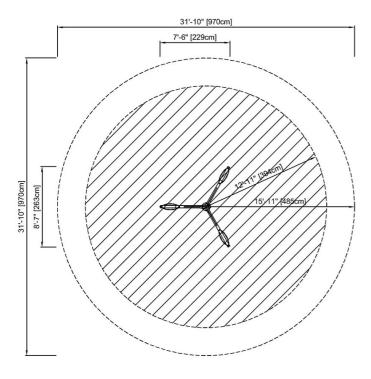

PCM155 \* 4'-11" / 150cm \*\* 7'-9" / 236cm \*\*\* 795.5ft² / 73.9m²

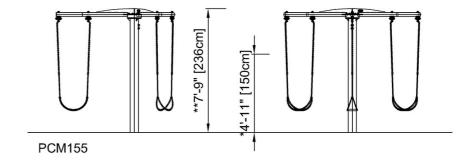

Click to see TOP VIEW

Click to see SIDE VIEW