
Triple Play Tower with Bridge

PCM300531





Item no. PCM300531-0603				
General Product Information				
Dimensions LxWxH	13'6"x18'0"x6'11"			
Age group	2 - 5			
Play capacity (users)	29			
Color options				





The Triple Play Tower with Bridge has a brilliant variety of play activities. This ensures hours and hours of play. The slide tower allows for a fast loop between stairs and slide which is immense fun, and also trains the sense of balance. For further thrill, the suspension bridge responds to the child's movement, training balance and spatial awareness. These motor skills are fundamental for managing the world confidently, e.g. in street traffic. The transparent design of the play unit ensures that children can play from the inside and the outside of the triple play tower. The varied play panels invite exploration and stimulate logical thinking. The conveyor desk panels as well as the gearing wheel panel invite cooperation and turn-taking, stimulating children's socialemotional and cognitive skills. The overall openness in design allows for all children to play and make friends.

Triple Play Tower with Bridge

PCM300531





Slide

Physical: sliding develops spatial awareness and a sense of balance. Furthermore, the core muscles are trained when sitting upright going down. Social-Emotional: empathy stimulated by turn-taking. Cognitive: young children develop their understanding of space, speed and distances when sliding down quickly.





Gearshift panel

Social-Emotional: cooperation, turn-taking, sharing. Cognitive: suggests a theme and supports dramatic play, which stimulates language skills. Communication skills when explaining functionalities. Creative: changing the position of the gear, leaving your mark.



Trekking bridge

Physical: the wobbly bridge trains balance and coordination as well as spatial awareness when children cross the bridge by running or jumping. Social-Emotional: turn-taking and consideration when passing each other. Cooperation and socializing with others in and around the bridge.



Desk with conveyor belt

Physical: tactile stimulation from running hands over rolling spheres on conveyor belt. Social-Emotional: sharing and cooperation from both sides create a social scenario that supports communication and cooperation. Cognitive: supports dramatic play scenarios, trains cause and effect understanding.



Gear wheels

Social-Emotional: cooperation skills and taking turns are developed when turning the gearing wheel. Cognitive: cause and effect understanding, and logical thinking are supported.



Flower panel

Social-Emotional: invites cooperation with two sides and provides for parallel play. Cognitive: suggests a theme and supports dramatic play, which stimulates language and communication skills.




Sand scoops panel

Physical: hand eye coordination and pushpull movements. Social-Emotional: invites cooperation with two sides and provides for parallel play. Cognitive: logical thinking: cause and effect understanding when running scoops in grooves or shifting materials from scoop to scoop. Creative: shifting scoops, creating new scoop positions.

Triple Play Tower with Bridge



PCM300531



Panels are available in two different materials: 19 mm EcoCore™ HDPE or impregnated and brown painted pine wood. EcoCore™ is a highly durable, ecofriendly material, which is not only recyclable after use, but also consists of a core produced from 100% recycled material. Pine wood boards are embedded in stainless steel frames.



Main posts with hot-dip galvanized steel footing are available in different materials: Pressure impregnated pinewood posts. Pre-galvanized inside and outside with powder-coated top finish steel posts. Lead-free aluminum with color anodized top finish. Greenline TexMade posts of 100% post-consumer recycled PE and textile waste.



All decks are supported by uniquely designed low-carbon aluminum profiles with multiple attachment options. The grey-colored molded decks are made of 75% post-consumer ocean waste PP material with a non-skid pattern and texture surface.

Item no. PCM300531-0603					
Installation Information					
Max. fall height	1'11'				
Safety surfacing area	540ft ²				
Total installation time	24.8				
Excavation volume	0.68yd ³				
Concrete volume	0yd ³				
Footing depth (standard)	2'0'				
Shipment weight	1670lbs				
Anchoring options	In-ground 🗸				

Warranty Information				
EcoCore HDPE	Lifetime			
Post	10 Years			
PP Decks	10 Years			
Spare Parts Availability	10 Years			



The slides can be chosen in six different colors and three materials: Straight or curved onepiece molded PE slides. Combined EcoCore™ sides and stainless steel. Full stainless steel in a one-piece design for more vandalism-proof solutions.



Colored steel components have a base of hotdip galvanization and a powder-coated top finish. This provides ultimate corrosion resistance in all climates around the world.



KOMPAN GreenLine versions are constructed with the most environmentally friendly materials with the lowest possible CO2e emission factor. TexMade posts, EcoCoreTM panels of 100% post-consumer recycled ocean waste, and molded PP decks.

Elevated activities 9	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	9	3	3
Required	5	3	3

ASTM F1487 compliant

Sustainability Data

Cradle to Gate A1-A3

PCM300531-0651


PCM300531-0603

PCM300531



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark







Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Play systems" represented by item no.: PCM200321-0950.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

Somo

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000



By Bu www.b



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Total CO2

emission

kg CO₂e

929.43

1.004.24

CO2e/kg

kg CO₂e/kg

1.62

1.76

Recycled

materials

%

65.55


27.05





PCM300531



* Max fall height | ** Total height | *** Safety surfacing area

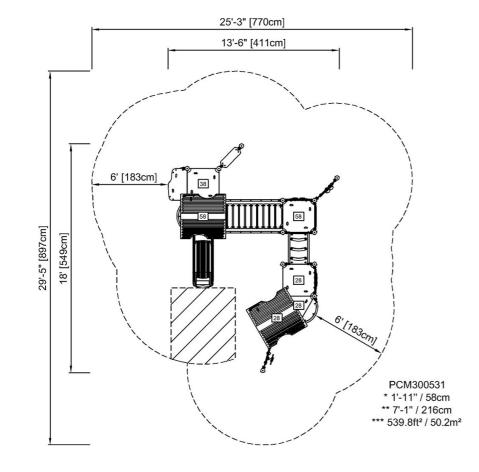





PCM300531

Click to see TOP VIEW

5 / 09/05/2024