
COR101202




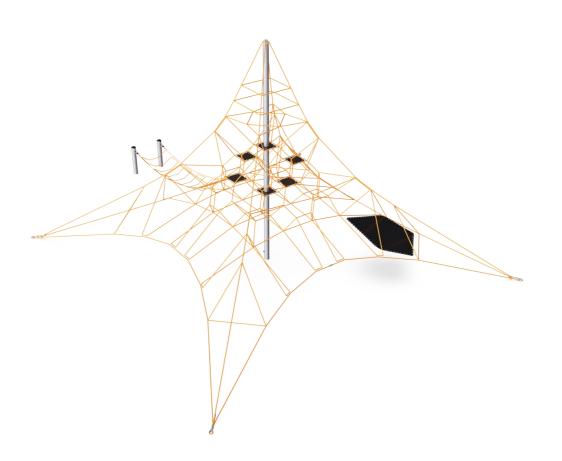


The Small Spacenet with extensions is a bouncy, transparent play shape that entices children to climb up high. When they get to the top the feeling of achievement is phenomenal. It will attract children again and again. Climbing or swaying in the bouncy net is challenging. It trains the motor skills' ABCs: Agility, Balance and Coordination. The children use major

muscle groups to climb here: arms push and pull, legs push and the core provides stability. The membranes invite breaks and children practice social-emotional skills, such as courage and self regulation, in the net.

Item no. COR101202-1104				
General Product Information				
Dimensions LxWxH	1095x900x580 cm			
Age group	5 - 12			
Play capacity (users)	24			
Colour options				

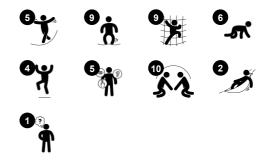

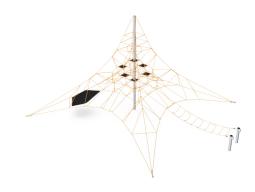


COR101202





### Waggle bridge

Physical: sense of balance and training of cross coordination. Important for other skills such as being able to sit still. Social-Emotional: turn-taking and helping others when climbing up.

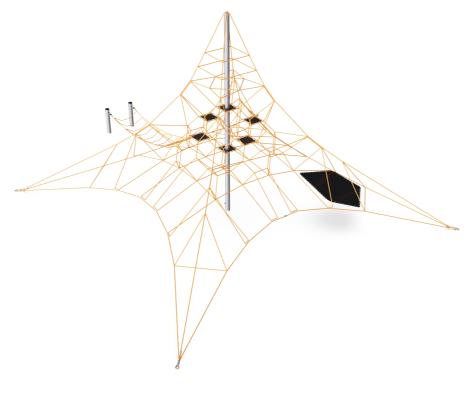





#### Mast

Physical: the slightly swaying mast stimulates children's muscles and motor skills when they hold tight climbing the net. Social-Emotional: children develop courage and self-regulation when climbing up high. This positively affects self-confidence.



**Bouncy net meshes** 



Physical: agility, balance and coordination as

well as spatial awareness are supported when

bouncing, climbing and sitting in the net.

and core, and build bone density when

jumping down. Social-Emotional: the

and cooperation. Cognitive: physical

memory, logical thinking, concentration.

Children use muscle strength of arms, legs

bouncing, swaying net appeals to empathy







### Sturdy, lower rungs

Physical: the stiff bounce of the lower rung supports balance and coordination as well as strengthens bone density when jumping down. Hanging from the arms trains back and upper body muscles, supporting good posture. These are a growing concern for children due to sedentary lifestyles. Social-Emotional: great meeting point allowing socializing.







### **Highest rungs**

Physical: spatial awareness is supported, arm muscles when holding tight. Social-Emotional: children develop courage, self-confidence, consideration and turn-taking, all important life skills.







Physical: the big meshes allow for climbing and crawling, supporting proprioception, cross coordination and spatial awareness. Climbing here takes muscle strength, pushing and pulling arms to get upwards. Social-Emotional: allow more children being seated together, sharing.







#### Membrane

**Physical:** the bouncy membrane develops the sense of balance when the child stands, steps or sits here. A faster way up, due to the extra support of the membrane. **Social-Emotional:** a meeting point for retreat from the rope landscape.

COR101202





Ropes of UV-stabilized PES rope strands with inner steel cable reinforcement. The polyester yarn is made from +95% post-consumer materials and is inductively melted onto each strand. The ropes are highly wear-and vandalism-resistant and can be replaced at site if needed.



Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.



The spacenets' main bearing ropes are equipped with an additional safety feature: should the main connections fail, the safety rope prevents collapse of the structure.



Installation Information Max. fall height 185 cm Safety surfacing area 140.6 m<sup>2</sup> Total installation time 19.1 Excavation volume 9.68 m<sup>3</sup> Concrete volume 6.16 m<sup>3</sup>

Item no. COR101202-1104

Footing depth (standard) 110 cm Shipment weight 772 kg Anchoring options In-ground

Warranty Information	
Corocord rope	10 years
Membrane	2 years
S-Clamps	10 years
Spare parts guaranteed	10 years
Steel post HDG	Lifetime



Corocord membranes consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armouring made of woven polyester. The armouring and the two surface layers result in a total thickness of 7.5 mm.



In the centre of the net is the mast, made of high quality seamless steel. The structure of the mast as an oscillating support is statically favourable and equalizes the oscillations in the net. The masts are hot dip galvanised as standard, with the design option of additional powder coating.



Huge spacenet structures are secured to the foundation with a system of three turnbuckles. Horizontal and vertical edge cables are fixed to individual turnbuckels, wich then connect to individual steel anchors. This system ensures that each edge cable can be tensioned separately and increases strucutral safety by way of independent anchoring.


Elevated activities 0	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	0	1	1
Required	0	1	1

**CSA** compliant

# **Sustainability Data**

COR101202



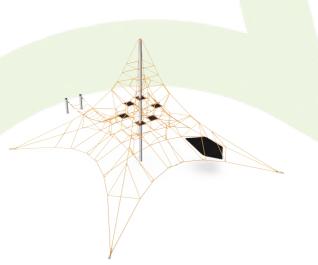

Cradle to Gate A1-A3	Total CO <sub>2</sub> emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
COR101202-1104	1,921.75	3.38	44.36

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

### Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



### Verification of CO<sub>2</sub> calculation of: Corocord



Data version no. 2023-10-05

The  $\mathrm{CO}_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.:  $\mathrm{COR314011}$ -1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

misi

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of  $CO_2$  calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000





COR101202



\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

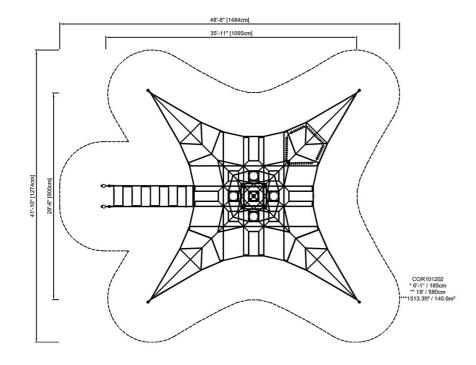

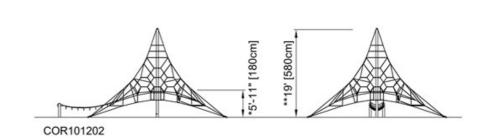

Attention! Foundation anchor blocks exceeds safety zone area. See installation instructions.

Click to see TOP VIEW

Click to see SIDE VIEW