Scooter

KPL101



Item no. KPL101-0411		
General Product Information		
Dimensions LxWxH	35x88x72 cm	
Age group	1+	
Play capacity (users)	1	
Color options	•	



The Scooter is a hugely inviting springer which attracts and supports children's relentless play time and time again. The rocking sensation provides a fantastic movement response. Movement response is one of the greatest play sensations there are. Apart from the fun, this adds a feeling of control to the child's play. The responsive movement also trains the understanding of cause and effect in young children: that actions have an effect on the world around us. This stimulates logical thinking. Rocking the Scooter trains the child's sense of balance and space as well as uses leg and arm muscles when holding tight and pushing your feet hard into the foot support. All of these basic motor and muscle skills help train the child's brain-body cognition, supporting important life skills such as being able to sit still on a chair or navigate traffic securely.



Scooter

KPL101





muscle strength.

Foot support Physical: a good footrest supports intensive rocking. Rocking stimulates the senses of balance and space that are fundamental in managing the world securely. To rock intensely also supports coordination and





Rocking spring

Physical: response to movements adds to spatial awareness and sense of balance. These are fundamental motor skills that help the child's ability to sit still on a chair which takes a good sense of balance. Cognitive: trains the understanding of cause and effect: when I move my body, the spring responds with movement.



Theme Cognitive: suggests a theme and supports dramatic play, which stimulates language and communication skills.



Handhold Physical: the vertical handgrips ensure a firm grip at different heights, necessary for rocking intensely. This trains hand and arm muscles.

Scooter

KPL101









Panels of 19mm EcoCore[™]. EcoCore[™] is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.

KOMPAN Springs are made of high quality spring steel according to EN10270. The springs are cleaned by phosphating before they are painted with an epoxy primer and a polyester powder coating as top finish. The springs are fixed by unique anti pinch fittings for maximum safety and long lifetime. The springs are fixed by unique anti pinch fittings for maximum safety and long lifetime.

Item no. KPL101-0411			
Installation Information			
Max. fall height	6	0 cm	
Safety surfacing area	7	.5 m²	
Total installation time		2.3	
Excavation volume	0.15 m³		
Concrete volume	0.00 m³		
Footing depth (standard)	45 cm		
Shipment weight	28 kg		
Anchoring options	In-ground 🗸		
	Surface	~	
Warranty Information			
EcoCore HDPE	Lifetime		
Handle	10 years		
PE/PP components	5 years		
Spare parts guaranteed	10 years		
Springs	5 years		



Handholds and footrests are made of injection moulded high quality nylon (PA6). PA6 has good wearing and impact strength.



Seat is made of a moulded PP insert with an outer soft layer of TPE rubber. TPE rubber has good shock absorption and ensures durable solution.



Sustainability Data

Cradle to Gate A1-A3

KPL101-0411

KPL101



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO, calculation of: Freestanding play equipment



Data version no. 2023-10-05

The CO, calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: GXY916012-3417.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

sund

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO, calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023



By Bureau Veritas HSE www.bureauveritas.dk

+45 7731 1000

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which

Total CO2

emission

kg CO₂e

62.13

CO2e/kg

kg CO₂e/kg

2.52

Recycled

materials


%

44.54

quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))




KPL101




KOMPAN Let's play

* Max fall height | ** Total height

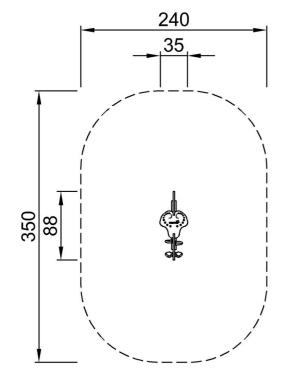

KPL101 *60cm **72cm ***7.5m²



KLP101

Click to see TOP VIEW

Click to see SIDE VIEW

5 / 12/10/2024