Decline Bench

FPW204



Item no. FPW20400-0900		
General Product Information		
Dimensions LxWxH	151x89x81 cm	
Age group	8+	
Play capacity (users)	1	
Colour options		





The decline bench, similar to the straight bench, is perfect for training the core with lower back and ab exercises such as leg lifts and sit ups. The bench has a 15° decline, increasing the difficulty level of the exercises, making you work out harder. The durable Ekogrip® surfacing offers perfect grip, allowing the bench to be used as a jump box for performing various step and jump exercises under all weather conditions.

Decline Bench

FPW204





Post are made of Ø101.6 x 2mm, pregalvanized carbon steel and powder coated, a great protection to all conditions.



The connectors are made of die-cast aluminium.

specially alloyed for the outdoor environments

connectors are stainless steel and protected by

and heavy usage. The screws attaching the

zinc washers.



The surface is made of Ekogrip[™] panels, consisting of 15mm polyethylene with a 3mm top-layer of thermoplastic rubber. The Ekogrip[™] panels have a non-skid effect for comfortable and safe training at all weather circumstances.

Max. fall height	62	2 cm
Safety surfacing area	14.	1 m²
Total installation time		2.9
Excavation volume	0.0	9 m³
Concrete volume	0.0	0 m³
Footing depth (standard)	90) cm
Shipment weight	6	4 kg
Anchoring options	In-ground	~
	Surface	~

Warranty Information

Connectors	10 years
EcoCore HDPE	Lifetime
Hot dip galvanised steel	Lifetime
Post	10 years
Spare parts guaranteed	10 years



Sustainability Data

Cradle to Gate A1-A3


FPW20400-0900

FPW204



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark







Data version no. 2023-10-05

The CO_2 calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Fitness" represented by item no.: FAZ10100-0900.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Total CO2

emission

kg CO₂e

92.73

CO2e/kg

kg CO₂e/kg

2.42

Recycled

materials

%


50.53




FPW204



* Max fall height | ** Total height

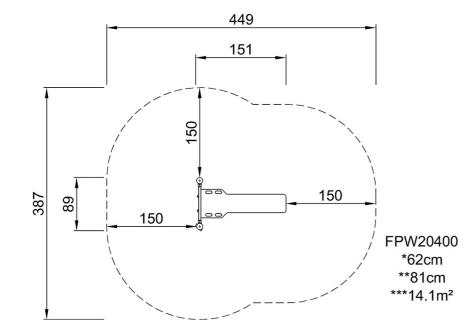



FPW20400 1:100

Click to see TOP VIEW

4 / 10/21/2024