


Circite Flowite

COR10484

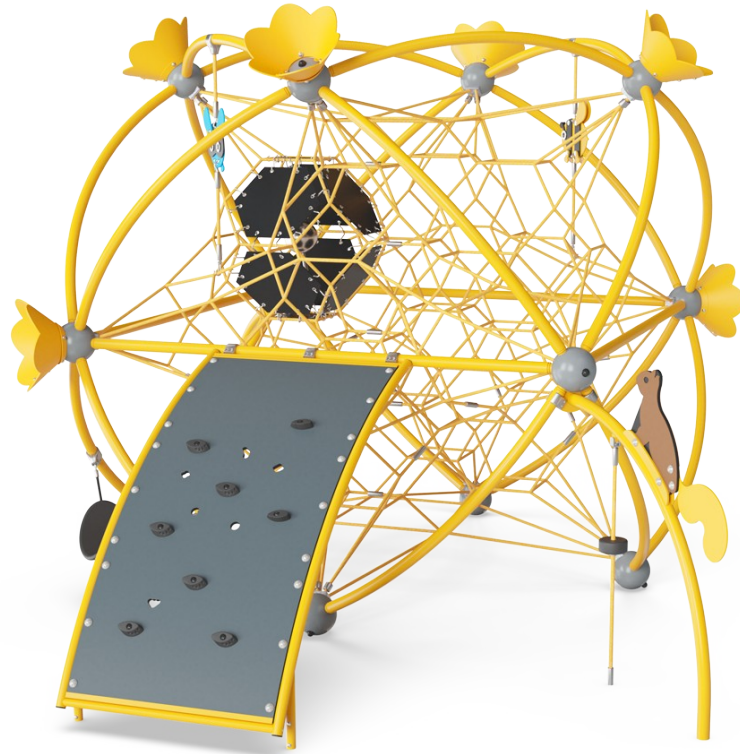


The Circite Flowite net environment with its whimsical nature themes, break-out points and sound elements appeals immensely to young children. It invites endless playful exploration, again and again. The rich variation of climbing and bouncing stimulates the cross-body coordination and sense of balance. The ground level meeting and bouncing points invite all

users. The Circite Flowite is an open design, allowing for communication across the structure. The Membrane den in the middle of the structure is an evident destination point, which further motivates climbing and adds a central meeting point for nurturing friendships or taking a break. The varied climbing: stable and bouncy, train important motor skills such as


proprioception and cross-body coordination. The heights train spatial awareness, all skills fundamental for e.g. managing traffic safely.

| | |
|------------------------------------|----------------|
| Item no. COR104841-0405 | |
| General Product Information | |
| Dimensions LxWxH | 644x484x325 cm |
| Age group | 3+ |
| Play capacity (users) | 35 |
| Color options | |

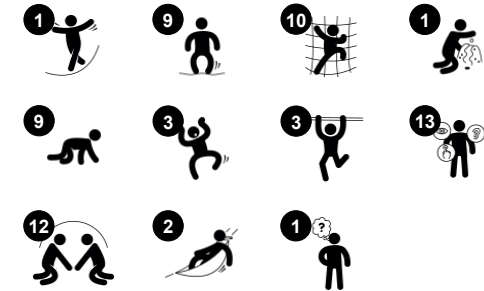

Circite Flowite


COR10484

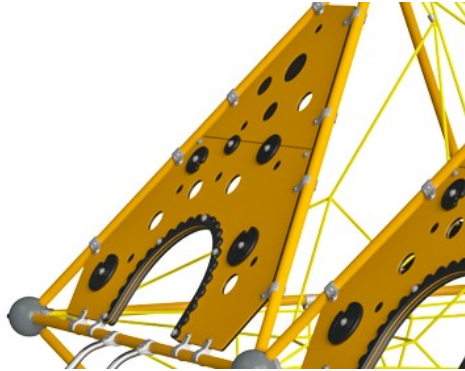

Climbing panel of 19mm EcoCore™. EcoCore™ is a highly durable, eco-friendly material, which is not only recyclable after use, but is also made of +95% recycled post-consumer material from e.g., food packing waste in both core and colorful outer layer.




Corocord 'S' clamps are used as universal connections in Corocord products. 8mm stainless steel rods with rounded edges are pressed around the ropes with a special hydraulic press, making them the ideal connector: safe, durable and vandalism-proof, all while allowing the typical movement of rope play structures.

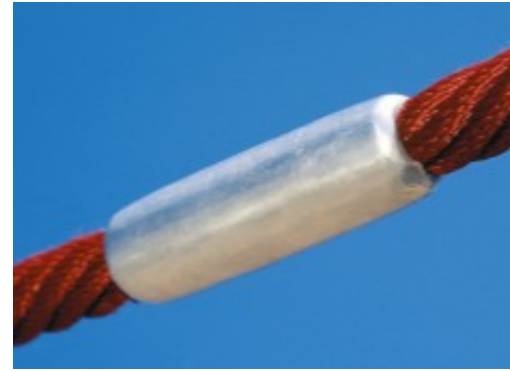

The aluminium swages of the net are double conical with rounded ends and are as small as safety allows. The overall net design aims at keeping metal parts within the net to an absolute minimum, both in size and number, in order to provide the best possible rope climbing experience.


| Item no. COR104841-0405 | |
|--------------------------|---------------------|
| Installation Information | |
| Max. fall height | 300 cm |
| Safety surfacing area | 53.0 m ² |
| Total installation time | 28.5 |
| Excavation volume | 3.46 m ³ |
| Concrete volume | 1.91 m ³ |
| Footing depth (standard) | 110 cm |
| Shipment weight | 893 kg |
| Anchoring options | In-ground ✓ |

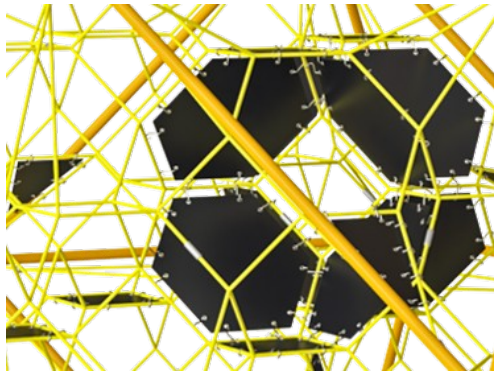

Corocord membranes consist of friction-proof rubberized material of conveyor belt quality with excellent UV resistance. Tested and compliant with REACH requirements for PAH. Embedded is a four-layered armoring made of woven polyester. The armoring and the two surface layers result in a total thickness of 7.5 mm.



The metal parts are made of high quality steel, hot dip galvanised inside and outside with leadfree zinc. On the outside, there is an additional layer of powder coating. This ensures both excellent corrosion resistance and colourful design expression.

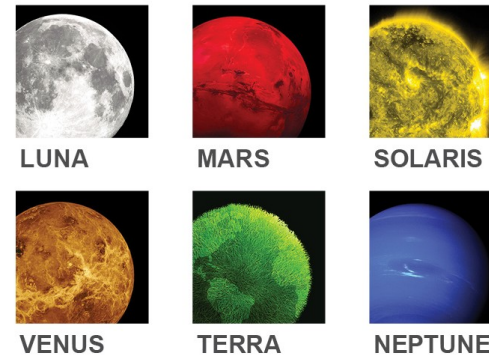


The COROCORD Frame Nets are available in 6 galactic colour themes. The themes draw on bright colours that appeal to children of all ages. Can be changed in the configurator.



Sustainability Data

COR10484

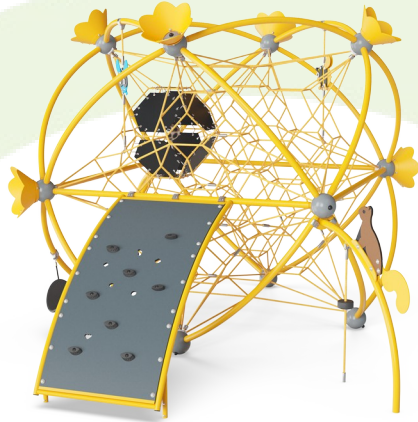


| Cradle to Gate A1-A3 | Total CO ₂ emission | CO ₂ e/kg | Recycled materials |
|-----------------------|--------------------------------|-------------------------|--------------------|
| | kg CO ₂ e | kg CO ₂ e/kg | % |
| COR104841-0405 | 2,511.60 | 3.88 | 35.10 |

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S
 C.F. Tietgens Boulevard 32C
 DK-5220 Odense SØ
 Denmark



Verification of CO₂ calculation of: Corocord



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Corocord" represented by item no.: COR314011-1101.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025

Verified by:

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO₂ calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE
 www.bureauveritas.dk
 +45 7731 1000





Circite Flowite

COR10484

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

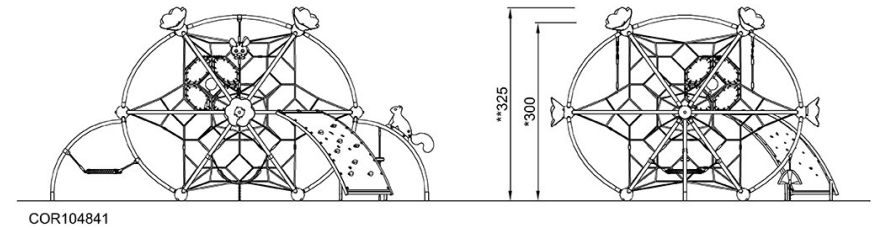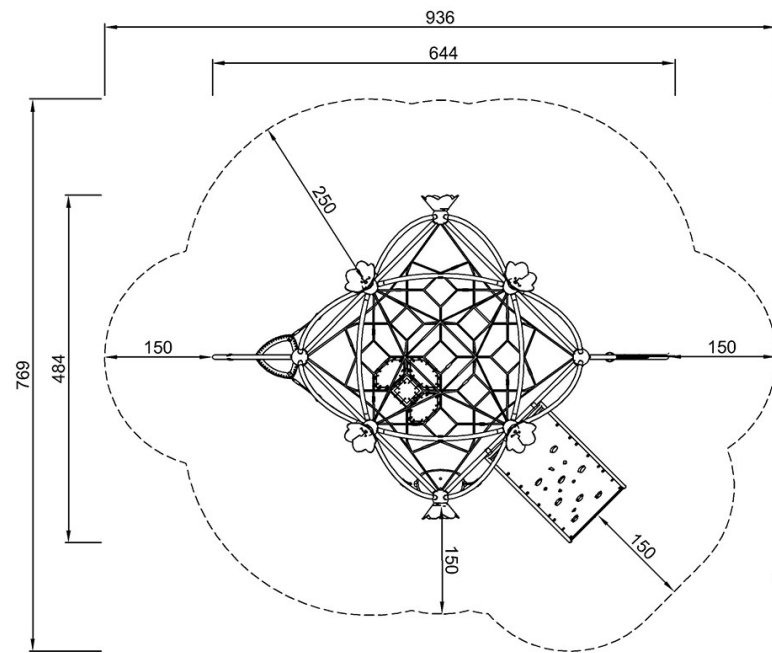

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)