GXY964



Item no. GXY964012-3717			
General Product Information			
Dimensions LxWxH	24'0"x20'2"x10'3"		
Age group	5 - 12		
Play capacity (users)	16		
Color options			



With its spinning, swaying angles and shapes, POLLUX attracts thrilling balance play in 6-15 year olds. The inclined spinners invite small or bigger groups of children to spin till they get dizzy. This is a favourite activity of middle school children. It will attract them for a long time, again and again. The overhead rocking activity and the swaying ropes with UFO's are

attractive trainers of upper body strength and cooperation with peers. This is also great for those seated on top, being rocked. The Rocking Tube makes a really challenging climber to the Triangle Plates. These, and the play shell in the opposite Stabile provides rocking meeting points. The wide variety of spining, climbing, swaying and hanging

activities intensely train the child's coordination and sense of balance, important motor skills for sitting still on a chair. The meeting points encourage cooperation and turn-taking, skills easily learned in play.



GXY964





Open triangle plate Physical: arm, leg and core muscles are developed by climbing up and through. Proprioception and spatial awareness are supported, both motor skills that help navigating the body in space. Social-Emotional: swaying seat for a break, inviting socializing and turn-taking.





#### Musca spinner

Physical: balance when standing, sitting and rotating, muscles develop when holding tight. **Social-Emotional:** cooperation in getting the spinner to turn.



### Overhead rocker

Physical: arm, leg and core muscles climbing up and through. Proprioception and spatial awareness are supported when climbing through, both motor skills that help in judging the body in space. **Social-Emotional:** cooperation when rocking from both sides. Swaying seat for a break, inviting socializing and turn-taking.



### Satellite spinner

Physical: balance when standing, sitting and rotating, muscles develop when holding tight. Social-Emotional: turn-taking, socializing. Cognitive: logical thinking, figuring out how to make the spinner work with gravity, not against it.



#### Play shell

Physical: the swaying movement stimulates the sense of balance, necessary to sit still on a chair. Social-Emotional: meeting, taking a break and turn-taking are supported, skills necessary to learn how to avoid conflicts.



### Climbing plate

Physical: trains balance and sense of space when children are standing, using leg and core muscles. Jumping off strengthens bone density. Facilitates sitting and lying, which supports people of all abilities. Social-Emotional: swaying seat for a break, inviting socializing and turn-taking. Inclusive. Point for gathering and for assistance from caregivers..



#### Rocking tube Physical: muscle stren

**Physical:** muscle strength, balance and coordination when climbing up and down, rocking and holding tight.

GXY964





The steel surfaces of GALAXY are hot dip galvanized inside and outside with lead free zinc. The galvanization has excellent corrosion resistance in outside environments and requires low maintenance.



Larger activities are made of 100% recyclable PE. The play shell displayed is molded in one piece with a minimum 5mm wall thickness. PE has high impact resistance across a wide temperature span which ensures vandal resistance in all locations.



GALAXY climbing triangle with outer soft layer of PUR and corner brackets of moulded nylon (PA6). The core consist of a powder coated welded steel frame with integrated corner suspension points. Larger triangles are closed with an 18mm thick Ekogrip® panel that has a top-layer of rubber with a non-skid effect.

Item no. GXY964012-3717				
Installation Information				
Max. fall height		8'3"		
Safety surfacing area	803ft <sup>2</sup>			
Total installation time	20.0			
Excavation volume	7	.02yd³		
Concrete volume	2	.96yd³		
Footing depth (standard)		2'11"		
Shipment weight	20	)35lbs		
Anchoring options	In-ground 🗸			
	Surface	~		
Warranty Information				
Galaxy connection ball	5	Years		
Hot dip galvanized steel	Li	fetime		
PUR components	10	Years		
Ropes & nets	10 Years			
Spare Parts Availability	10 Years			



Bearing systems in heavy duty design in a maintenance free construction. All steel bearings are fully closed and lifetime lubricated.



The unique designed GALAXY connection ball is made with an inner circular core of aluminium surrounded by a shell of hard PP with a outer layer of soft TPV rubber. Flexible lead free aluminium connectors allow for installation in variable angles.



Galaxy products are available in different color combinations with either hot dip galvanized steel surface treatment or optional with powder top finish of selected steel components. Colors of the activities are adjusted to support the individual color combination.

Elevated activities <b>0</b>	Accessible elevated activities	Accessible ground level activities	Accessible ground level play types
Present	0	6	4
Required	0	4	4

ASTM F1487 compliant

# **Sustainability Data**

Cradle to Gate A1-A3

GXY964012-3717


GXY964



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



### Verification of CO<sub>2</sub> calculation of: Challengers & Climbers



### Data version no. 2023-10-05

The  $CO_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Challengers & Climbers" represented by item no.: BLX410301-3717.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

## mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO<sub>2</sub> calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

**By Bureau Veritas HSE** www.bureauveritas.dk +45 7731 1000



The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

**Total CO2** 

emission

kg CO<sub>2</sub>e

2,168.74

CO2e/kg

kg CO<sub>2</sub>e/kg

3.17

Recycled

materials


%


37.28

GXY964

\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

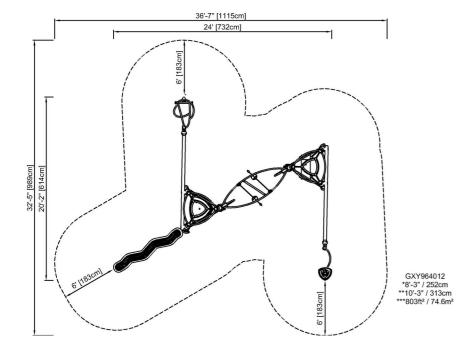



GXY964012

Click to see TOP VIEW

Click to see SIDE VIEW



