## **Tree Castle**

NAT506





General Product Information

Dimensions LxWxH 161x371x218 cm
Age group 1+
Play capacity (users) 9

Color options



The Tree Castle with its spacious look-out tower, red slide and challenging wackle bridge attracts children immediately: they want to balance the bridge to the platform, have a view through the binoculars before whizzing down the slide. And then they want to repeat that loop, again and again. The versatile motor skill and muscle training for toddlers cover

movement needs: they train their balance, spatial awareness and cross-coordination when crawling up the stairs onto the wobbly bridge and then onto the platform. These motor skills stimulate the body awareness and build confidence. When sliding from the Tree Castle, toddlers train their trunk stability and sense of balance. This is fundamental for being able to

sit still and concentrate. The platform window and binoculars invite socializing, so toddlers can make friends in play.



## **Tree Castle**

NAT506






Posts and boards are made of pine wood from sustainable European sources. The wood is pressure impregnated Class 3 with Tanalith E3475 according to EN335 (Equivalent to NTR Class AB). On request it can be supplied as FSC® Certified (FSC® C004450).



Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of material produced from +95% recycled post consumer material from food packing waste.

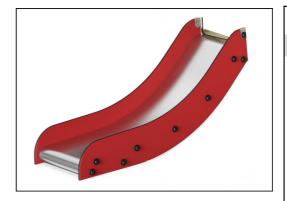

The slide is made of combined EcoCore™ sides and stainless steel slide bed t=2mm.

| Item no. NAT506-0612     |                          |           |       |    |  |  |
|--------------------------|--------------------------|-----------|-------|----|--|--|
| Installation Information |                          |           |       |    |  |  |
|                          | Max. fall height         |           | 100 d | m  |  |  |
|                          | Safety surfacing area    |           | 22.2  | m² |  |  |
|                          | Total installation time  |           | 11    | .6 |  |  |
|                          | Excavation volume        |           | 0.76  | m³ |  |  |
|                          | Concrete volume          |           | 0.00  | m³ |  |  |
|                          | Footing depth (standard) |           | 61 d  | cm |  |  |
|                          | Shipment weight          |           | 256   | kg |  |  |
|                          | Anchoring options        | In-ground | b     | ~  |  |  |
|                          |                          | Surface   |       | •  |  |  |



Binoculars are made of PUR. All components retain their properties in the temperature range of -30°C to 60°C. Material is UV stabilised.



The support chains of the hang bridge are made of high-quality stainless-steel to ensure durability of the product.



The steel surfaces are hot dip galvanized inside and outside with lead free zinc. The galvanization has excellent corrosion resistance in outside environments and requires low maintenance.





# **Sustainability Data**

NAT506





| Cradle to Gate A1-A3 | Total CO <sub>2</sub> emission | CO₂e/kg    | Recycled materials |
|----------------------|--------------------------------|------------|--------------------|
|                      | kg CO₂e                        | kg CO₂e/kg | %                  |
| NAT506-0612          | 234.70                         | 1.14       | 35.80              |

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

#### Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



### Verification of CO<sub>2</sub> calculation of: Nature play



Data version no. 2023-10-05

The  $\mathrm{CO}_2$  calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Nature play" represented by item no.: NRO409-0621.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

Some

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of  $CO_2$  calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023

By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000




## **Tree Castle**


NAT506



\* Max fall height | \*\* Total height | \*\*\* Safety surfacing area

\* Max fall height | \*\* Total height

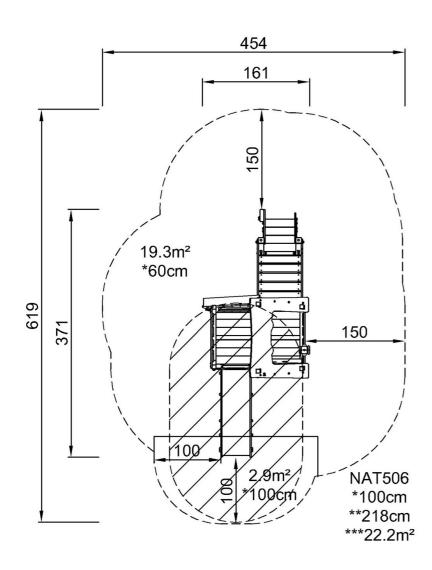

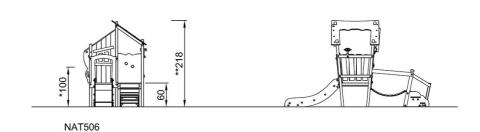

Click to see TOP VIEW

Click to see SIDE VIEW