Cradle Seat, H:2.0m

SW990025



Item no. SW990025-00		
General Product Information		
Dimensions LxWxH	62x31x162 cm	
Age group	1+	
Play capacity (users)	1	
Color options		





The classic Cradle Seat Swing is an irresistible invitation for infants and their care givers. The swinging motion of the Baby Seat Swing will make infants want to go again and again. There are several benefits of the attraction: firstly, the swing seat supports the seated infant all around so that the feeling of security is guaranteed. Secondly, the swinging motion trains the child's motor skills, specifically the sense of balance and space. Seated while swinging also trains the core muscles. All of these physical skills are fundamental to the infants ability to walk and navigate their surroundings securely. The action also stimulates the understanding of cause and effect and thinking skills. Socially, swinging and getting pushed in the swing seat by parents, care givers or siblings is great fun.



Cradle Seat, H:2.0m

SW990025







Stepping point is made of SBR rubber. It has good heat and abrasion resistance.

The seats are available with swing chains of either hot dip galvanised steel or stainless steel for all swings heights.

Item no. SW990025-00		
Installation Information		
Max. fall height	0 cm	
Safety surfacing area	12.3 m²	
Total installation time	0.2	
Excavation volume	0.00 m³	
Concrete volume	0.00 m³	
Footing depth (standard)	0 cm	
Shipment weight	9 kg	
Anchoring options		



Sustainability Data

Cradle to Gate A1-A3

SW990025-00

SW990025



Kompan A/S C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Verification of CO, calculation of: Freestanding play equipment



Data version no. 2023-10-05

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Freestanding play equipment" represented by item no.: KSW92011-0910.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 30. October 2023 | Valid until: 30. October 2025 Verified by:

mais

Julie Marie Vejsgaard Larsen, LCA & EPD Consultant

Verification based on report: Validation of CO, calculation of 9 categories of Kompan product line, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Julie M. V. Larsen.

Publication date: 30. October 2023





The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Total CO2

emission

kg CO₂e

57.00

CO2e/kg

kg CO₂e/kg

7.40

Recycled

materials

%


17.50





SW990025

* Max fall height | ** Total height | *** Safety surfacing area



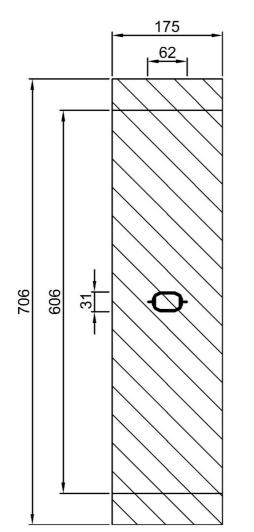



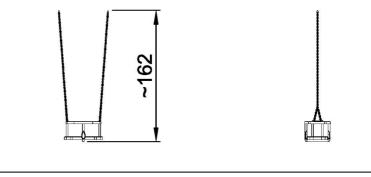

SW990025 1:100

Click to see TOP VIEW

Click to see SIDE VIEW